




TOCCATA

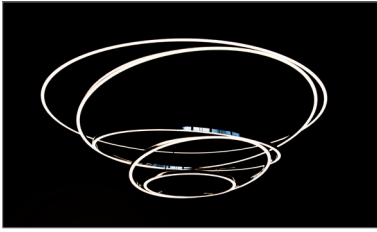


Housing: Pendant light with direct light distribution, 3/ 5 parts aluminum profile, with integrated acrylic cover.
 Design: MARKUS BISCHOF

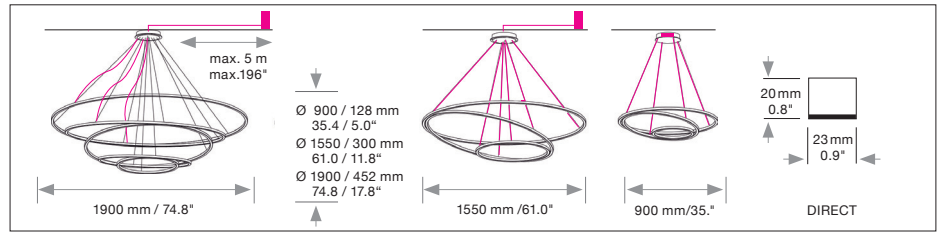


Mounting Version




4/6/14-point suspension with external power supply unit in suspended ceiling




Standard
 Ø 1900 mm / 74.8"
 14 suspensions through canopy and 3 power supply cables with external power supply unit in suspended ceiling



Standard
 Ø 1550 mm / 61.0"
 6 current-carrying steel cables with external power supply unit in suspended ceiling



Standard
 Ø 900 mm / 35.4"
 4 current-carrying steel cables. with power supply in canopy



Standard
 Ø 900 mm / 35.4"
 4 suspensions through canopy with external power supply unit in canopy

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.


I / J = Distance of external power supply unit to light fixture max. 10m / 394".



F, E = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Mounting version with steel cable length 5 m / 197" and power supply cable, length 2 x 5 m / 2 x 196" (1550, 1900)

Complete order number

Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
 DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	Ø 900	A
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	Ø 1550	I, J, A
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	Ø 1900	I, J, A

Dimensions of canopy			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body		
 DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	Ø 900	F, E
Canopy finish: white (11)			
 DB 230S	Ø 230 / 210mm / 9.0 x 8.3"	Ø 1550 / 1900	I, J
Base finish white (11), Cover white (11) If finish (22), Cover aluminium polished (22) contact factory for other finishes USA/Canada: Canopy mounts to 4" octagonal junction box.			

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**




CASAMBI wall-switch

white
black

207. 00. 00. 00. 11
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



Ceiling fixation for mounting version A (3x)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.



Light distribution direct



Conforms to UL-STD 1598
 Certified to CSA-STD C22.2
 No.250.0-08