



BE2

Housing: Recessed downlight with aluminium frame

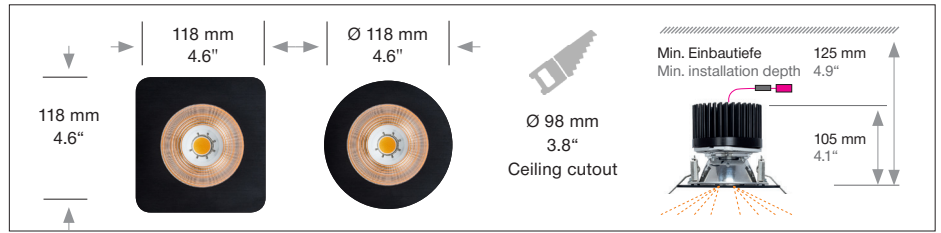

Size	Size: L x W / Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs ²⁾	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
	118 x 118	4.6 x 4.6	18°	18	2000	0,4 / 0.88	1016.	x x.	x x.	x x.	x x.	x x x.	x
	118 x 118	4.6 x 4.6	30°	18	2000	0,4 / 0.88	1017.	x x.	x x.	x x.	x x.	x x x.	x
	118 x 118	4.6 x 4.6	55°	18	2000	0,4 / 0.88	1018.	x x.	x x.	x x.	x x.	x x x.	x
	Ø 118	Ø 4.6	18°	18	2000	0,4 / 0.88	1510.	x x.	x x.	x x.	x x.	x x x.	x
	Ø 118	Ø 4.6	30°	18	2000	0,4 / 0.88	1511.	x x.	x x.	x x.	x x.	x x x.	x
	Ø 118	Ø 4.6	55°	18	2000	0,4 / 0.88	1512.	x x.	x x.	x x.	x x.	x x x.	x
ideal for a ceiling thickness of 1-25 mm													
LED CRI > 97		Standard:	Neutral-white		4000 K		x x x x.	40.	x x.	x x.	x x.	x x x.	x
		Optional:	Warm-white		3000 K		x x x x.	30.	x x.	x x.	x x.	x x x.	x
			Extra warm-white		2700 K		x x x x.	27.	x x.	x x.	x x.	x x x.	x
Dimming		Standard:	Without Dimming				x x x x.	x x.	01.	00.	x x.	x x x.	x
		Optional:	Dimmable DALI				x x x x.	x x.	61.	00.	x x.	x x x.	x
			Switch Dim, ready2mains™				x x x x.	x x.	81.	00.	x x.	x x x.	x
		Dimmable CASAMBI				x x x x.	x x.	91.	00.	x x.	x x x.	x	
		Bluetooth 4.0 remote control through app.											
		ENOCEAN wireless push button				x x x x.	x x.	91.	00.	x x.	x x x.	x	
Finishes		Standard:	11				x x x x.	x x.	x x.	x x.	--.	x x x.	x
			white RAL 9010										
		Optional:	10	62	22	60							
			black	black anodised	aluminium polished	silver anodised							
Power supply	included, downlight and power supply connected with plug for easy installation												
Option	IP 44 upgrade 210.00.00.00.00 Suitable for concrete mounting kit: (recommended) e.g. KAISER 1290-40 without power supply KAISER 1290-41 with transformer tunnel												
For order quantities of more than 30 pieces, measures of the aluminium frame can be individually adjusted.													
Input voltage for all external power supply units and canopy is 198-264 VAC 50/60 Hz						Complete order number: <input type="text" value="--."/> <input type="text" value="--."/> <input type="text" value="--."/> <input type="text" value="00."/> <input type="text" value="--."/> <input type="text" value="--."/> <input type="text" value="V"/>							

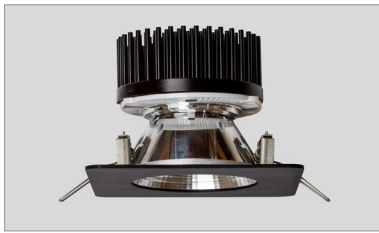