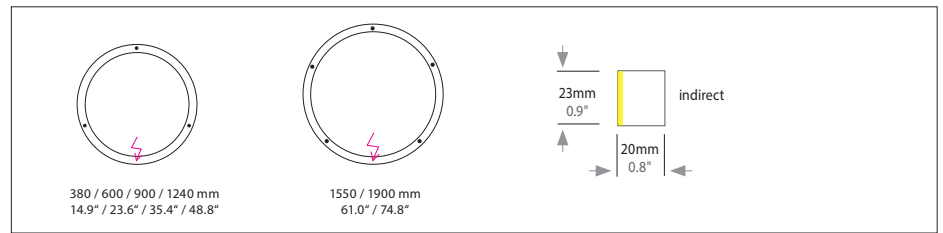
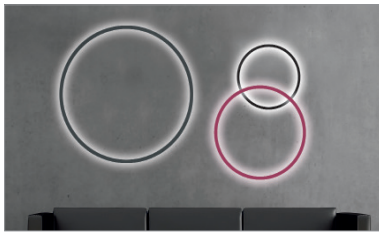






SLIM WALL

Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER



	Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 380 mm	14.9"	9	505	1.0 / 2.2	727.	X X.	X X.	X X.	X X.	X X X.	X X
	Ø 600 mm	23.6"	13	875	1.0 / 2.2	728.	X X.	X X.	X X.	X X.	X X X.	X X
	Ø 900 mm	35.4"	22	1.276	1.5 / 3.3	729.	X X.	X X.	X X.	X X.	X X X.	X X
	Ø 1240 mm	48.8"	28	1.620	2.5 / 5.5	730.	X X.	X X.	X X.	X X.	X X X.	X X
	Ø 1550 mm	61.0"	37	2.109	3.0 / 6.6	731.	X X.	X X.	X X.	X X.	X X X.	X X
	Ø 1900 mm	74.8"	43	2.537	3.5 / 7.7	732.	X X.	X X.	X X.	X X.	X X X.	X X
LED		Standard:	Warm-white	3000 K		X X X.	30.	X X.	X X.	X X.	X X X.	X X
		Optional:	Neutral-white Extra warm-white	4000 K 2700 K		X X X. X X X.	40. 27.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	X X X X
Dimming		Standard:	Without Dimmer			X X X.	X X.	01.	00.	X X.	X X X.	X X
		Optional:	0 - 10 V DALI CASAMBI			X X X. X X X. X X X.	X X. X X. X X.	51. 61. 81.	00. 00. 00.	X X. X X. X X.	X X X. X X X. X X X.	X W X W X W
Finish		Standard:	12 white, powder coated, similar RAL 9003									
		Optional (Powder coated):	11 white, similar RAL 9010 10 black fine textured 30 anthracite fine textured 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper									
Power supply cable		Optional (Premium):	22 aluminium polished 27 brush-finished aluminium XX Custom finish			X X X.	X X.	X X.	X X.	X X.	X X X.	X X
		Standard	Mountingversion W Z 80 black matt Mountingversion L Z 90 PVC cable black			X X X.	X X.	X X.	X X.	X X.	X X.	X X



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08



Protective rating of luminaire



Indirect light distribution



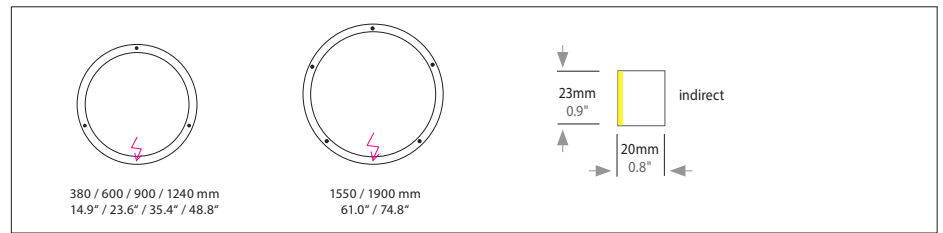
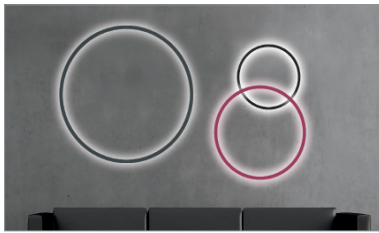
Protection class III: only suitable for very low voltage supply (<50V)







Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

SLIM WALL

Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER




Mounting version

Mounting version	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
 K Wall bracket 85 mm / 3.3" (white)	Standard	X X X.	X X.	X X.	X X.	X X X.	K X
 J Wall bracket 115 mm / 4.5" (white)	Optional	X X X.	X X.	X X.	X X.	X X X.	J X
W Remote power supply for intermediate wall 	Standard	X X X.	X X.	X X.	X X.	X X X.	X W
L Plugged on the light, cable including country-specific plug 	Optional	X X X.	X X.	X X.	X X.	X X X.	X L

Wall brackets in white. Upon request in aluminium polished.

Complete order number

Power supply unit:		
	Type / Size mm / inch L x W x H	For use with Mounting version
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	W
		Protective rating IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Optional



CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)



Handcrafted in Germany, certified quality



Conforms to
UL-STD 1598
Certified to
CSA-STD C22.2
No.250.0-08



Protective rating of luminaire



Indirect light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.