


AVVENI

DOWNLIGHT pure





SATTLER



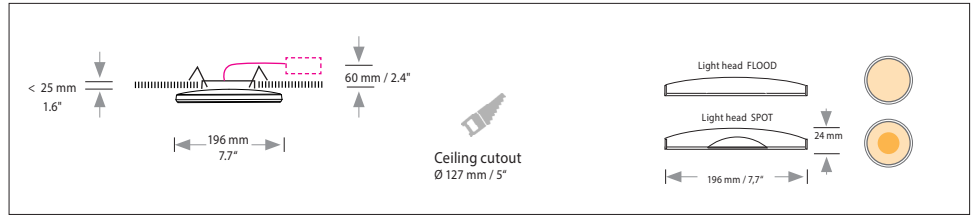


Product-information: Light heads are available as flood or spot versions (lenses with 26 and 34 degrees).
Design: Ulrich Sattler | Michael Schmidt, Code2design



STRUCTURE

					STRUCTURE				
Type	Installation Ø / depth mm	Installation Ø / depth inches	LED Watt	weight kg ²⁾ / lbs ²⁾	Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	Ø 127 / 60mm	Ø 5 / 2.4"	12,5 W	0.8 / 1.8	1157.	XX.	XX.	XX.	XX.
Finish 1					XXXX.	00	XX.	XX.	XX.
Dimmer	 DALI-2 TRIAC			Standard	XXXX.	XX.	06	XX.	XX.
					XXXX.	XX.	11	XX.	XX.
Power Supply Cable	without visible power supply cable				XXXX.	XX.	XX.	00	XX.
Mounting Version	 U up to ceiling thickness ≤ 25 mm			Standard	XXXX.	XX.	XX.	XX.	0U
	Recessed in ceiling with external power supply								
					Order No. STRUCTURE				

LIGHT HEAD

					LIGHT HEAD				
Type	Finish 2	Finish 3	LED		Type No.	Finish 2	Finish 3	Kelvin	Beam angle
					02	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	 12 white matt RAL 9003	 14 black matt		Standard	XX.	12	XX.	XX.	XX.
					XX.	14	XX.	XX.	XX.
Finish 3 Light head top cover same as finish 2	 12 white matt RAL 9003	 14 black matt		Standard	XX.	XX.	12	XX.	XX.
					XX.	XX.	14	XX.	XX.
LED	 Extra warm-white 2700 K				XX.	XX.	XX.	27	XX.
CRI >92		Warm-white 3000 K			XX.	XX.	XX.	30	XX.
SELV		Neutral-white 4000 K			XX.	XX.	XX.	40	XX.
Beam Angle	FLOOD	12,5 W 1282 ¹ Lumen		Standard	XX.	XX.	XX.	XX.	99 00 00
	SPOT 26°	12,5 W 1550 ¹ Lumen UGR<19			XX.	XX.	XX.	XX.	26 00 00
	SPOT 34°	12,5 W 1550 ¹ Lumen			XX.	XX.	XX.	XX.	34 00 00

Order No. LIGHT HEAD FLOOD

Order No. LIGHT HEAD SPOT

Input voltage for all external power supply units and canopies is 220-240 VAC 50-60 Hz



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

IP 20

Protective rating



Light distribution direct



Schutzklasse II Protection class II



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F.

2) Weight of lights without remote technical unit or canopy.