


ANELLO



Housing: Circular aluminium-profile with translucent foil. Direct light distribution. Additional indirect lighting possible for background lighting.
Design: SATTLER

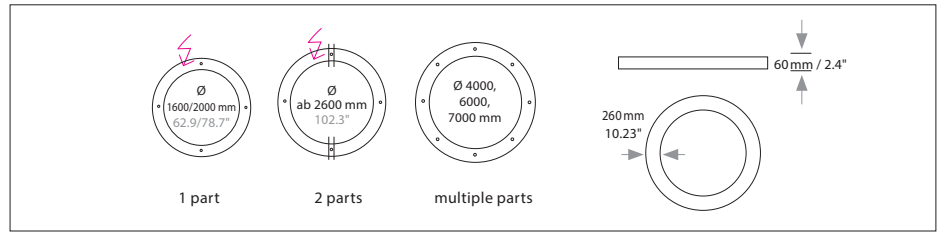

Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version	
Sizes												
Ø 1600 x 260 x 60	62.9 x 10.2 x 2.4"	240	20.383	22 / 49	288.	XX.	XX.	XX.	XX.	XX.X.	X	
Ø 2000 x 260 x 60	78.7 x 10.2 x 2.4"	300	25.150	28 / 62	290.	XX.	XX.	XX.	XX.	XX.X.	X	
Ø 2600 x 260 x 60	102.3 x 10.2 x 2.4"	380	32.306	39 / 86	292.	XX.	XX.	XX.	XX.	XX.X.	X	
Ø 4000 x 260 x 60	157.4 x 10.2 x 2.4"	620	49.000		294.	XX.	XX.	XX.	XX.	XX.X.	X	
Ø 6000 x 260 x 60	236.2 x 10.2 x 2.4"	1020	88.000		293.	XX.	XX.	XX.	XX.	XX.X.	X	
Ø 7000 x 260 x 60	275.6 x 10.2 x 2.4"	1020	89.000		295.	XX.	XX.	XX.	XX.	XX.X.	X	
DIRECT LED CRI > 90 SELV MacAdam 3 L80 B10 100.000 h		Standard: Neutral-white	4000 K		XXX.	40.	XX.	XX.	XX.	XXX.	X	
		Optional: Warm-white	3000 K		XXX.	30.	XX.	XX.	XX.	XXX.	X	
		Extra warm-white	2700 K		XXX.	27.	XX.	XX.	XX.	XXX.	X	
		Tunable white*	2700-6500 K		XXX.	80.	XX.	XX.	XX.	XXX.	X	
INDIRECT LED CRI > 90 SELV MacAdam 3 L80 B10 100.000 h		Standard: No indirect LED'S			XXX.	XX.	XX.	00.	XX.	XXX.	X	
		Optional: Neutral-white	4000 K		XXX.	XX.	XX.	40.	XX.	XXX.	X	
		Warm-white	3000 K		XXX.	XX.	XX.	30.	XX.	XXX.	X	
		Extra warm-white	2700 K		XXX.	XX.	XX.	27.	XX.	XXX.	X	
		RGB colour control*			XXX.	XX.	XX.	60.	XX.	XXX.	X	
Indirect light is significantly weaker than direct light output												
*(only in combination with dimming DALI, CASAMBI) Combinations up to two stripes of LED possible												
Dimming		Standard: Without Dimmer			XXX.	XX.	02.	XX.	XX.	XXX.	X	
		Optional: 0-10			XXX.	XX.	52.	XX.	XX.	XXX.	X	
		DALI			XXX.	XX.	62.	XX.	XX.	XXX.	X	
		CASAMBI			XXX.	XX.	82.	XX.	XX.	XXX.	X	
Finish		Standard: 12 white, powder coated, similar RAL 9003										
		Optional (Powder coated):	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined					
			35 gold	36 brass	37 bronze fine textured	38 copper						
		Optional (Premium): up to Ø 2600 mm bigger on request	22 aluminium polished	27 brush-finished aluminium	XX Custom finish							
							XXX.	XX.	XX.	XX.	XXX.	X



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating of luminaire



Direct/indirect light



Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

ANELLO



Housing: Circular aluminium-profile with translucent foil. Direct light distribution. Additional indirect lighting possible for background lighting.
Design: SATTLER

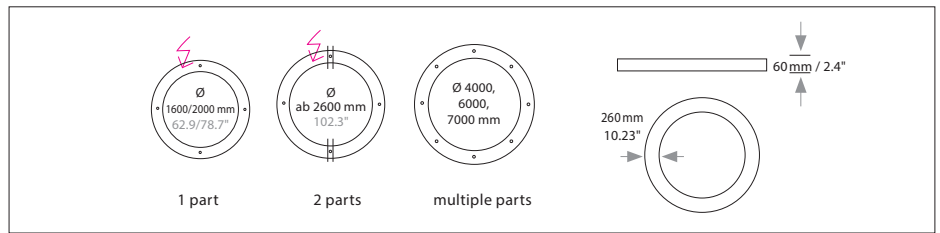

Power supply cable



Z 70
Silver

Optional:



Z 71
white



Z 72
grey



Z 73
black



Z 74
orange




Z 75
red




Z 76
green

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	---	X
X X X.	X X.	X X.	X X.	X X.	X X X	---


Mounting Version



4-point suspension with external power supply unit in suspended ceiling



Up to Ø 2000 mm 4-point suspension with external power supply unit in separate canopy



Up to Ø 2000 mm suspension through canopy

A, B, = Distance of external power supply unit to light fixture max. 10m / 394".

E = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" and power supply cable 5000mm / 197"



Complete order number

Power supply unit: (1 LED Stripe)

Type / Size mm / inch
L x W x H

For use with Mounting version

Protective rating

DE 3F 363 x 403 x 85 mm / 14.2 x 15.7 x 3.3" A IP 20

Quantity of power supply units depends on configuration

Canopy: (1 LED Stripe)

Type / Size mm / inch
Ø cover plate / body / H

For use with Mounting version

Protective rating

DB 500 Ø 510 / 470 mm / 20,0 x 18.5" B, E (up to size Ø 2000) IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating of luminaire



Direct/indirect light



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.