

# AVVENI



CEILING<sup>2</sup> symmetrical



# SATTLER

**Product-information:** Aluminium structure with 2 light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

**Design:** Ulrich Sattler | Michael Schmidt, Code2design

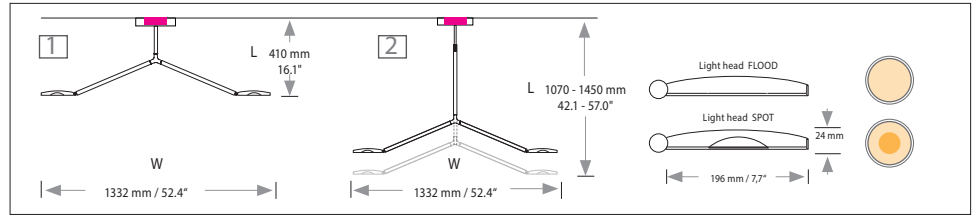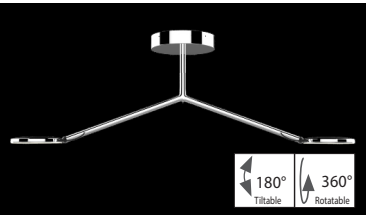

## STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg <sup>2)</sup> / lbs <sup>2)</sup>
1	L 410 / W 1332	L 16.1 / W 52.4"	25 W	3,2 / 7.1
2	L 1070 - 1450 / W 1332	L 42.1 - 57.0 / W 52.4"	25 W	3,5 / 7.7

## STRUCTURE

Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
1117.	XX.	XX.	XX.	XX.
1118.	XX.	XX.	XX.	XX.
XXXX.	12	XX.	XX.	XX.
XXXX.	14	XX.	XX.	XX.
XXXX.	22	XX.	XX.	XX.
XXXX.	XX.	05	XX.	XX.
XXXX.	XX.	06	XX.	XX.
XXXX.	XX.	08	XX.	XX.
XXXX.	XX.	XX.	00	XX.
XXXX.	XX.	XX.	XX.	0P


Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminium polished	Standard
--------------------	------------------------	---------------	-----------------------	----------

Dimmer	0-10 V DALI CASAMBI	Standard
--------	---------------------	----------

light heads only dimmable together


Power Supply Cable	without power supply cable	Standard
--------------------	----------------------------	----------

Mounting Version	P	Standard
------------------	---	----------



Direct ceiling mounting with power supply unit in canopy

Order No. STRUCTURE:




## LIGHT HEAD

Type	Finish 2 Light head outside ring	Finish 3 Light head top cover	LED	Beam Angle
01	12 white matt RAL 9003	60 silver anodised	Extra warm-white 2700 K	FLOOD 2 x 12,5 W   1282 <sup>1)</sup> Lumen
	62 (14) black matt	61 gold anodised	Warm-white 3000 K	SPOT 26° 12,5 W   1550 <sup>1)</sup> Lumen   UGR<19
	22 aluminium polished	62 black anodised	Neutral-white 4000 K	SPOT 34° 12,5 W   1550 <sup>1)</sup> Lumen
	Finish 2 must be the same as finish 1			

## LIGHT HEAD

Type No.	Finish 2	Finish 3	LED Kelvin	Beam angle		
XX.	12	XX.	XX.	XX.	XX.	XX.
XX.	62	XX.	XX.	XX.	XX.	XX.
XX.	22	XX.	XX.	XX.	XX.	XX.
XX.	XX.	60	XX.	XX.	XX.	XX.
XX.	XX.	61	XX.	XX.	XX.	XX.
XX.	XX.	62	XX.	XX.	XX.	XX.
XX.	XX.	XX.	27	XX.	XX.	XX.
XX.	XX.	XX.	30	XX.	XX.	XX.
XX.	XX.	XX.	40	XX.	XX.	XX.
XX.	XX.	XX.	XX.	99	00	00
XX.	XX.	XX.	XX.	26	00	00
XX.	XX.	XX.	XX.	34	00	00

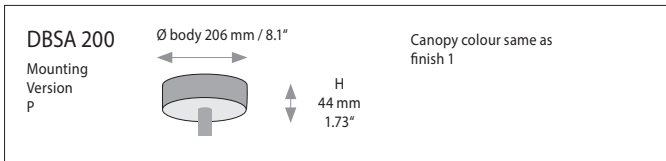

Input voltage for canopies is 100-277 VAC 50-60 Hz

Quantity  Order No. LIGHT HEAD

Quantity  Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure

Quantity  Order No. Accessories (page 2)



Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

## AVVENI

### ACCESSORIES

---

#### CASAMBI WALL SWITCH



CASAMBI wall-switch

white

207. 00. 00. 00. 11

CASAMBI wall-switch

black

207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.