


AVVENI PENDANT 1

Product-information: Aluminium housing. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees).
Design: Ulrich Sattler | Michael Schmidt, Code2design

www.sattler-lighting.com

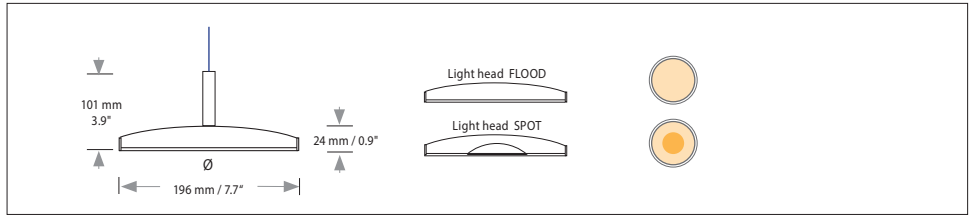


STRUCTURE

Type	Ø / H mm	Ø / H inches	LED Watt	weight kg ² / lbs ²	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	Ø 196 / 101 mm	Ø 7,7 / 0,9"	12,5 W	0,8 / 1,7	1211.	00.	xx.	xx.	xx.
Dimmer	DALI CASAMBI TRIAC*	Standard	*only in combination with mounting version F/R	xxxx.	xx.	06	xx.	xx.	
				xxxx.	xx.	08	xx.	xx.	
				xxxx.	xx.	11	xx.	xx.	
Power Supply Cable	Z 82, black 2000mm / 78.7"				xxxx.	xx.	xx.	82	xx.
Mounting Version	R Standard	F Suspension with canopy DB90 and 1 power supply cable 2000 mm / 78.7"	Z Mounting with adapter for 48V DALI PALADIO TRACK System, power supply cable 2000 mm / 78.7" *only DALI/CASAMBI dimmable		xxxx.	xx.	xx.	xx.	0x.
					Order No. STRUCTURE: 1211. 00. . . 82 0x.				

LIGHT HEAD

Type	Finish Light head outside ring	Finish Light head top cover and cable fixation	LED	Beam Angle	LIGHT HEAD						
					Type No.	Finish 2	Finish 3	LED Kelvin	Beam angle		
	62 (14) black matt	62 black anodised	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K	FLOOD 12,5 W 1282 ¹ Lumen SPOT 26° 12,5 W 1550 ¹ Lumen UGR<19 SPOT 34° 12,5 W 1550 ¹ Lumen	02.	xx.	xx.	xx.	xx.	xx.	xx.
					xx.	62	xx.	xx.	xx.	xx.	xx.
					xx.	xx.	62.	xx.	xx.	xx.	xx.
					xx.	xx.	xx.	27	xx.	xx.	xx.
					xx.	xx.	xx.	30	xx.	xx.	xx.
					xx.	xx.	xx.	40	xx.	xx.	xx.
					xx.	xx.	xx.	xx.	99	00	00
					xx.	xx.	xx.	xx.	26	00	00
					xx.	xx.	xx.	xx.	34	00	00

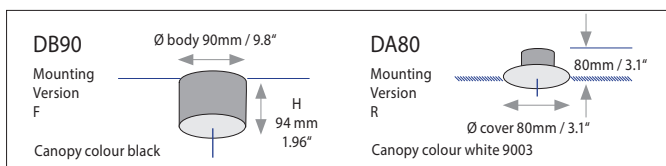

Quantity Order No. LIGHT HEAD FLOOD **02. . . 62. 00 00**

Quantity Order No. LIGHT HEAD SPOT **02. . . 62. 00 00**

Order No. Accessories (page 2) **. . . . 00 00 00 ..**

Input voltage for all external power supply units and canopies is 220-240 VAC 50-60 Hz



Handcrafted in Germany, certified quality

IP 20

Protective rating



Light distribution direct



Schutzklasse II Protection class II



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH



CASAMBI wall-switch

white

207. 00. 00. 00. 11

CASAMBI wall-switch

black

207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.