




# SATTLER

## AVVENI PENDANT 6



**Product-information:** Aluminium structure with six light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.

**Design:** Ulrich Sattler | Michael Schmidt, Code2design

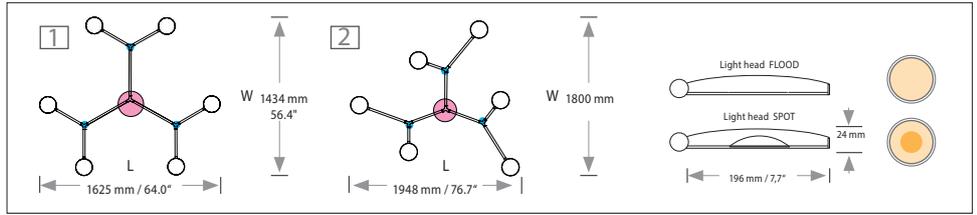

### STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
1	L 1625 / W 1434	L 64.0 / W 56.4"	75 W	5,1 / 11.2	1136.	XX.	XX.	XX.	XX.
2	L 1948 / W 1800	L 76.7 / W 71.0"	75 W	5,4 / 11.9	1137.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminium polished	Standard	XXXX.	12 14 22	XX.	XX.	XX.
Dimmer	0-10 V DALI CASAMBI			Standard	XXXX.	XX.	05 06 08	XX.	XX.
Cable	power supply cable, silver, mounting version (A/B) 5000mm without power supply cable, current-carrying suspension (F/R) 3000mm (T) (a) 5000 + (b) 3000mm			Standard	XXXX.	XX.	XX.	70 00	XX.
Mounting Version					XXXX.	XX.	XX.	XX.	0x.

### LIGHT HEAD

Type	LIGHT HEAD						
	Type No.	Finish 2	Finish 3	LED Kelvin	Beam angle		
Type	01	XX.	XX.	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black anodised	22 aluminium polished	Standard	XX.	12 62 22	XX. XX. XX.
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised	Standard	XX.	XX. 60 61 62	XX. XX. XX.
LED CRI >92		Extra warm-white 2700 K	Warm-white 3000 K	Neutral-white 4000 K	XX.	XX. XX. XX.	XX. XX. XX.
Beam Angle	FLOOD 6 x 12,5 W   1282 <sup>1</sup> Lumen	SPOT 26° 12,5 W   1550 <sup>1</sup> Lumen	SPOT 34° 12,5 W   1550 <sup>1</sup> Lumen	Standard	XX.	XX. XX. XX.	XX. XX. XX.

Quantity  Order No. LIGHT HEAD

Quantity  Order No. LIGHT HEAD

Flood and spot heads may be mixed within one structure

Quantity  Order No. Accessories (page 2)


Handcrafted in Germany, certified quality Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08 Protective rating Light distribution direct Protection class III: only suitable for very low voltage supply (<50V) Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.


## AVVENI PENDANT 6

Product-information: Aluminium structure with six light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 26 and 34 degrees). Cable suspensions are adjustable.  
Design: Ulrich Sattler | Michael Schmidt, Code2design

www.sattler-lighting.com

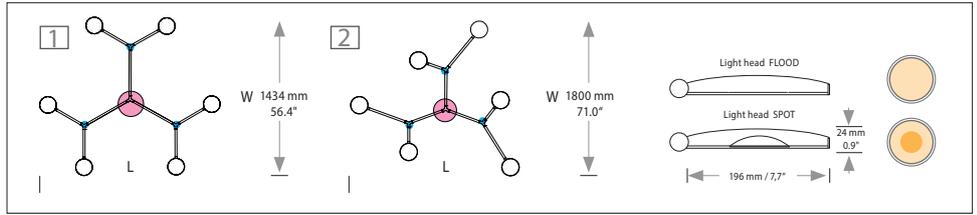

## MOUNTING VERSION

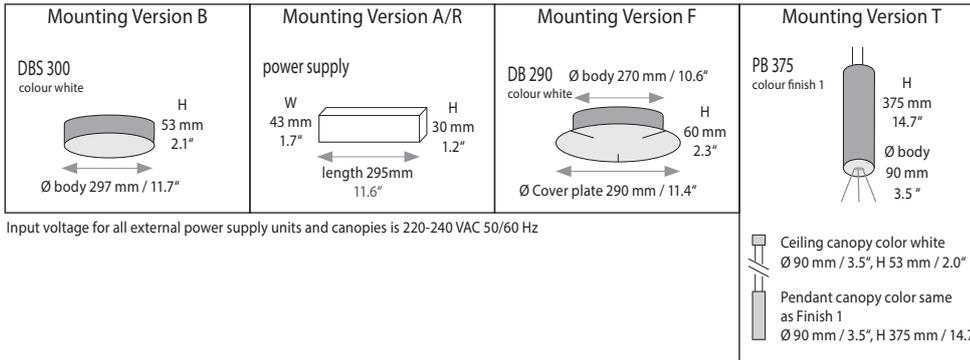

## ACCESSORIES

### CASAMBI WALL SWITCH




CASAMBI wall-switch  
CASAMBI wall-switch

white  
black

207. 00.00.00.11  
207. 00.00.00.10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

### Power cable cover plate



Consisting of a cavity ceiling box with 80mm round metal cover.  
Applicable to mounting version A/B.

white

200. 00.00.00.12