
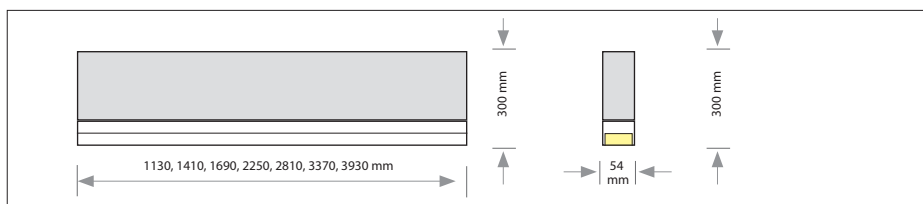


BAFFLE LIGHT PRISM

54

Housing: Acoustic baffle out of PET staple fibre with aluminium profile with integrated micropismatic diffuser and power supply.

Design: Prof. Alexander Reichel, SATTLER

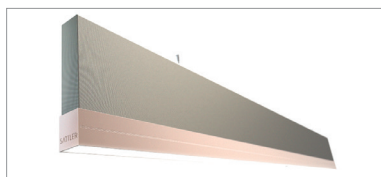

	L x Wx H mm	LED Watt	Lumen direct Microprismatic	Lumen / W	Weight ² /kg without baffle	Item. No.	Mounting	Colour	LED Direkt Light colour Diffuser	Acoustic element Baffle	Material	Dimming	Power supply cable					
BAFFLE	1130 x 54 x 300	23	2.440	107	2,4	2070.	X X.	X X.	X X.	X X.	X X X.	X X.	X X X.					
	1410	28	3.040	107	3,0	2071.	X X.	X X.	X X.	X X.	X X X.	X X.	X X X.					
	1690	34	3.650	107	6,9	2076.	X X.	X X.	X X.	X X.	X X X.	X X.	X X X.					
	2250	45	4.850	107	4,7	2072.	X X.	X X.	X X.	X X.	X X X.	X X.	X X X.					
	2810 - multi-part	57	6.060	107	5,9	2073.	X X.	X X.	X X.	X X.	X X X.	X X.	X X X.					
	3370 - multi-part	68	7.270	107	7,0	2074.	X X.	X X.	X X.	X X.	X X X.	X X.	X X X.					
	3930 - multi-part	79	8.480	107	8,3	2075.	X X.	X X.	X X.	X X.	X X X.	X X.	X X X.					
Mounting version	 Pendant					X X X X.	0A.	X X.	X X.	X X.	X X X.	X X.	X X X.					
Finish Aluminium Profile	 66 bronze anodized						 60 silver anodized	 62 black anodized	 65 champ. gold anodized	X X X X.	X X.	 -- --.	X X.	X X.	X X X.	X X.	X X X.	
LED direct	 CRI > 90, *CRI 80 MacAdam 3 L 90 B10 bei 72.000 h																	
SELV	DIFFUSER Standard: Microprism symmetrical, 65° beam angle					X X X X.	X X.	X X.	40.	X X.	X X.	X X X.	X X.	X X X.				
Baffle PET staple fibre Sound absorption class A aw: 0,95 Fire protection class B1/Cs3, d0																		
Standard:  P 05 white																		
Optional:  P 01 black																		
 P 02 bronze																		
 P 03 champ. gold																		
 P 04 silver																		
*Colours P01-P04 adapted to anodized aluminium finishes						X X X X.	X X.	X X.	X X.	X X.	02.	 -- --	X X.	X X X.				
Dimming	Standard: Dimmable to 1% via Dali-2, switch Dim					X X X X.	X X.	X X.	X X.	X X.	X X.	X X X.	06.	X X X.				
Power Supply Cable	 1500 mm steel cable suspension + 1800 mm PVC cable Z91 transparent 3000 mm steel cable suspension + 3300 mm PVC cable Z91 transparent					X X X X. X X X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	A15. A30.				

Accessoires see page 2

Quantity:

Order number:



---	0A.	--	--	10.	02.	---	06.	---
-----	-----	----	----	-----	-----	-----	-----	-----



Handcrafted in
Germany,
Certifizierte Qualität

230V

IP 20

Protective rating
of luminaire



Light distribution
direct



Protection class I



Luminaires are suitable for mounting
on ordinary flammable materials, which
have an inflammation point of at least
200° C / 392° F

BAFFLE LIGHT PRISM

54

Housing:


Acoustic baffle out of PET staple fibre
with aluminium profile with integrated microprismatic diffuser and power supply.

Design:

Prof. Alexander Reichel, SATTLER

Accessoires:

Connection box
Surface mounted connection
box + support of steel cable
suspension



L: 70 mm
B: 70 mm
H: 30 mm



12
white powder coated
RAL 9003



60
silver anodized



62
black
anodized



65
champ. gold
anodized



66
bronze
anodized

Item. No.

Quantity


2002.00.00.00.00. 12	_____
2002.00.00.00.00. 60	_____
2002.00.00.00.00. 62	_____
2002.00.00.00.00. 65	_____
2002.00.00.00.00. 66	_____

Illumination:

L x W x H mm

Item. No.

Direct side with microprism- full surface illumination



1130 x 54 x 300 mm

1410

1690

2250

2810

3370

3930

2070.

2071.


2076.

2072.

2073.

2074.

2075.

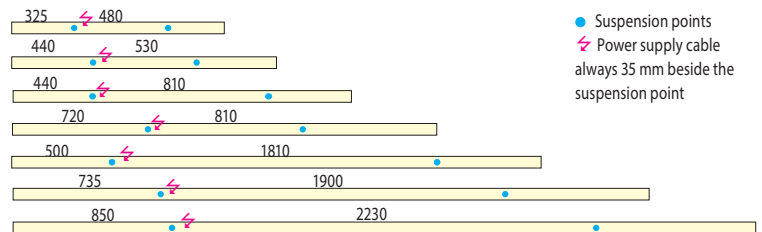

Input voltage 220 - 240 VAC 50/60 Hz, DC Level adjustable

Mounting versions:

OA Pendant luminaire

- Suspended with height adjustable steel cables (1500 mm)
- Power supply integrated in luminaire
- Position of suspension points can be repositioned on-site if necessary
- Connection box optional

