




CIRCOLO

I-Version

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER, Patented

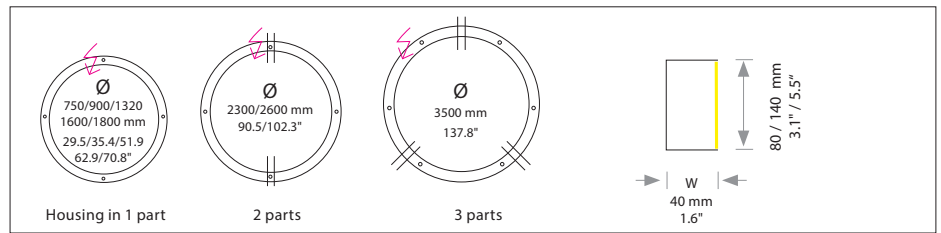


Size	Size: Ø x H x W mm / inches			LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Total height	Mounting version
Ø 750 / 29.5"	H 80 / 3.1"	W 40 / 1.6"	48	3.136	6 / 13.2	252.	XX.	XX.	XX.	XX.	XXX.	80	X	
Ø 900 / 35.5"	H 80 / 3.1"	W 40 / 1.6"	57	3.786	7 / 15.4	253.	XX.	XX.	XX.	XX.	XXX.	80	X	
Ø 1320 / 51.9"	H 80 / 3.1"	W 40 / 1.6"	83	5.724	12 / 26.5	254.	XX.	XX.	XX.	XX.	XXX.	80	X	
Ø 1600 / 62.9"	H 80 / 3.1"	W 40 / 1.6"	101	6.909	13,5 / 29.8	255.	XX.	XX.	XX.	XX.	XXX.	80	X	
Ø 1800 / 70.8"	H 80 / 3.1"	W 40 / 1.6"	114	7.780	19 / 41.8	256.	XX.	XX.	XX.	XX.	XXX.	80	X	
Ø 2300 / 90.5"	H 80 / 3.1"	W 40 / 1.6"	145	10.035	21 / 46.3	257.	XX.	XX.	XX.	XX.	XXX.	80	X	
Ø 2600 / 102.3"	H 80 / 3.1"	W 40 / 1.6"	164	11.117	28 / 62.0	258.	XX.	XX.	XX.	XX.	XXX.	80	X	
Ø 3500 / 137.8"	H 80 / 3.1"	W 40 / 1.6"	220	14.927	42 / 92.6	259.	XX.	XX.	XX.	XX.	XXX.	80	X	
From H 140 we recommend a second LED row														
Ø 1320 / 51.9"	H 140 / 5.5"	W 40 / 1.6"	83	6.282	20 / 44.0	1600.	XX.	XX.	XX.	XX.	XXX.	140	X	
Ø 1600 / 62.9"	H 140 / 5.5"	W 40 / 1.6"	101	7.702	25 / 55.1	1601.	XX.	XX.	XX.	XX.	XXX.	140	X	
Ø 1800 / 70.8"	H 140 / 5.5"	W 40 / 1.6"	114	8.699	30 / 66.0	1602.	XX.	XX.	XX.	XX.	XXX.	140	X	
Ø 2300 / 90.5"	H 140 / 5.5"	W 40 / 1.6"	145	11.327	35 / 77.2	1603.	XX.	XX.	XX.	XX.	XXX.	140	X	
Ø 2600 / 102.3"	H 140 / 5.5"	W 40 / 1.6"	164	12.451	40 / 88.0	1604.	XX.	XX.	XX.	XX.	XXX.	140	X	
Ø 3500 / 137.8"	H 140 / 5.5"	W 40 / 1.6"	220	16.849	53 / 117.0	1605.	XX.	XX.	XX.	XX.	XXX.	140	X	
LED														
CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h		Standard:	Neutral-white	4000 K	XXXX.	40.	XX.	XX.	XX.	XXX.	XXX.	X		
		Optional:	Warm-white	3000 K	XXXX.	30.	XX.	XX.	XX.	XXX.	XXX.	X		
		Extra warm-white	2700 K	XXXX.	27.	XX.	XX.	XX.	XXX.	XXX.	X			
		Tunable white*	2700 - 6500 K	XXXX.	80.	XX.	XX.	XX.	XXX.	XXX.	X			
		RGB colour control*		XXXX.	60.	XX.	00.	XX.	XXX.	XXX.	X			
	RGB + Neutral-White*	4000 K	XXXX.	60.	XX.	40.	XX.	XXX.	XXX.	X				
	* (only in combination with dimming DALI, CASAMBI) Combinations up to 2 stripes (H80) and 3 stripes (H140) of LED possible													
Dimming														
	Standard:	Without Dimmer	XXXX.	XX.	01.	00.	XX.	XXX.	XXX.	X				
	Optional:	0 - 10 V	XXXX.	XX.	51.	00.	XX.	XXX.	XXX.	X				
	DALI	XXXX.	XX.	61.	00.	XX.	XXX.	XXX.	X					
CASAMBI	XXXX.	XX.	81.	00.	XX.	XXX.	XXX.	X						



CIRCOLO

I-Version

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER, Patented

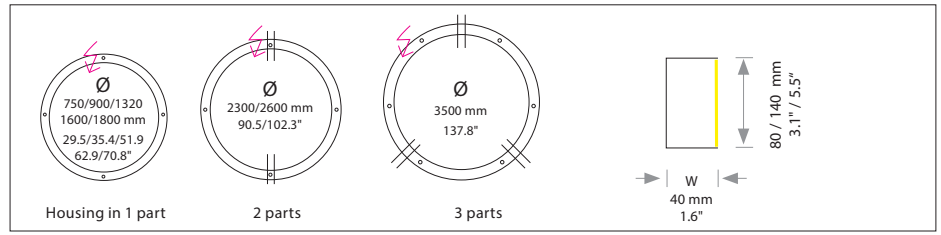

	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Total height	Mounting version
Finish Standard: 12 white, powder coated, similar RAL 9003 Optional (Powder coated): 11 white, similar RAL 9010 10 black fine textured 30 anthracite fine textured 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper Optional (Premium): 22 aluminium polished 27 brush-finished aluminium 44 wood veneer, white borders XX Custom finish	XXX.X.	XX.	XX.	XX.	XX.X.	XX.X.	XX.X.	X
Power supply cable Standard: Z 70 Silver Optional: Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green 000 Without power cable Current-carrying F, R, T, K	XXX.X.	XX.	XX.	XX.	XX.X.	XX.X.	XX.X.	X



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III: only suitable for very low voltage supply (<50V)





Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

CIRCOLO

I-Version

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER, Patented

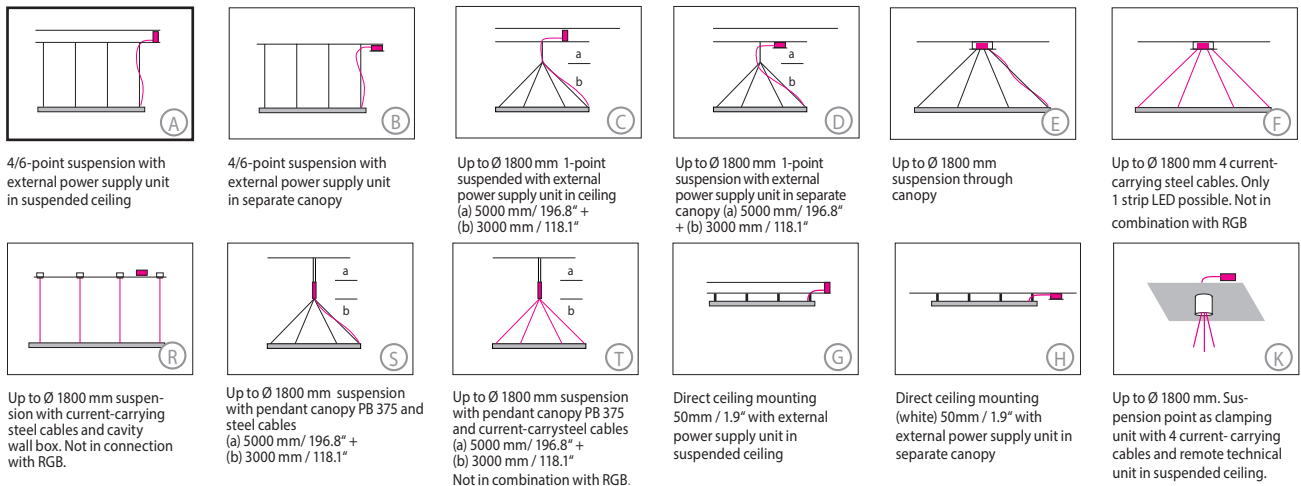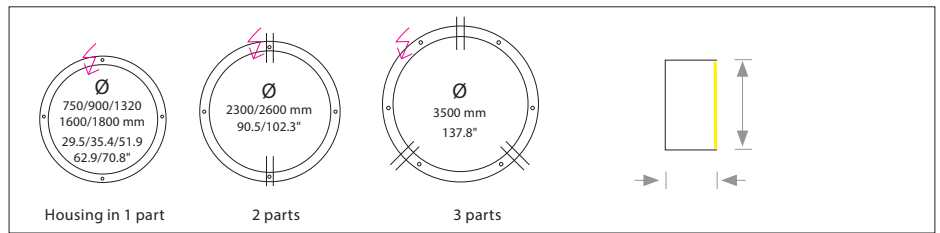

A, B, C, D, G, H, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118";
 Version C,D,S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Total height	Mounting Version
X X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	-

Power supply units:			
Type / Size mm / inch	For use with Mounting version	Protective rating	
DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,C,G,R,K (upto Ø1800mm)	IP 20	
DE 2F 363 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	A,G (upto Ø3500mm)	IP 20	

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:			
Type / Size mm / inch	For use with Mounting version	Protective rating	
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, D, E, F, H (upto Ø1800)	IP 20	
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, H (upto Ø3500)	IP 20	
PB 375 Ø 90 H 375 mm / 3.5 x 14.8"	S, T (upto Ø1320)	IP 20	
PB 652 Ø 90 H 652 mm / 3.5 x 25.7"	S, T (upto Ø1800)	IP 20	

Colour: 12 white, similar RAL 9003, contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.


Complete order number



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
 207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.