


SATTLER

DOPPIO DIRECT

Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER

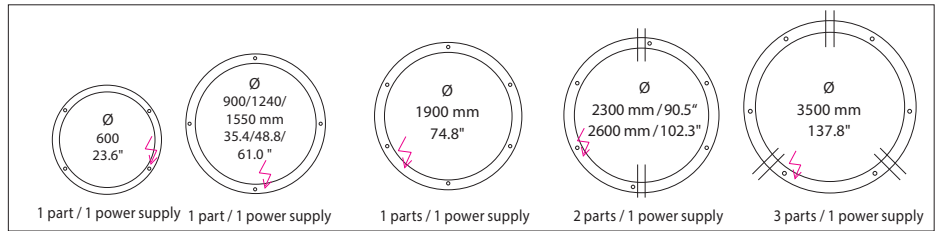


Sizes	Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 600 mm	23.6"	31	1.829	3,2 / 7.10	778.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 900 mm	35.4"	54	3.186	3,7 / 8.12	779.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 1240 mm	48.8"	70	4.130	4,8 / 10.6	780.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 1550 mm	61.0"	89	5.251	5,5 / 12.1	781.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 1900 mm	74.8"	107	6.313	9,0 / 19.8	782.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 2300 mm	90.5"	139	8.201	10,0 / 22.0	783.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 2600 mm	102.3"	160	9.440	14,0 / 30.9	784.	XX.	XX.	XX.	XX.	XXX.	X
	Ø 3500 mm	137.8"	192	11.328	16,0 / 35.3	785.	XX.	XX.	XX.	XX.	XXX.	X
LED CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h		Standard: Warm-white 3000 K	XXX. 30.	XX. XX.	XX. XX.	XX. XX.	XXX. XXX.	X				
	Optional: Neutral-white Extra warm-white 2700 K	XXX. XXX.	40. 27.	XX. XX.	XX. XX.	XX. XX.	XXX. XXX.	X X				
	Tunable white only up to Ø 1900 mm 2700 - 6500 K only in combination with dimming DALI, CASAMBI	XXX.	80.	XX.	XX.	XX.	XXX.	X				
Dimming		Standard: Without Dimmer	XXX.	XX.	01.	00.	XX.	XXX.	X			
	Optional: 0 - 10 V DALI CASAMBI	XXX. XXX. XXX.	51. 61. 81.	XX. XX. XX.	00. 00. 00.	XX. XX. XX.	XXX. XXX. XXX.	X X X				
Finish	Standard:		Optional (Powder coated):							XXX. XX. XX.	XXX. XXX. XXX.	X X X
	12 white, powder coated, similar RAL 9003	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined						
	35 gold	36 brass	37 bronze fine textured	38 copper								
Optional (Premium):					22 aluminium polished	27 brush-finished aluminium	* 22, 27 Ring aluminium polished or brush-finished Top cover black	XX Custom finish	XXX. XX. XX.	XXX. XXX. XXX.	X X X	
Power supply cable	Standard:		Optional:					XXX. XX. XX.	XXX. XX. XX.	XXX. XXX. XXX.	X X X	
	Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black								
	Z 74 orange	Z 75 red	Z 76 green	000 Current-carrying F, R, T, K								




DOPPIO DIRECT


Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER

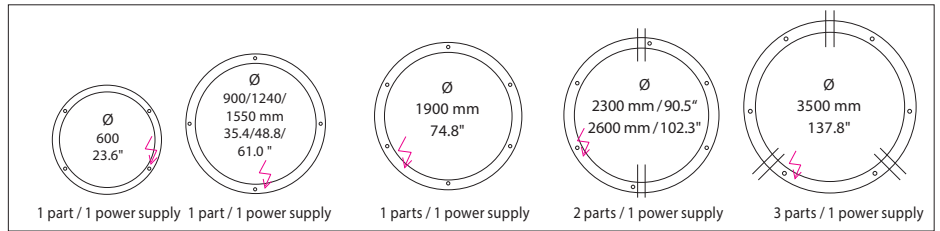


Mounting version




up to Ø 1550 mm / 61.0"
4-point suspension
up to Ø 3500 mm
6-point suspension
with external power supply
unit in suspended ceiling




up to Ø 1550 mm / 61.0"
4-point suspension
up to Ø 3500 mm
6-point suspension
with external power supply
unit in separate canopy




up to Ø 1900 mm / 74.8"
suspension through canopy




up to Ø 1550 mm / 61.0" 4,
up to Ø 1900 mm / 74.8" 6
current-carrying steel cables.
Not in combination with RGB




up to Ø 1900 mm / 74.8"
Suspension with current-
carrying steel cables and
cavity wall box. Not in
combination with RGB.




up to Ø 1900 mm / 74.8"
Suspension with pendant
canopy PB 652
and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"




up to Ø 1900 mm / 74.8"
Suspension with pendant canopy
PB 375 and current-carrying steel
cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



up to Ø 2600 mm / 102.3"
Direct ceiling mounting
(white) 50mm / 1.9" with
external power supply unit in
suspended ceiling



up to Ø 2600 mm / 102.3"
Direct ceiling mounting
(white) 50mm / 1.9" with
external power supply unit in
separate canopy



up to Ø 1900 mm / 74.8"
Suspension point as
clamping unit with 4/6 cables
and remote technical unit in
suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
x x x.	x x.	x x.	x x.	x x.	x x x	

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".

E, F, S, T, K = Minimum suspension height is half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension Version F,R 3000mm/118" version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply units:		Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
	DE 1F	363x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A,G,R,K (up to Ø 1900 mm)	IP 20
	DE 2F	363 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	A,G,R (up to Ø 3500 mm)	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:		Type/ Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
	DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F, H (up to Ø 900 mm)	IP 20
	DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (up to Ø 1550)	IP 20
	DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, F, H (up to Ø 3500 mm)	IP 20
	PB 375	Ø 90 H 375mm / 3.5 x 14.8"	S, T (up to Ø 1900)	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A..



Handcrafted in
Germany,
certified quality



Conforms to
UL-STD 1598
Certified to
CSA-STD C22.2
No.250.0-08



IP 50 Protective rating
of luminaire



Direct
light
distribution



Protection class III:
only suitable for very low
voltage supply (<50V)



Luminaires are suitable for mounting
on ordinary flammable materials,
which have an inflammation point of
at least 200° C. / 392° F.