

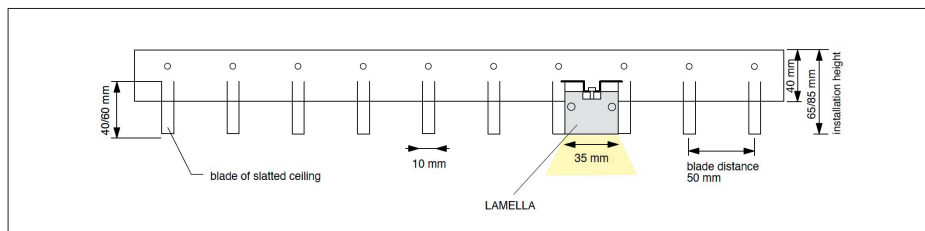


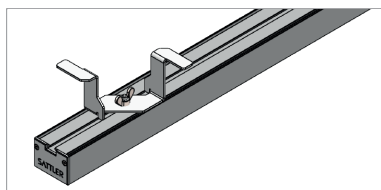


## PALADIO PRISM LAMELLA

Housing: Aluminium profile with integrated microprismatic diffuser and power supply  
Design: SATTLER



L x W x H mm	Wattage direct	Lumen	Lumen / W	Weight kg	Item No.	Mounting version	Colour	LED direct		LED indirect		Dimming	Power supply cable
855 x 35 x 60 1130 x 35 x 60	20 26	1780 2314	89 89	1,8 2,4	2571. 2572.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.
Mounting version	 VC recessed without frame with adjustable clamps				X X X X.	VC.	X X.	X X.	X X.	X X.	X X.	X X.	X X X.
Finish	 Standard 21 alu natur Optional  12 white, powder coated, similar RAL 9003				X X X X.	X X.	--.	X X.	X X.	X X.	X X.	X X.	X X X.
LED direct	 LED Standard: Neutral-white 4000 K Optional: Warm-white 3000 K CRI > 90   UGR<18 MacAdam 3   L 90   B10   72.000 h Efficiency 74% SELV				X X X X. X X X X.	X X. X X.	X X. X X.	40. 30.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.
	DIFFUSER Standard: Microprism symmetrical, 57° beam angle				X X X X.	X X.	X X.	X X.	10.	X X.	X X.	X X.	X X X.
LED indirect	LED Standard: No indirect light output				X X X X.	X X.	X X.	X X.	X X.	00.	00.	X X.	X X X.
Dimming	Dimmable to 1% via DALI-2, switch Dim				X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	06.	X X X.
Mounting kit mounting brackets (alu natur) and end caps (luminaire colour) included, without power supply cable, screws included	Mounting version VC Height 40 mm Height 60 mm				X X X X. X X X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	004. 006.

Pieces:



Complete order number:



---	VC.	--.	--.	10.	00.	00.	06.	---
-----	-----	-----	-----	-----	-----	-----	-----	-----



Handcrafted in Germany, certified quality

IP 20

Protective rating of luminaire



Protection class II



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

## PALADIO PRISM LAMELLA

Housing:  
Design:


Aluminium profile with integrated microprismatic diffuser and power supply  
SATTLER

### Technical information

L x W x H mm

Item No.  
Single luminaires

Direct side with microprism - full surface illumination



855 x 35 x 60 mm  
1130 x 35 x 60 mm

2571.  
2572.



illuminated area

Maximum series connection

	TYP B	TYP C
Connected quantity of 10A Breaker	37 pcs	59 pcs
Connected quantity of 16A Breaker	59 pcs	94 pcs
Connected quantity of 20A Breaker	74 pcs	118 pcs

DALI programming

The table on the right shows the amount of DALI addresses necessary per fixture

	direct light only
855 - 1130	1


End caps

End caps in luminaire colour pre-mounted with every single luminaire.

### Mounting version

#### VC - Recessed without frame

- recessed luminaire
- position of mounting brackets adjustable
- power supply unit attached on top of the luminaire
- mounting between blades of slatted ceiling

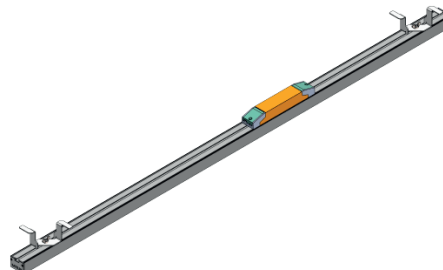


## PALADIO PRISM LAMELLA


Housing:  
Design:

Aluminium profile with integrated microprismatic diffuser and power supply  
SATTLER


### Technical drawing 855 x 35 x 60 mm

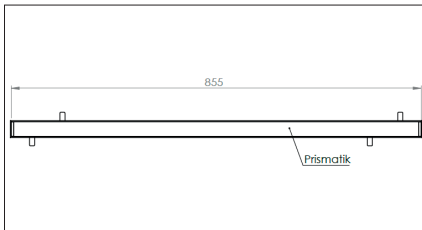

Bottom up

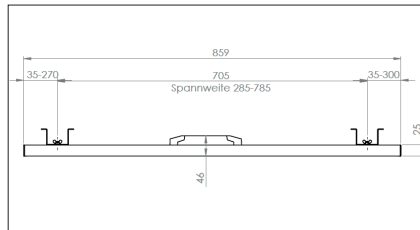


Side

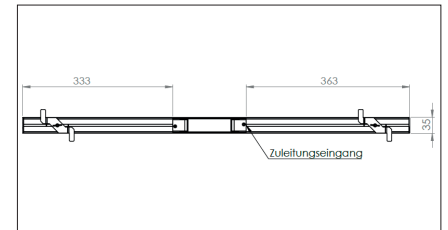


Top Down


### Technical drawing 1130 x 35 x 60 mm

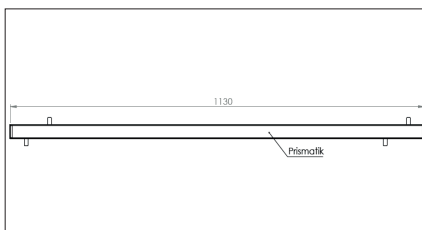

Bottom up

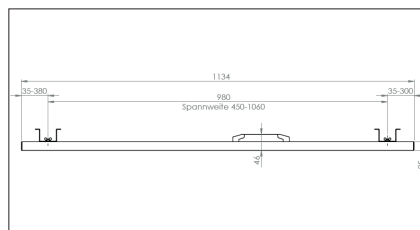


Side

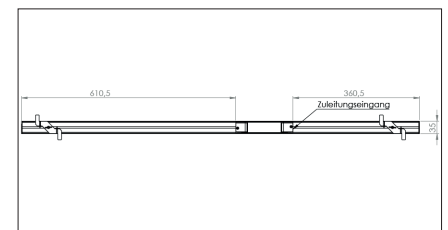

Top Down

### Compatibility with slat systems (e.g. Haufe | Pagolux)

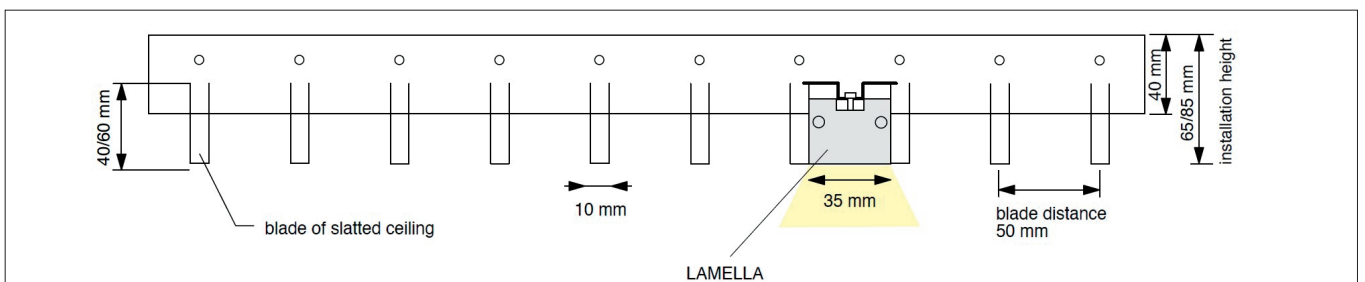

Handcrafted in  
Germany,  
certified quality

IP 20

Protective rating  
of luminaire



Light  
distribution  
direct



Protection class II



Luminaires are suitable for mounting  
on ordinary flammable materials,  
which have an inflammation point of  
at least 200° C. / 392° F.