



SLIM DELTA DIRECT

Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER

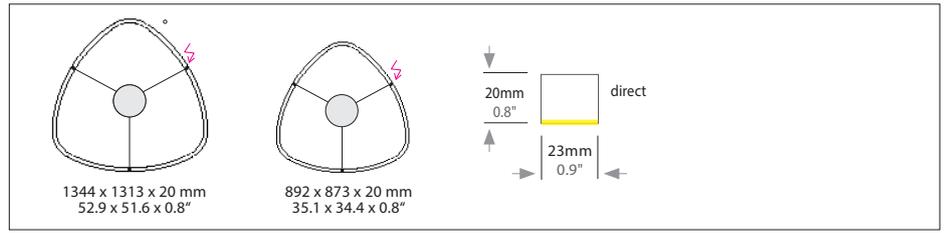


	Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
Sizes	1344 x 1313 x 20	52.9 x 51.6 x 0.8"	75	4.425	5.5 / 12.1	1575.	X X.	X X.	X X.	X X.	X X X.	X	
	892 x 873 x 20	35.1 x 34.4 x 0.8"	50	2.950	2.8 / 6.1	1577.	X X.	X X.	X X.	X X.	X X X.	X	
LED	 CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h	Standard:	Warm-white	3000 K		X X X X.	30.	X X.	X X.	X X.	X X X.	X	
		Optional:	Neutral-white	4000 K		X X X X.	40.	X X.	X X.	X X.	X X X.	X	
		Extra warm-white	2700 K		X X X X.	27.	X X.	X X.	X X.	X X X.	X		
		Tunable white*	2700 - 6500 K		X X X X.	80.	X X.	X X.	X X.	X X X.	X		
*only in combination with Dali and Casambi dimming													
Dimming		Standard:	Without Dimmer			X X X X.	X X.	01.	00.	X X.	X X X.	X	
		Optional:	0 - 10 V			X X X X.	X X.	51.	00.	X X.	X X X.	X	
		DALI			X X X X.	X X.	61.	00.	X X.	X X X.	X		
CASAMBI			X X X X.	X X.	81.	00.	X X.	X X X.	X				
Finish	Standard: 12 white, powder coated, similar RAL 9003 Optional (Powder coated): Optional (Premium):	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined							
		35 gold	36 brass	37 bronze fine textured	38 copper								
		22 aluminium polished	27 brush-finished aluminium										
		XX Custom finish											
Power supply cable	Standard: 000 Without power cable Optional:	Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black								
		Z 74 orange	Z 75 red	Z 76 green									




SLIM DELTA DIRECT


Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER

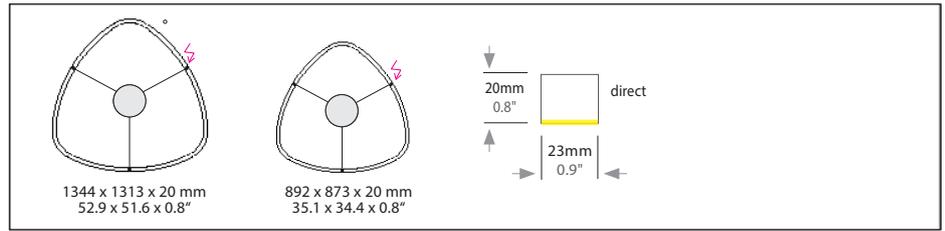

Mounting version

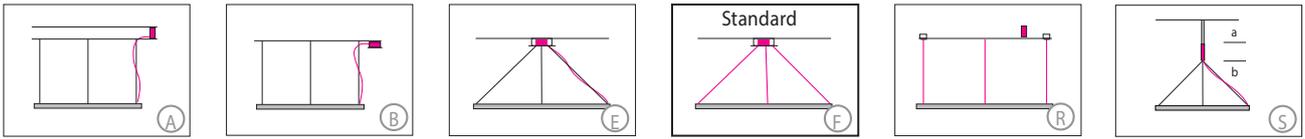

A 3-point suspension with external power supply unit in suspended ceiling
B 3-point suspension with external power supply unit in separate canopy
E suspension through canopy
F Standard 3 current-carrying steel cables.
R Suspension with current-carrying steel cables and cavity wall box.
S Suspension with pendant canopy PB 375 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"

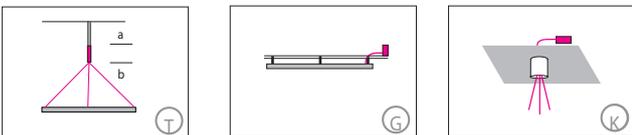

T Suspension with pendant canopy PB 375 and current-carrying steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"
G Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling
K Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394"
S, T, K, E, F = Minimum suspension height 670 mm, 450 mm / 26.3", 17.7"

Including steel cable suspension Version F,R 3000mm/118" version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X X.	X X.	X X.	X X.	X X.	X X X	<input type="checkbox"/>

Complete order number

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Power supply unit:

Type / Size mm / inch	For use with Mounting version	Protective rating
DE 1F 363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A, G, R, K	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:

Type / Size mm / inch	For use with Mounting version	Protective rating
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F (up to Ø 1550 mm)	IP 20
PB 375 Ø 90 H 375 mm / 3.5 x 14.8"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Power cable cover plate for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A, G.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 50 Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.