





SPILLA

Housing: Manufactured with fine porcelain of the Porzellan Manufaktur Nymphenburg and designed by Joerg Krewinkel, SPILLA allows for particularly artful plays with light.

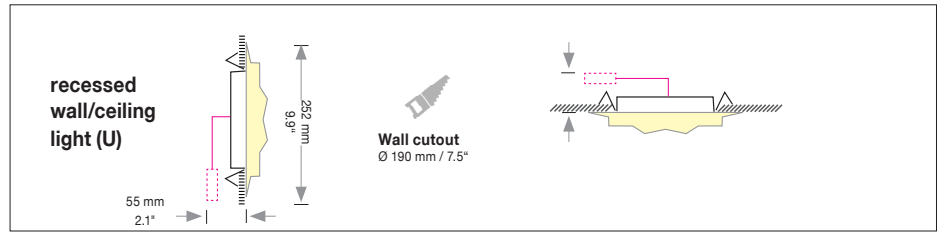


Design: Joerg Krewinkel

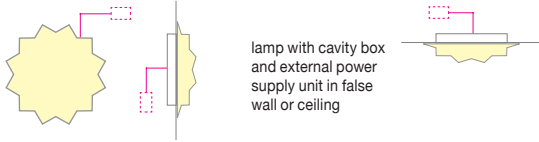

| SIZE | Size ∅ | inches | LED Watt | weight kg ²⁾ / lbs ²⁾ | STRUCTURE | | | | |
|---------------------------|--|--------|------------------------------------|---|---------------------------|-----------|-----------|--------------------|------------------|
| | | | | | Type No. | Finish 1 | DIM. | Power Supply Cable | Mounting Version |
| | Ø 252 mm | 9.9" | 12 W | 0.8 / 1.8 | 1570. | xx. | xx. | xx. | xx. |
| Finish 1 |  12 white matt RAL 9003 | | | | xxxx. | 12 | xx. | xx. | xx. |
| Dimmer |  0 -10 V 1 -10 V DALI *CASAMBI | | Standard Standard | | xxxx. | xx. | 05 | xx. | xx. |
| | | | | | xxxx. | xx. | 04 | xx. | xx. |
| | | | | | xxxx. | xx. | 06 | xx. | xx. |
| | | | | | xxxx. | xx. | 08 | xx. | xx. |
| Power Supply Cable | without visible power supply cable | | | | xxxx. | xx. | xx. | 00 | xx. |
| Mounting Version |  | | | | xxxx. | xx. | xx. | xx. | 0U |
| | | | | | 1570. 12 . . 00 0U | | | | |

Order No. STRUCTURE

LIGHT HEAD

| Type | Finish 2 | Finish 3 | LED | | Kelvin | Beam angle | | |
|-------------------|--|----------|-----------|-----------|-----------|------------|-----------|-----------|
| | | | | | | | | |
| Type | | | 05 | xx. | xx. | xx. | xx. | xx. |
| Finish 2 |  56 white biscuit porcelain | | xx. | 56 | xx. | xx. | xx. | xx. |
| | In Zusammenarbeit mit / In cooperation with: PORZELLAN MANUFABRIK NYPHENBURG, München  | | | | | | | |
| Finish 3 | | | xx. | xx. | 00 | xx. | xx. | xx. |
| LED |  36V | | xx. | xx. | xx. | 40 | xx. | xx. |
| | Colour temperature is influenced by porcelain, there is no choice of the colour temperature | | | | | | | |
| Beam Angle | FLOOD | | xx. | xx. | xx. | xx. | 98 | 00 |

Power Supplies

for connection of one or multiple lamps

Power supply not included, has to be order separately.

Power supply 1 light
Power supply unit up to 7 lights
Power supply unit up to 14 lights

Type No.

306.00.00.00.00
307.00.00.00.00
308.00.00.00.00

Order No. LIGHT HEAD

05 56 00 40 98 00 00

Order No. Power supplies

. . . . 00 00 00 00

Input voltage for all external power supply units and canopies is 90-277 VAC 47-63 Hz



Handcrafted in Germany, certified quality



Protective rating



Light distribution direct



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F.
2) Weight of lights without remote technical unit or canopy.