


Design: MARKUS BISCHOF




TOCCATA

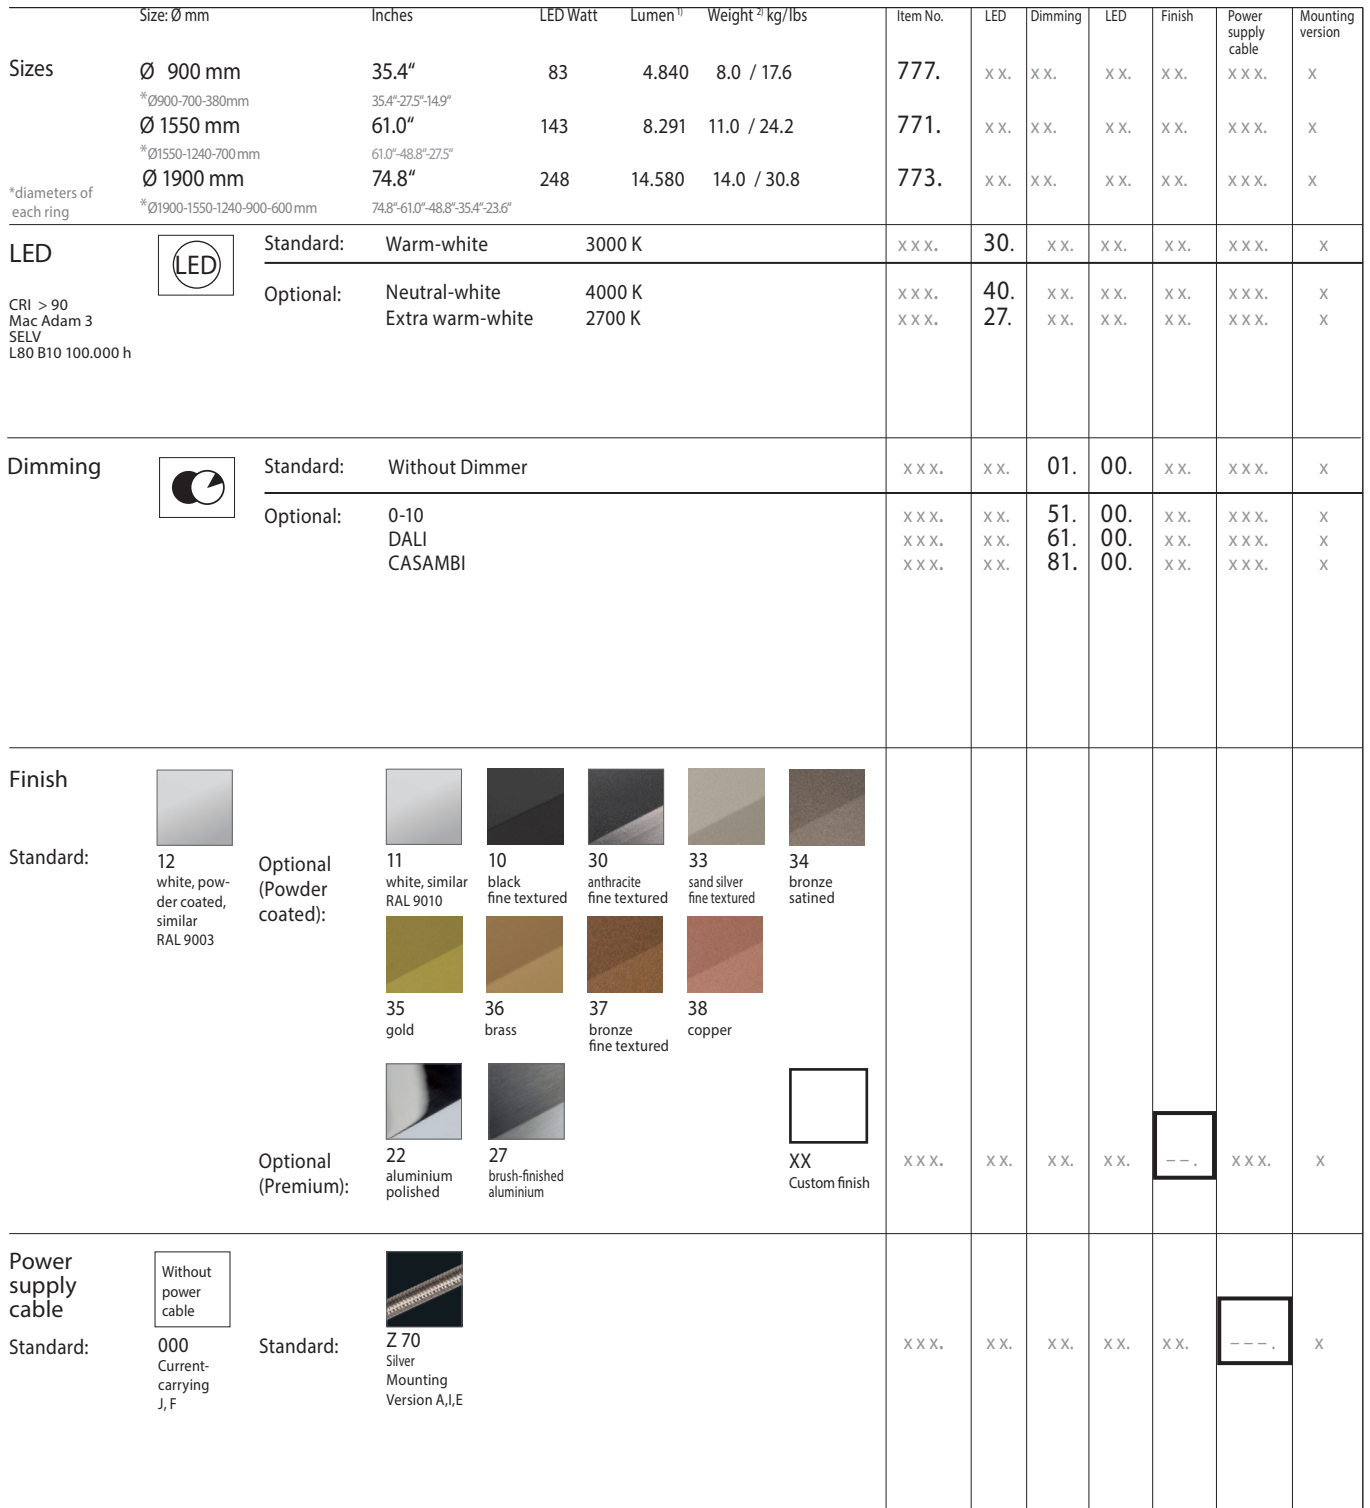


Housing: Pendant light with direct light distribution, 3/ 5 parts aluminium profile, with integrated opal diffuser.

Design: MARKUS BISCHOF

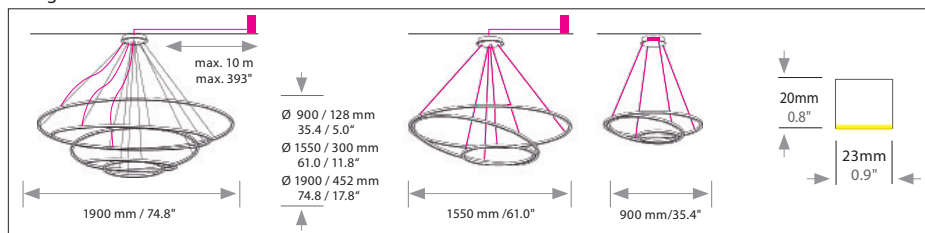


Mounting versions


Standard:



Ø 900 mm / 35.4"
current-carrying steel
cables, with power supply
in canopy




Ø 1900 mm / 74.8"
14 suspensions through
canopy and 3 power supply
cables with external power
supply unit in suspended
ceiling




Ø 1550 mm / 61.0"
6 current-carrying steel cables
with external power supply unit in
suspended ceiling.
Optional J Ø 1900 mm
14 current-carrying steel cables

Optional:



4/6/14-point suspension
with external power supply
unit in suspended ceiling



Ø 900 mm / 35.4"
suspensions through
canopy with external power
supply unit in canopy

I / J = Distance of external power supply unit to light fixture max. 10m / 394".

F, E = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

Mounting version with steel cable length 3 m / 118" and power supply cable,
length 2/3 x 5 m / 2/3 x 197" (1550, 1900)

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	- .

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply units:			
	Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A (Ø 900 mm)	IP 20
DE 2F	363 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	I, J, A (Ø 1550 mm)	IP 20
DE 3F	363 x 403 x 85 mm / 14.2 x 15.7 x 3.3"	I, J, A (Ø 1900 mm)	IP 20

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Canopy:			
	Type/ Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	F, E (Ø 900)	IP 20
Colour: 12 white, similar RAL 9003, contact factory for other finishes			
DB 230S	Ø 230 / 210 / 60 mm / 9.0 x 8.3 / 2.3"	I, J (Ø 1550, 1900 mm)	IP 20
DB 510S	Ø 510 / 470 / 60 mm / 20.1 x 18.5 / 2.3"	F, E (Ø 1550, 1900)	IP 20
Colour: Base finish white (12), Cover white (12), contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Optional:




CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)



Power cable cover plate for mounting version A

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.

200. 00. 00. 00. 12 (white)



Handcrafted in
Germany,
certified quality



Conforms to
UL-STD 1598
Certified to
CSA-STD C22.2
No.250.0-08



Protective rating
of luminaire



Direct
light
distribution



Protection class III:
only suitable for very low
voltage supply (<50V)



Luminaires are suitable for mounting
on ordinary flammable materials,
which have an inflammation point of
at least 200° C. / 392° F.