








Housing: Aluminium profile with integrated opal diffuser
Design: JÜRGEN BECKERT



	Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 380 mm Ø 600 mm	14.9" 23.6"	22 32	1.269 2.192	2.5 / 5.5 3.0 / 6.6	582. 583.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	X X
LED		Standard:	Warm-white	3000 K		X X X.	30.	X X.	X X.	X X.	X X X.	X
		Optional:	Neutral-white Extra warm-white	4000 K 2700 K		X X X. X X X.	40. 27.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	X X
CRI > 90 Mac Adam 3 SELV L80 B10 100.000 h												
Dimming		Standard:	Without Dimmer			X X X.	X X.	01.	00.	X X.	X X X.	X
		Optional:	0 - 10 V DALI CASAMBI			X X X. X X X. X X X.	X X. X X. X X.	51. 61. 81.	00. 00. 00.	X X. X X. X X.	X X X. X X X. X X X.	X X X
Finish		Standard:	12 white, powder coated, similar RAL 9003	Optional (Powder coated):	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined			
					35 gold	36 brass	37 bronze fine textured	38 copper				
		Optional (Premium):	22 aluminium polished							XX Custom finish		
Power supply cable		Standard:	Without power cable	Mounting version	Mounting version with 3 current-carrying steel cables length 3000mm							
			000 Current-carrying F			X X X.	X X.	X X.	X X.	X X.	000.	F
<div><div><div><div>Ø body</div><div>H</div><div>Ø cover plate</div></div><div><div>Canopy:</div><div>Type/Size mm / inch Ø cover plate / body / H</div><div>DB 140 Ø 140 / 133 / 68 mm / 5.5 / 5.2 / 2,7"</div><div>For use with Mounting version</div><div>F</div><div>Protective rating</div><div>IP 20</div><div>Same colour as luminaire (12,11,10,30,33,34,35,36,37,38), white (22 polished)</div><div>USA/Canada: Canopy mounts to 4" octagonal junction box.</div></div></div></div>												
Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz												
Optional		CASAMBI wall-switch					207. 00. 00. 00. 12. (white) 207. 00. 00. 00. 10 (black)					
Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.												
<div><div>Complete order number</div><div><div></div><div></div><div></div><div></div><div></div><div></div><div>000.</div><div>F</div></div></div>												

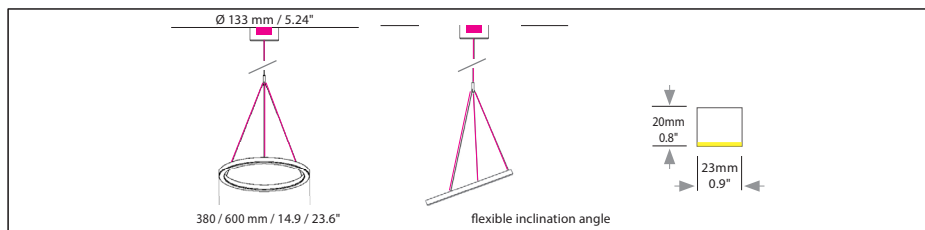

Handcrafted in Germany, certified quality



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.