
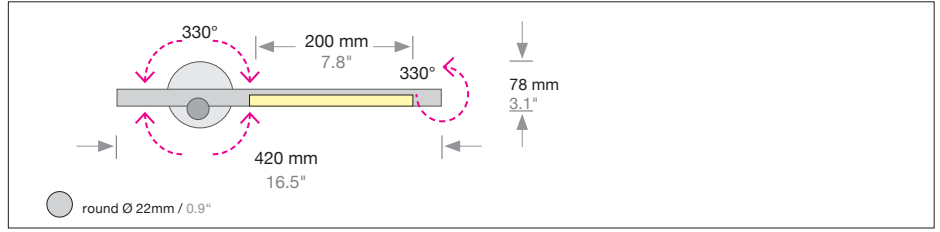


SATTLER


PALITO WALL

Housing: Aluminium profile with integrated mini lens system, movable body
 Design: Michael Schmidt, code2design

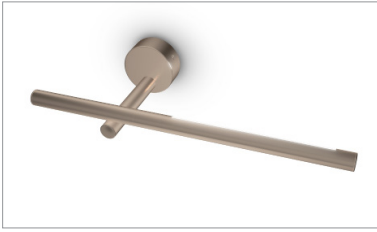

Size	Size: Ø x L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version				
	Ø 22 x 420	0.9 x 16.5"	6,5	650	0,8	1544.	x x.	x x.	x x.	x x.	x x x.	x				
LED		Standard: Warm-white Optional: Neutral-white Extra warm-white	3000 K 4000 K 2700 K	x x x x. x x x x. x x x x.	30. 40. 27.	x x. x x. x x.	00. 00. 00.	x x. x x. x x.	x x x. x x x. x x x.	x x x						
Dimming		Standard: TRIAC		x x x x.	11.	x x.	x x.	x x.	x x x.	x						
Finish		Standard: 66 bronze anodised brushed Optional: 60 silver anodised brushed, 62 black anodised brushed, 65 champ. gold anodised brushed		x x x.	x x.	x x.	x x.	. .	x x x.	x						

Mounting version



Standard:

Direct wall mounting with power supply unit in canopy

1544. -- **11.** **00.** -- **000.** **P**
 Complete order number

Compatible TRIAC Dimmers

Manufacturer	Model	Quantity of parallel connection
JUNG	1224 LED UDE	14
JUNG	1731 DD	10
Merten	SBD200LED	13
ABB Busch-Jaeger	6519 U	15
ABB Busch-Jaeger	6526 U	13
Berker	296110	10
Berker	2973	12
Schneider	SBD200LED ELG174231	13

Canopy:

Type: **DB 78/32** For use with Mounting version: **P** Protective rating: **IP 40**

Cover Ø 78 mm / 3.1"
 H 32 mm / 1.3"
 Same colour as luminaire

Input voltage for canopy is **220-240 VAC 50/60 Hz**

