


Housing: Circular aluminium profile with integrated opal diffuser on the downside
 Design: SATTLER

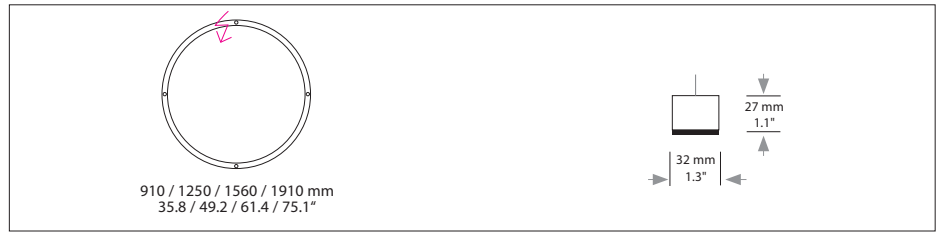

	Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Sizes	Ø 910 mm	35.8"	51	3.259	3,8 / 8.4	1000.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1250 mm	49.2"	66	4.227	5,2 / 11.5	1001.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1560 mm	61.4"	85	5.537	6,5 / 14.3	1011.	X X.	X X.	X X.	X X.	X X X.	X
	Ø 1910 mm	75.1"	102	6.114	8,0 / 17.6	1012.	X X.	X X.	X X.	X X.	X X X.	X

LED 24V CRI > 90 Mac Adam 3 L80 B10 50.000 h		Standard: Neutral-white	4000 K	X X X X.	40.	X X.	X X.	X X.	X X.	X X X.	X
		Optional: Warm-white Extra warm-white	3000 K 2700 K	X X X X. X X X X.	30. 27.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	X X

Dimming		Standard: 0-10 V		X X X X.	X X.	51.	00.	X X.	X X X.	X
		Optional: DALI CASAMBI		X X X X. X X X X.	X X. X X.	61. 81.	00. 00.	X X. X X.	X X X. X X X.	X X

Finishes		Standard: 11 white, similar RAL 9010		Optional: 30 anthracite fine textured		12 white, similar RAL 9003	X X X X.	X X.	X X.	X X.	---	X X X.	X
----------	--	--	--	---	--	----------------------------------	----------	------	------	------	------------	--------	---

Power supply cable		Z 80 Black matt	X X X X.	X X.	X X.	X X.	X X.	X X.	Z80.	X
--------------------	--	--------------------	----------	------	------	------	------	------	------	---

Mounting version	Standard:		4 point suspension with canopy in suspended ceiling	X X X X.	X X.	X X.	X X.	X X.	X X X.	A.
------------------	-----------	--	---	----------	------	------	------	------	--------	----

Optional:		4 point suspension with canopy		Direct ceiling mounting (white) 18mm / 0.7" with canopy	X X X X. X X X X.	X X. X X.	X X. X X.	X X. X X.	X X. X X.	X X X. X X X.	B. G.
-----------	--	--------------------------------	--	--	----------------------	--------------	--------------	--------------	--------------	------------------	----------

Dimensions of canopy

Typ	Size mm / inch body / H	included with mounting version	Protective rating
DBS 250	Ø 250 / 50 mm / 9.8 / 1.9"	A, B, G	IP 30
DBS 300*	Ø 297 / 53 mm / 11.7 / 2.1"	A, B, G	IP 30

*Ø1900 mm

USA/Canada: Canopy mounts to 4" octagonal junction box.

---	---	---	---	---	Z80.	-.
-----	-----	-----	-----	-----	------	----

Order number

Distance of external power supply unit to light fixture max. 10m / 394".
 Mounting version with steel cable length 5000 mm / 196" and power supply cable, length 5000 mm / 196"

Input voltage for all external power supply units and canopy is 220-240 VAC 50-60 Hz

Optional		CASAMBI wall-switch	207. 00. 00. 00. 12 (white) 207. 00. 00. 00. 10 (black)
----------	--	---------------------	--

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lamps together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Handcrafted in Germany, certified quality	Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08	Protective rating luminaire	Direct light distribution	Protection class III: only suitable for very low voltage supply (<50V)	Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.
---	--	-----------------------------	---------------------------	--	--