



## PALADIO CONNECT 35



**PRISM  
LENS  
TRACK**

Housing: Aluminium profile with blind cover (or optionally with integrated microprismatic diffuser and power supply)  
Design: SATTLER

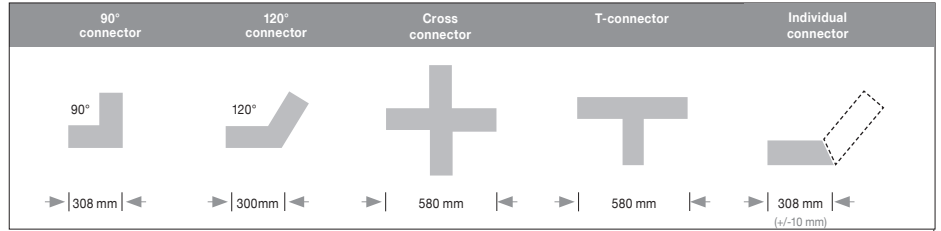


**PALADIO CONNECT** elements are connectors for the PALADIO PRISM, LENS and TRACK system luminaire series. They make it possible to create complex structures within the respective series or between PRISM, LENS and TRACK series. Connectors for PALADIO LENS and TRACK system are always directly and indirectly applied with blind covers. PALADIO PRISM connectors are functional and contain their own 230V power supply. All connectors can, however, only be operated with a complete system.

	L x W x H mm	Wattage direct	Lumen	Weight <sup>2)</sup> kg	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable	
<b>Connectors</b>	<b>90° connector</b>	<b>308 x 308 x 70</b>	10	1.040	<b>2240.</b>	X X.	X X.	X X.	X X.	X X.	X X.	X X X.
	<b>120° connector</b>	<b>300 x 300 x 70</b>	10	1.040	<b>2241.</b>	X X.	X X.	X X.	X X.	X X.	X X.	X X X.
	<b>Cross connector</b>	<b>580 x 580 x 70</b>	20	2.080	<b>2242.</b>	X X.	X X.	X X.	X X.	X X.	X X.	X X X.
	<b>T-connector</b>	<b>580 x 308 x 70</b>	15	1.560	<b>2243.</b>	X X.	X X.	X X.	X X.	X X.	X X.	X X X.
	<b>Individual connector</b>	<b>308 x 308 x 70</b> (+/- 10 mm)	10	1.040	<b>2244.</b>	X X.	X X.	X X.	X X.	X X.	X X.	X X X.

CONNECT elements for PALADIO system luminaires cannot be operated separately. There is always the necessity for a connection to a system luminaire of the PALADIO series PRISM, LENS or TRACK.

### Mounting version



X X X X.  X X. X X. X X. X X. X X. X X. X X. X X X.

### Finish

#### Standard



**66**  
bronze  
anodised

Optional



**60**  
silver  
anodised



**62**  
black  
anodised



**65**  
champ. gold  
anodised

X X X X. X X.  X X. X X. X X. X X. X X. X X. X X X.

### LED direct



#### LED

**Standard:** PALADIO LENS, TRACK, PRISM:  
Blind cover

X X X X. X X. X X. **00.** **00.** **00.** **00.** X X. X X X.

**Optional:** PALADIO PRISM:

Neutral-white 4000 K  
Warm-white 3000 K

X X X X. X X. X X. **40.** X X. X X. X X. X X. X X X.  
X X X X. X X. X X. **30.** X X. X X. X X. X X. X X X.

#### DIFFUSER

PALADIO PRISM:  
Microprism symmetrical, 65° beam angle

X X X X. X X. X X. X X. **10.** **00.** **00.** X X. X X X.

The indirect side is always covered with blind covers

### Dimming

**Standard:** Dimmable to 1% via DALI-2, switch Dim

X X X X. X X. X X. X X. X X. X X. X X. **06.** X X X.

### Power supply cable

No power supply cable necessary, wiring with system luminaire through 220-240VAC/DALI connecting clamp.

X X X X. X X. X X. X X. X X. X X. X X. **000.**


Pieces:

Complete order number:



----	--.	--.	--.	--.	<b>00.</b>	<b>00.</b>	<b>06.</b>	<b>000.</b>
------	-----	-----	-----	-----	------------	------------	------------	-------------


Input voltage 220-240 VAC 50/60 Hz



## PALADIO SYSTEM

### ORDER EXAMPLE

The diverse components of the PALADIO series give you the possibility to create your individually designed PALADIO SYSTEM LUMINAIRE. The illustration below shows only one of the various possibilities offered by the PALADIO System.

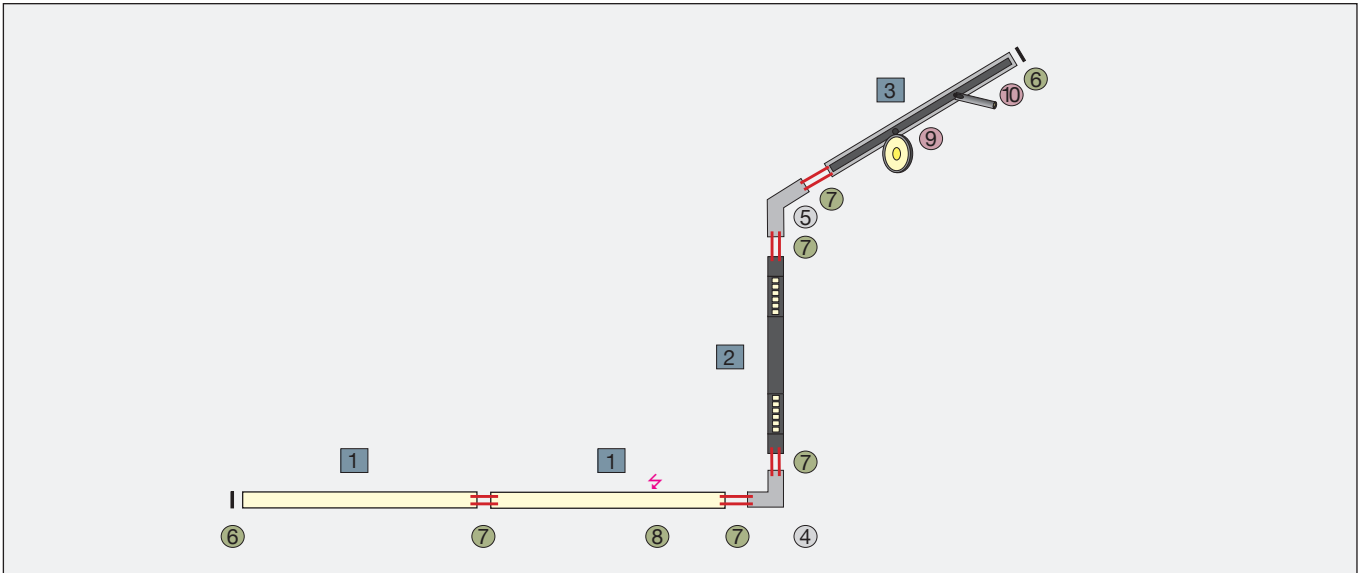

Luminaires	Connectors	Accessories	Light elements (TRACK)
<ul style="list-style-type: none"> <li>1 PRISM 1130 mm</li> <li>2 LENS 1410 mm</li> <li>3 TRACK 1410 mm</li> </ul>	<ul style="list-style-type: none"> <li>4 90° connector</li> <li>5 120° connector</li> </ul>	<ul style="list-style-type: none"> <li>6 End caps</li> <li>7 Connector Set</li> <li>8 Power supply cable</li> </ul>	<ul style="list-style-type: none"> <li>9 AVVENI SPOT</li> <li>10 FINO SPOT 2</li> </ul>