












PALADIO TRACK 35

Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
 Design: SATTLER

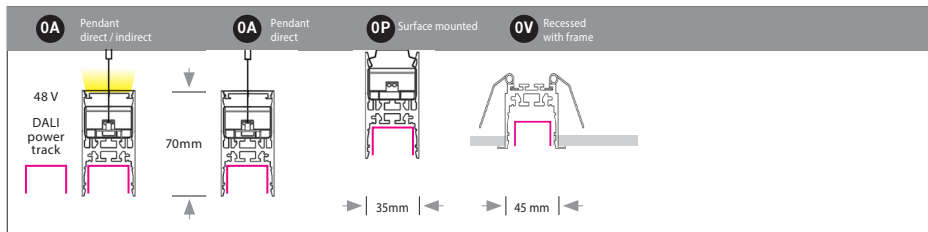

L x W x H mm	Wattage direct / indirect	Lumen direct / indirect	Lumen / W direct / indirect	Weight kg	Item No.	Mounting version	Colour	LED direct	LED indirect	Dimming	Power supply cable			
System luminaire  End caps, connectors, power supply cables and PALADIO CONNECT elements to be ordered separately, see page 2	1130 x 35 x 70	100W/ 48V / -	- / -	- / -	3,4	2260.	X X.	X X.	00. 01.	00. 00.	X X.	X X X.		
	1410	100W/ 48V / -	- / -	- / -	4,0	2261.	X X.	X X.	X X.	X X.	X X.	X X X.		
	2250	100 W 48V / 20	- / 1.920	- / 98	5,7	2262.	X X.	X X.	X X.	X X.	X X.	X X X.		
	2810	100 W 48V / 20	- / 1.920	- / 98	6,9	2263.	X X.	X X.	X X.	X X.	X X.	X X X.		
	3370	100 W 48V / 30	- / 2.880	- / 98	8,0	2264.	X X.	X X.	X X.	X X.	X X.	X X X.		
3930	100 W 48V / 40	- / 3.840	- / 98	9,3	2265.	X X.	X X.	X X.	X X.	X X.	X X X.			
<div style="border: 1px solid red; padding: 5px; display: inline-block; color: red;">Separate specification sheet for single luminaires</div>														
Mounting version	 Pendant	 Surface mounted	 Recessed with frame			X X X X.	--.	X X.	X X.	X X.	X X.	X X.	X X X.	
Finish	 66 bronze anodised	Optional	 60 silver anodised	 62 black anodised	 65 champ. gold anodised	X X X X.	X X.	--.	X X.	X X.	X X.	X X.	X X.	X X X.
Direct side		Paladio Track - power track 48 V DALI A magnetic adapter allows flexible positioning of versatile light elements. Each light element can be addressed individually through DALI. For light elements see page 4. Colour of power track: black				X X X X.	X X.	X X.	00. 01.	X X.	X X.	X X.	X X X.	
LED indirect		LED Standard: No indirect light output Optional: Neutral-white 4000 K Warm-white 3000 K Tunable white 2700 - 6500 K DIFFUSER Standard: Opal diffuser				X X X X.	X X.	X X.	X X.	X X.	00. 00.	X X.	X X X.	
Only available for mounting version 0A. Indirect light not continuous, see page 2 CRI > 90 MacAdam 3 L 90 B10 72.000 h														
SELV														
Dimming	Standard: Dimmable to 1% via DALI-2, switch Dim				X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	06.	X X X.	
Mounting kit	Mounting version 0A 1500 mm steel cable suspension 3000 mm steel cable suspension Mounting version 0P 0V mounting brackets included				X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	X X.	A15. A30.	
					X X X X.	X X.	X X.	X X.	X X.	X X.	X X.	000.		

Please order power supply cable separately, see page 2

Pieces: Complete order number:

---, --, --, **00.** **01.** --, --, **06.** ---



www.sattler-lighting.com Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F and a light temperature of 4000K. 2) Weight of luminaire including power supply.

PALADIO TRACK 35

SATTLER

SYSTEM LUMINAIRE

Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
 Design: SATTLER

Accessories

Connection box

Surface mounted connection box + support of steel cable suspension
 220 - 240 VAC/DALI



L: 70 mm
 W: 70 mm
 H: 30 mm



12
 white powder coated
 RAL 9003



60
 silver
 anodised



62
 black
 anodised



65
 champ. gold
 anodised



66
 bronze
 anodised

Item No.	Quantity
2002.00.00.00.00. 12	_____
2002.00.00.00.00. 60	_____
2002.00.00.00.00. 62	_____
2002.00.00.00.00. 65	_____
2002.00.00.00.00. 66	_____

End caps for system luminaires

Set of two

Surface mounted
 Pendant



60
 silver
 anodised



62
 black
 anodised



65
 champ. gold
 anodised



66
 bronze
 anodised

2245.00.00.00.00. 60	_____
2245.00.00.00.00. 62	_____
2245.00.00.00.00. 65	_____
2245.00.00.00.00. 66	_____

Recessed



60
 silver
 anodised



62
 black
 anodised



65
 champ. gold
 anodised



66
 bronze
 anodised

2246.00.00.00.00. 60	_____
2246.00.00.00.00. 62	_____
2246.00.00.00.00. 65	_____
2246.00.00.00.00. 66	_____

Power supply cable

Power supply cable PVC transparent 1800 mm
 Power supply cable PVC transparent 3300 mm

Wiring between connected system luminaire by 220-240 VAC / DALI connecting brackets.

2000.00.00.00.00.00	_____
2001.00.00.00.00.00	_____

Connector set

The connector set is to be ordered separately in the respective quantity for each connection point. Connector Set consists of components for mechanical, optical and electrical connection, see page 4

symmetrical diffuser
 PRISM LENS TRACK

Surface mounted
 Recessed
 Pendant

2247.0P.00.00.00.00	_____
2248.0V.00.00.00.00	_____
2249.0A.00.00.00.00	_____

Cover for power track

black, 2m to be cut to size*

2278.00.00.00.00.62	_____
---------------------	-------

*under development

black, 3m to be cut to size*


2279.00.00.00.00.62	_____
---------------------	-------

PALADIO CONNECT Connection elements



Please order PALADIO CONNECT elements for system luminaires with separate specification sheet.

Connector Set

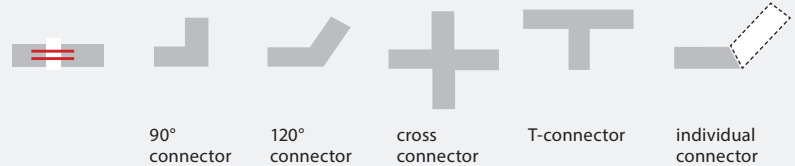


Technical information

L x W x H mm

Item No.
 System luminaire

Direct side - 48V DALI power track




1130 x 35 x 70 mm
 1410
 2250
 2810
 3370
 3930

2260.	
2261.	
2262.	
2263.	
2264.	
2265.	

Input voltage 220 - 240 VAC 50/60 Hz

Indirect side opal diffuser - illumination by segments



1130 x 35 x 70 mm
 1410
 2250
 2810
 3370
 3930

Item No.	Dimensions in mm	no indirect light	no indirect light	illuminated area
2260.				
2261.				
2262.				
2263.				
2264.				
2265.				

Maximum series connection

B 16A Circuit breaker (2,5 mm²)
 luminaire size up to 3m = 14 pcs.
 from 3m = 7 pcs.

B 10A Circuit breaker (1,5 mm²)
 luminaire size up to 3m = 8 pcs.
 from 3m = 4 pcs.

DALI programming

The table on the right shows the amount of DALI addresses necessary per fixture


			48V DALI power track	indirect light
1130	1410	2250	depending on the amount of light elements	+1
2810	3370	3930	depending on the amount of light elements	+1

PALADIO TRACK 35



Mounting versions

0A - Pendant luminaire

- Suspended with height adjustable steel cables (1500 mm or 3000 mm), adjustment to be done on ceiling
- Recommended minimum distance to ceiling for luminaires with indirect light is 500 mm to achieve even illumination
- Power supply integrated in luminaire.
- Position of suspension points can be repositioned on-site if necessary (within limits, please check with our office)
- Power supply cable included for single luminaires
- **Connection box optional**


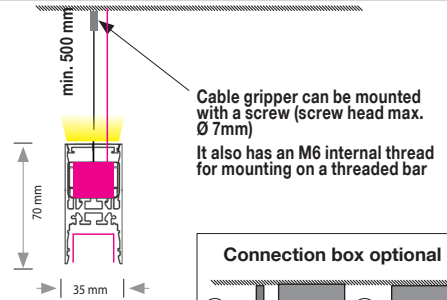


Suspension points

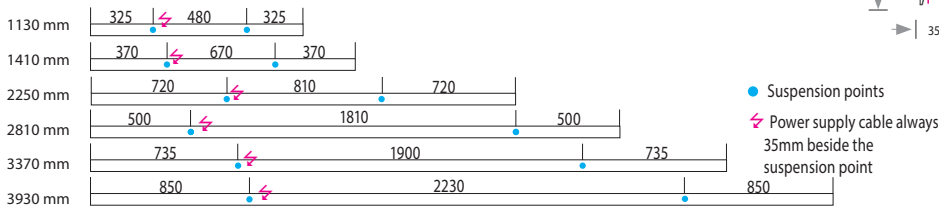


0P - Surface mounted luminaire

- Surface mounting with mounting brackets
- Position of mounting brackets can be adjusted on-site if necessary
- Power supply cable not included
- Power supply and terminal clamp integrated in luminaire
- Minimal distance to wall and other objects 50 mm
- Position of power supply outlet flexible

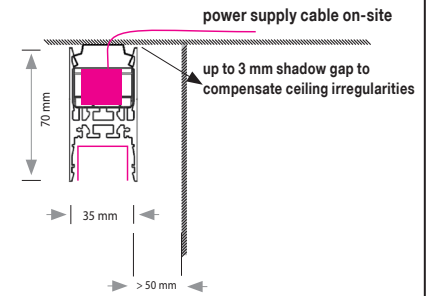



Fixation points

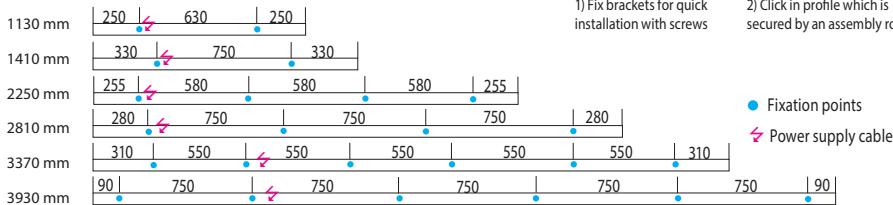


Dimensions in mm

0V - Recessed luminaire with frame

- Luminaire with springs for easy mounting in plasterboard ceiling
- Delivery with quick mounting plug (Adels AC 164/5) incl. 500 mm connection cable
- Up to ceiling thickness of 35 mm
- Fixation points can be adapted on-site if necessary

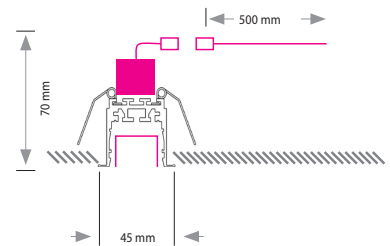

Fixation points

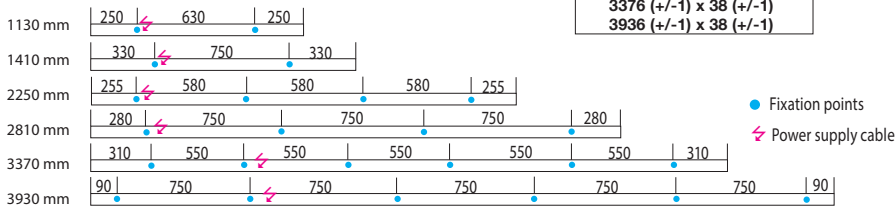


Dimensions in mm

PALADIO TRACK 35

Housing: Aluminium profile with integrated black 48V DALI power track and diverse light elements
 Design: SATTLER

Light elements and luminaires for 48V DALI power track

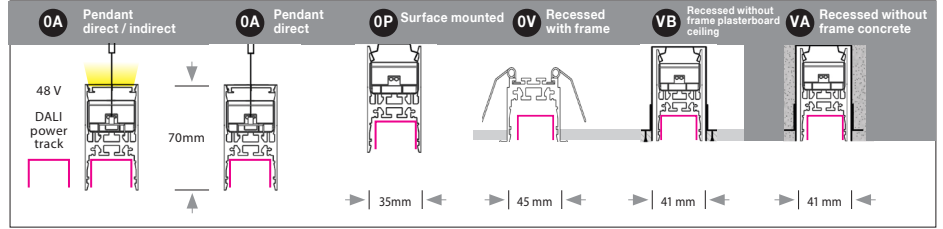

The integrated magnetic adapter allows any positioning of light elements with reflector, microprism or opal diffuser on the 48V track of the PALADIO profile.

Attachable lights from the SATTLER portfolio, such as FINO SPOT 2, FINO PENDANT, EVOLUTION SPOT, AVVENI SPOT, AVVENI PENDANT and PALITO can also be freely positioned on the track with the magnetic adapter.


Each individual system luminaire of the PALADIO system can be equipped with light elements with a maximum of 100W.

L x W x H mm	Wattage	Lumen	Weight ²⁾ kg	Item No.			
Light elements for 48V DALI power track							
- Housing colour black - control via track (DALI) - with adapter for power track: H=43 mm, visible H=25mm				-- . Light temperature optional 40. (4000 K) or 30. (3000 K)			
 Reflectors CRI > 95 UGR < 19	286 x 22 x 25 567 x 22 x 25 567 x 22 x 50 240° tilttable	5,2 9,9 9,9	412 865 865	0,20 0,38	2011. 2012. 2022.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z -- . 06.00.62.000.Z	
 Microprism CRI > 90 UGR < 25	567 x 22 x 25 1128 x 22 x 25	11,9 23,8	704 1409	0,28 0,56	2017. 2019.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z	
 Opal CRI > 90 UGR < 29	567 x 22 x 25 1128 x 22 x 25	11,9 23,8	1005 2011	0,28 0,56	2007. 2009.	-- . 06.00.62.000.Z -- . 06.00.62.000.Z	
Attachable lights for 48V DALI power track							
 FINO SPOT 2	Ø 22 / L 165	5	365	0,4	1539.	For further information see Spec Sheet FINO SPOT 2	
 FINO PENDANT	Ø 22 / L 600 Ø 22 / L 800 Ø 22 / L 1240 Ø 22 / L 1550	5 5 5 5	365 365 365 365	0,5 0,7 0,8 0,8	1533. 1534. 1535. 1536.	For further information see Spec Sheet FINO PENDANT	
 EVOLUTION SPOT	Ø 42 / L 110 24° 38°	6,3	858		1778. 1779.	For further information see Spec Sheet EVOLUTION SPOT	
 AVVENI SPOT	Ø 196 / L 270	max. 19	1268	1,6	1805.	For further information see Spec Sheet AVVENI SPOT	
 AVVENI PENDANT 1	Ø 196 / H 101	max. 19	1268	0,8	1211.	For further information see Spec Sheet AVVENI PENDANT 1	
 PALITO	Ø 22 / L 1240 Ø 22 / L 1550	15 22	1514 2270	3,1 4,4	1541. 1542.	For further information see Spec Sheet PALITO	

PALADIO SYSTEM

ORDER EXAMPLE

The diverse components of the PALADIO series give you the possibility to create your individually designed PALADIO SYSTEM LUMINAIRE. The illustration below shows only one of the various possibilities offered by the PALADIO System.

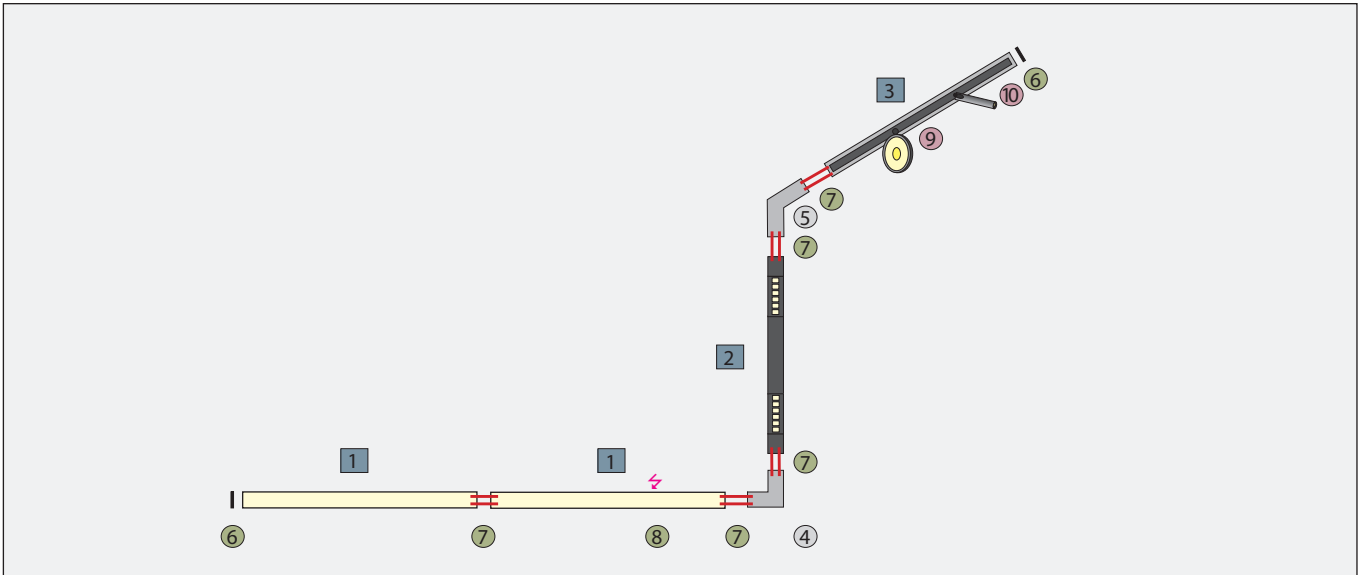

Luminaires	Connectors	Accessories	Light elements (TRACK)
<ul style="list-style-type: none"> 1 PRISM 1130 mm 2 LENS 1410 mm 3 TRACK 1410 mm 	<ul style="list-style-type: none"> 4 90° connector 5 120° connector 	<ul style="list-style-type: none"> 6 End caps 7 Connector Set 8 Power supply cable 	<ul style="list-style-type: none"> 9 AVVENI SPOT 10 FINO SPOT 2