



PALADIO WALL

DIRECT / INDIRECT


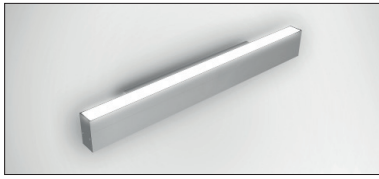


Housing: Aluminium profile with integrated microprismatic diffuser and power supply
Design: SATTLER

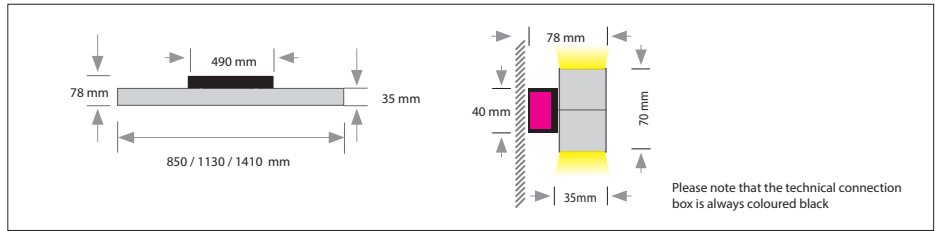

	L x W x H mm	Wattage direct / indirect	Lumen direct / indirect	Lumen / W direct / indirect	Weight ² /kg	Item No.	Mounting version	Finish	LED direct	LED indirect	Dimming	Power supply cable
Single luminaire	850 x 35 x 70	15 / 15	1.560 / 1.440	106 / 98	3,2	2300.	X X.	X X.	X X.	X X.	X X.	X X X.
	1130	20 / 20	2.080 / 1.920	106 / 98	3,8	2301.	X X.	X X.	X X.	X X.	X X.	X X X.
	1410	25 / 25	2.600 / 2.400	106 / 98	4,5	2302.	X X.	X X.	X X.	X X.	X X.	X X X.

Microprism - full surface illumination (direct/indirect)



Mounting version



Wall mounting

X X X X. **OP.** X X. X X. X X. X X. X X. X X. X X X.

Finish

Standard



66
bronze
anodised

Optional



60
silver
anodised



62
black
anodised



65
champ. gold
anodised

X X X X. X X. --. X X. X X. X X. X X. X X. X X X.

LED direct



CRI > 90
MacAdam 3 | L 80 | B10 | 72.000 h

LED

Standard: Neutral-white 4000 K
Optional: Warm-white 3000 K
Tunable white 2700 - 6500 K

X X X X. X X. X X. **40.** X X. X X. X X. X X. X X X.
X X X X. X X. X X. **30.** X X. X X. X X. X X. X X X.
X X X X. X X. X X. **80.** X X. X X. X X. X X. X X X.

DIFFUSER

Standard: Microprism symmetrical, 65° beam angle

X X X X. X X. X X. X X. **10.** X X. X X. X X. X X X.

SELV

LED indirect



CRI > 90
MacAdam 3 | L 80 | B10 | 72.000 h

LED

Standard: Neutral-white 4000 K
Warm-white 3000 K
Tunable white 2700 - 6500 K*
*Tunable white also necessary for direct side, only in combination with DALI dimming

X X X X. X X. X X. X X. X X. **40.** X X. X X. X X X.
X X X X. X X. X X. X X. X X. **30.** X X. X X. X X X.
X X X X. X X. X X. X X. X X. **80.** X X. X X. X X X.

DIFFUSOR

Standard: Microprism symmetrical 65° beam angle

X X X X. X X. X X. X X. X X. X X. **10.** X X. X X X.

Dimming

Standard: Dimmable TRIAC
Optional: Dimmable to 1% via DALI-2, switch Dim
Direct and indirect light only controllable together

X X X X. X X. X X. X X. X X. X X. X X. **11.** X X X.
X X X X. X X. X X. X X. X X. X X. X X. **06.** X X X.

Input voltage 220-240 VAC 50/60 Hz

Pieces:



Complete order



---	OP.	--.	--.	10.	--.	10.	--.	000.
-----	------------	-----	-----	------------	-----	------------	-----	-------------



Handcrafted in Germany, certified quality



IP 30 Protective rating of luminaire



Light distribution direct / indirect



Protection class I



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F