





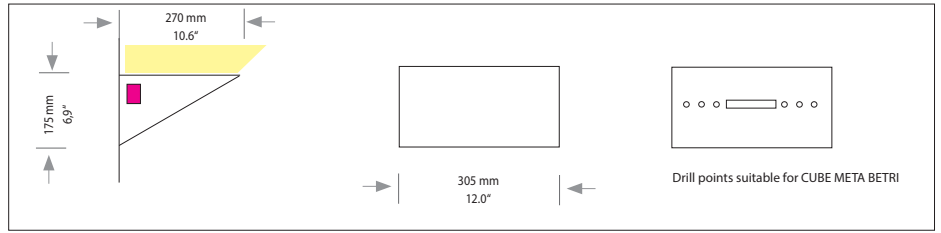



BECU

Housing: Wall mounted luminaire with aluminium housing

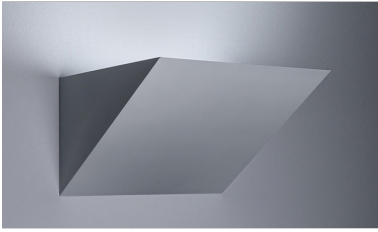

Size: L x W x H mm	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Mounting version
305 x 270 x 175 mm	86	6200	2,8/6,2	1581.	XX.	XX.	XX.	XX.	X
LED  CRI > 97 MacAdam 3 L 90 B10 72.000 h	Neutral-white 5000 K Sunlike Vollspektrum-LED Technologie			XXXX.	51.	XX.	XX.	XX.	X.
Dimming 	Dimmable to 1% via DALI, switch dim			XXXX.	XX.	61.	00.	XX.	X
Finishes  60 silver anodised  12 white, powder coated RAL 9003				XXXX.	XX.	XX.	XX.	---	X
Mounting version 	Mounting version P wall mounted compatible with existing mounting holes of CUBE, META, BETRI luminaires			XXXX.	XX.	XX.	XX.	XX.	P.

	1581.	51.	61.	00.	---	P.
--	-------	-----	-----	-----	-----	-----------

Complete order number

Input voltage is 220-240 VAC 50-60 Hz



Handcrafted in Germany, certified quality



Protective rating luminaire



Indirect light distribution



Protection class I



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.