



DUETTO MED

Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER

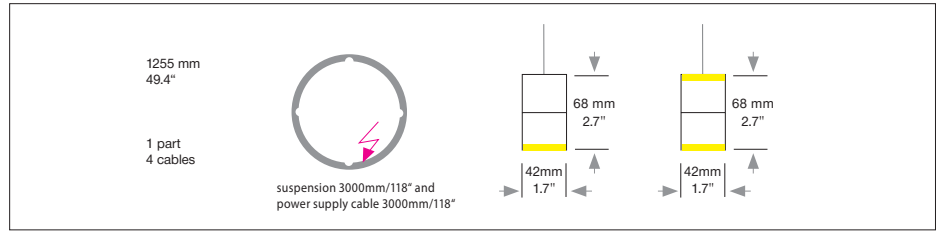

Sizes	Size: L x W x H mm	LED Watt direct/indirect	Lumen ¹⁾ direct/indirect	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	Ø 1255 mm	137 / 22	7.606 / 1.135	9,5 20.9	2091.	XX.	XX.	XX.	XX.	XX.X.	X
Direct and indirect light are switchable and dimmable together only.											
LED		Direct:	Neutral-white	5000 K	XXXX.	51.	XX.	XX.	XX.	XXX.	X
CRI > 97		Indirect:	Neutral-white without indirect light	5000 K	XXXX. XXXX.	XX. XX.	XX. XX.	51. 00.	XX. XX.	XXX. XXX.	X X
Sunlike Vollspektrum-LED Technologie											
Dimming		Standard:	Without Dimmer		XXXX.	XX.	02.	XX.	XX.	XXX.	X
		Optional:	1 - 10 V DALI CASAMBI		XXXX. XXXX. XXXX.	XX. XX. XX.	42. 62. 82.	XX. XX. XX.	XX. XX. XX.	XXX.X. XXX. XXX.	X X X
Finishes		12 white, similar RAL 9003			XXX.	XX.	XX.	XX.	12.	XXX.	X
Power supply cable		Z 70 Silver			XXX.	XX.	XX.	XX.	XX.	Z70.	X
Mounting Version					XXX.	XX.	XX.	XX.	XX.	XXX.	B

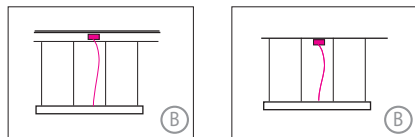

4 point suspension
with canopy
in suspended ceiling

4 point suspension
with canopy



2091.	51.	---	---	12.	Z70.	B
-------	-----	-----	-----	-----	------	---

Complete order number

Canopy:

(body white)

Type/Size mm / inch
Ø body / H

For use with
Mounting version

Protective
rating

DBS 300 Ø300 / 50mm / 11.8 / 1.9" **B** **IP 20**

Colour: 12 white, similar RAL 9003, contact factory for other finishes

Input voltage 220 - 240 VAC 50/60 Hz

