





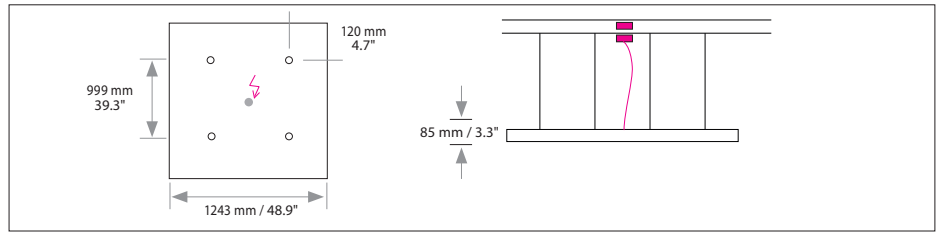


SKY MED

Housing: Aluminium profile frame, with translucent and antiseptic foil (fire rating B1)
 Design: SATTLER

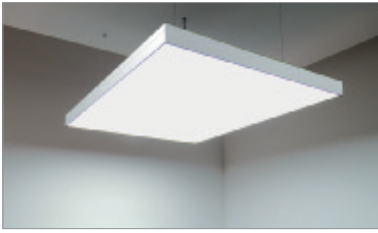

Sizes	Size: L x W x H mm	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
	LED full area 1243 x 1243 x 85	175	16.500	28 / 61.7	182.	x x .	x x .	x x .	x x .	x x x .	x .
LED	 Standard: Neutral-white 5000 K				x x x .	51.	x x .	x x .	x x .	x x x .	x .
CRI > 97	Sunlike Vollspektrum-LED Technologie										
											
Dimming	 Standard: Without Dimmer				x x x .	x x .	01.	00.	x x .	x x x .	x .
	Optional: 1 - 10 V DALI CASAMBI				x x x . x x x . x x x .	x x . x x . x x .	41. 61. 81.	00. 00. 00.	x x . x x . x x .	x x x . x x x . x x x .	x . x . x .
Finish	 12 white, powder coated, similar RAL 9003				x x x .	x x .	x x .	x x .	12.	x x x .	x .
Power supply cable	 Z 70 Silver				x x x .	x x .	x x .	x x .	x x .	Z70.	x .



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08





Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

SKY MED


Housing: Aluminium profile frame, white with translucent foil (fire rating B1)
 Design: SATTLER

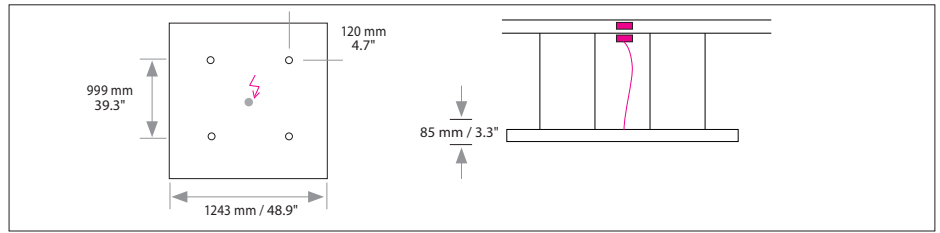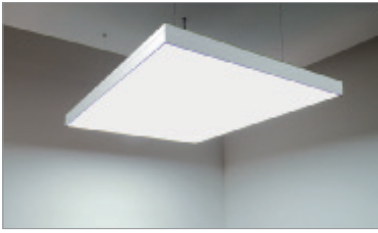

Mounting Version



4 point suspension with canopy in suspended ceiling



4 point suspension with canopy

B = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm / 118"
 and power supply cable 3000mm / 118"

	Canopy:		
	Type/ Size mm / inch Ø body / H	For use with Mounting version	Protective rating
	DBS 300 Ø 300 / 50mm / 11.8 / 1.9"	B	IP 20
	Colour: 12 white, similar RAL 9003, contact factory for other finishes		
	USA/Canada: Canopy mounts to 4" octagonal junction box.		

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
----------	-----	---------	-----	----------	--------------------	------------------

182.	51.	---	---	12.	Z70	B
-------------	------------	-----	-----	------------	------------	----------

Complete order number

Input voltage is **220-240 VAC 50/60 Hz**


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.