



GIOCO INDIRECT

Housing: Aluminium profile, integrated opal diffuser. Optional acoustic absorber.
 Design: SATTLER, THEOPHIL EICHLER

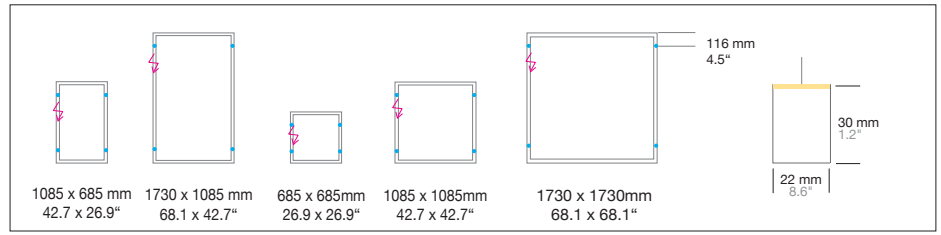


Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
Sizes											
1085 x 685 x 30	42.7 x 26.9 x 1.2"	63	3.480	2,8 / 6.17	1560.	x x .	x x .	x x .	x x .	x x x .	x
1730 x 1085 x 30	68.1 x 42.7 x 1.2"	102	5.570	4,2 / 9.25	1561.	x x .	x x .	x x .	x x .	x x x .	x
685 x 685 x 30	26.9 x 26.9 x 1.2"	47	2.720	2,2 / 4.85	1562.	x x .	x x .	x x .	x x .	x x x .	x
1085 x 1085 x 30	42.7 x 42.7 x 1.2"	78	4.270	3,4 / 7.49	1563.	x x .	x x .	x x .	x x .	x x x .	x
1730 x 1730 x 30	68.1 x 68.1 x 1.2"	125	6.870	5,2 / 11.46	1564.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V		Standard: Warm-white	3000 K		x x x .	30.	x x .	x x .	x x .	x x x .	x
CRI > 90		Optional: Neutral-white	4000 K		x x x .	40.	x x .	x x .	x x .	x x x .	x
		Extra warm-white	2700 K		x x x .	27.	x x .	x x .	x x .	x x x .	x
		Tunable white*	2700 - 6500 K		x x x .	80.	x x .	x x .	x x .	x x x .	x
		*(only in combination with dimming DMX , DALI, CASAMBI)									
Dimming		Standard: Without Dimmer			x x x .	x x .	01.	00.	x x .	x x x .	x
		Optional: DMX			x x x .	x x .	31.	00.	x x .	x x x .	x
		1 - 10 V			x x x .	x x .	41.	00.	x x .	x x x .	x
		0 - 10 V			x x x .	x x .	51.	00.	x x .	x x x .	x
		DALI			x x x .	x x .	61.	00.	x x .	x x x .	x
		CASAMBI			x x x .	x x .	81.	00.	x x .	x x x .	x
		ENOCEAN wireless push button			x x x .	x x .	91.	00.	x x .	x x x .	x
Finishes		Standard:									
		66	bronze anodised brushed		x x x .	x x .	x x .	x x .		x x x .	x
		62	black anodised brushed								
		65	champ. gold anodised brushed								
		60	silver anodised brushed								
Power supply Cable		Standard:									
		000	without Mounting Version F/R		x x x .	x x .	x x .	x x .	x x .		x
		Z 80	Black PVC								




Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

GIOCO INDIRECT


Housing: Aluminium profile, integrated opal diffuser. Optional acoustic absorber.
 Design: SATTLER, THEOPHIL EICHLER

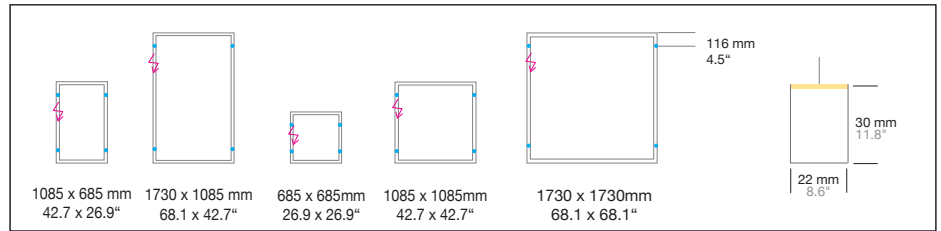


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




Suspension through canopy




4 current-carrying steel cables.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension with current-carrying steel cables and cavity wall box. B.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".

E, F = Minimum suspension height, half of the longest side

Including steel cable suspension 3000mm/118".

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Power supply unit:

Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R	IP 20

Input voltage for all external power supply units and canopy is 90-277 VAC 47-63 Hz

Canopy:

Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
DB 230 Ø 230 / 210 / 60 mm / 9.5 x 8.3 / 2.3"	B, E, F, H (685x685)	IP 20
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (1085x685 / 1085x1085)	IP 20
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (1730x1085 / 1730x1730)	IP 20

USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional




CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Ceiling fixation for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A, G



Handcrafted in Germany, certified quality



IP 50 Protective rating of luminaire



Indirect light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F