


BE1

Housing: Recessed downlight with aluminium frame
 Design: SATTLER

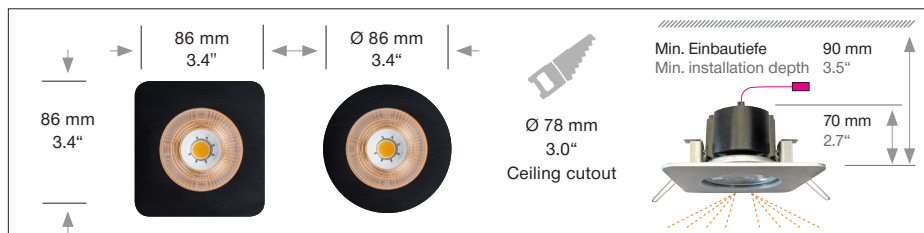

Sizes	Size: L x W / Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
	86 x 86	3.4 x 3.4	24°	9	840	0,2 / 0.44	1501.	x x.	x x.	x x.	x x.	x x x.	x
	86 x 86	3.4 x 3.4	36°	9	840	0,2 / 0.44	1502.	x x.	x x.	x x.	x x.	x x x.	x
	Ø 86	Ø 3.4	24°	9	840	0,2 / 0.44	1503.	x x.	x x.	x x.	x x.	x x x.	x
	Ø 86	Ø 3.4	36°	9	840	0,2 / 0.44	1504.	x x.	x x.	x x.	x x.	x x x.	x

Ideal for a ceiling thickness of 1-25 mm

LED	CRI > 90	Standard:	Neutral-white	4000 K	x x x x.	40.	x x.	x x.	x x.	x x x.	x
		Optional:	Warm-white	3000 K	x x x x.	30.	x x.	x x.	x x.	x x x.	x
			Extra warm-white	2700 K	x x x x.	27.	x x.	x x.	x x.	x x x.	x

Dimming	Standard:	Without Dimming	x x x x.	x x.	01.	00.	x x.	x x x.	x
	Optional:	Dimmable DALI Switch Dim, ready2mains™	x x x x.	x x.	61.	00.	x x.	x x x.	x

Finishes	Standard:	11 white RAL 9010	Optional:	10 black	62 black anodised	22 aluminium polished	60 silver anodised	x x x x.	x x.	x x.	x x.	--.	x x x.	x

Power supply included

Suitable for concrete mounting kit:
 (recommended) e.g.
KAISER 1290-40 without power supply
KAISER 1290-41 with transformer tunnel

Input voltage for all external power supply units and canopy is **198-264 VAC 50/60 Hz**

--.
--.
--.
00.
--.
--.
V

Complete order number

Handcrafted in Germany, certified quality	IP 20 Protective rating	Direct light distribution	Protection class III: only suitable for very low voltage supply (<50V)	Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.
---	--------------------------------	---------------------------	--	--