











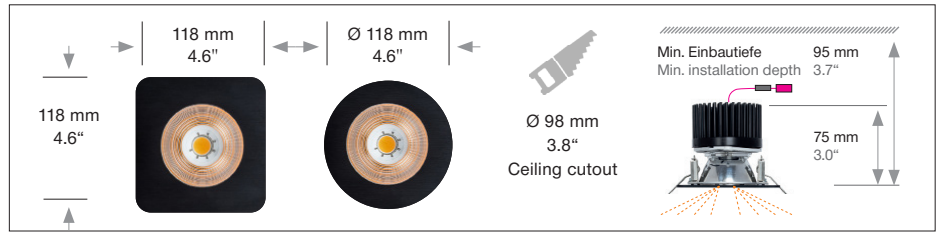


Housing: Recessed downlight with aluminium frame  
 Design: SATTLER



Sizes	Size: L x W / Ø mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version							
 	118 x 118	4.6 x 4.6	18°	18	2000	0,4 / 0.88	1016.	xx.	xx.	xx.	xx.	xxx.	x						
	118 x 118	4.6 x 4.6	30°	18	2000	0,4 / 0.88	1017.	xx.	xx.	xx.	xx.	xxx.	x						
	118 x 118	4.6 x 4.6	55°	18	2000	0,4 / 0.88	1018.	xx.	xx.	xx.	xx.	xxx.	x						
	Ø 118	Ø 4.6	18°	18	2000	0,4 / 0.88	1510.	xx.	xx.	xx.	xx.	xxx.	x						
	Ø 118	Ø 4.6	30°	18	2000	0,4 / 0.88	1511.	xx.	xx.	xx.	xx.	xxx.	x						
	Ø 118	Ø 4.6	55°	18	2000	0,4 / 0.88	1512.	xx.	xx.	xx.	xx.	xxx.	x						
ideal for a ceiling thickness of 1-25 mm																			
LED CRI > 95		Standard:	Neutral-white		4000 K		xxxx.	40.	xx.	xx.	xx.	xxx.	x						
		Optional:	Warm-white		3000 K		xxxx.	30.	xx.	xx.	xx.	xxx.	x						
			Extra warm-white		2700 K		xxxx.	27.	xx.	xx.	xx.	xxx.	x						
Dimming		Standard:	DALI, Switch Dim, 1-10 V				xxxx.	xx.	61.	00.	xx.	xxx.	x						
		Optional:	CASAMBI				xxxx.	xx.	81.	00.	xx.	xxx.	x						
Finishes	 Standard: 12 white, similar RAL 9003	 Optional: 10 black fine textured	 Premium: 22 aluminium polished	 60 silver anodised	 62 black anodised	xxxx.	xx.	xx.	xx.	<input type="checkbox"/>	xxx.	x							
													 65 champ. gold anodised	 66 bronze anodised					
Power supply	included, downlight and power supply connected with plug for easy installation																		
Option	IP 44 upgrade 210.00.00.00.00																		
	Suitable for concrete mounting kit: (recommended) e.g. KAISER 1290-40 without power supply KAISER 1290-41 with transformer tunnel																		
	For order quantities of more than 30 pieces, measures of the aluminium frame can be individually adjusted.																		
Input voltage for all external power supply units and canopy is 220-240 VAC 50/60 Hz						 <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>---</td> <td>---</td> <td>---</td> <td>00.</td> <td>---</td> <td>---</td> <td>V</td> </tr> </table>							---	---	---	00.	---	---	V
---	---	---	00.	---	---	V													
Complete order number																			

