


BE3 high output

Housing: Recessed downlight with aluminium frame
 Design: SATTLER



Size	Size: L x W / Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	142 x 142	5.6 x 5.6	11° 25	3000	0,6 / 1.32	1520.	xx.	xx.	xx.	xx.	xxx.	x
	142 x 142	5.6 x 5.6	20° 25	3000	0,6 / 1.32	1521.	xx.	xx.	xx.	xx.	xxx.	x
	142 x 142	5.6 x 5.6	47° 25	3000	0,6 / 1.32	1522.	xx.	xx.	xx.	xx.	xxx.	x
	142 x 142	5.6 x 5.6	asym. 25	3000	0,6 / 1.32	1523.	xx.	xx.	xx.	xx.	xxx.	x
	Ø 145	Ø 5.7	11° 25	3000	0,6 / 1.32	1524.	xx.	xx.	xx.	xx.	xxx.	x
	Ø 145	Ø 5.7	20° 25	3000	0,6 / 1.32	1525.	xx.	xx.	xx.	xx.	xxx.	x
	Ø 145	Ø 5.7	47° 25	3000	0,6 / 1.32	1526.	xx.	xx.	xx.	xx.	xxx.	x
	Ø 145	Ø 5.7	asym. 25	3000	0,6 / 1.32	1527.	xx.	xx.	xx.	xx.	xxx.	x
ideal for a ceiling thickness of 1-25 mm												
LED CRI > 95		Standard:	Neutral-white	4000 K		xxxx.	40.	xx.	xx.	xx.	xxx.	x
		Optional:	Warm-white	3000 K		xxxx.	30.	xx.	xx.	xx.	xxx.	x
			Extra warm-white	2700 K		xxxx.	27.	xx.	xx.	xx.	xxx.	x
Dimming		Standard:	DALI, Switch Dim			xxxx.	xx.	61.	00.	xx.	xxx.	x
		Optional:	CASAMBI			xxxx.	xx.	81.	00.	xx.	xxx.	x
Finishes		Standard:		Optional:		Premium:						xxxxx. xx. xx. xx. ---. xxx. x
Power supply	included, downlight and power supply connected with plug for easy installation											
Option	IP 44 upgrade 211.00.00.00.00											
	Suitable for concrete mounting kit: (recommended) e.g. KAISER 1292-14 + KAISER 1292-27 with transformer tunnel											
	For order quantities of more than 30 pieces, measures of the aluminium frame can be individually adjusted.											
Input voltage for all external power supply units and canopy is 220-240 VAC 50/60 Hz						Complete order number						

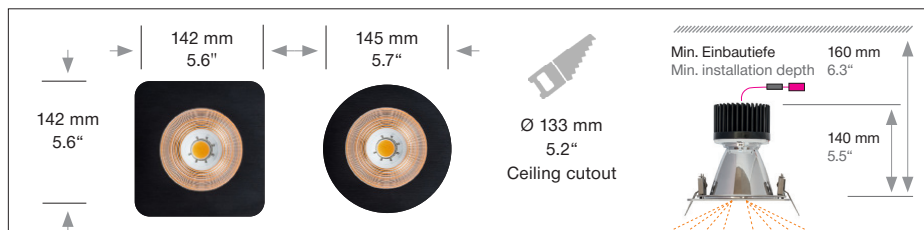