


BE3 high output

Housing: Recessed downlight with aluminium frame
 Design: SATTLER

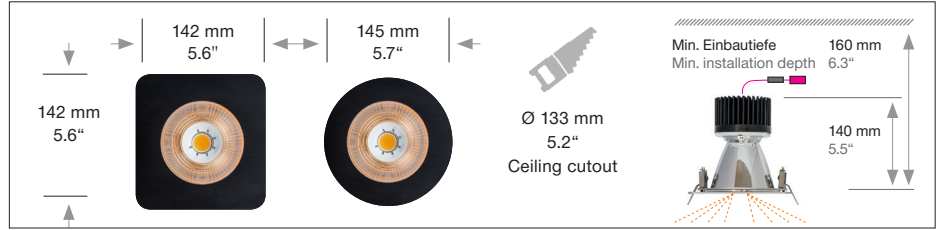

Size: L x W / Ø mm	Inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
142 x 142	5.6 x 5.6	11° 31	3600	0,6 / 1.32	1520.	x x.	x x.	x x.	x x.	x x x.	x
142 x 142	5.6 x 5.6	20° 31	3600	0,6 / 1.32	1521.	x x.	x x.	x x.	x x.	x x x.	x
142 x 142	5.6 x 5.6	47° 31	3600	0,6 / 1.32	1522.	x x.	x x.	x x.	x x.	x x x.	x
142 x 142	5.6 x 5.6	asym. 31	3600	0,6 / 1.32	1523.	x x.	x x.	x x.	x x.	x x x.	x
Ø 145	Ø 5.6	11° 31	3600	0,6 / 1.32	1524.	x x.	x x.	x x.	x x.	x x x.	x
Ø 145	Ø 5.6	20° 31	3600	0,6 / 1.32	1525.	x x.	x x.	x x.	x x.	x x x.	x
Ø 145	Ø 5.6	47° 31	3600	0,6 / 1.32	1526.	x x.	x x.	x x.	x x.	x x x.	x
Ø 145	Ø 5.6	asym. 31	3600	0,6 / 1.32	1527.	x x.	x x.	x x.	x x.	x x x.	x

ideal for a ceiling thickness of 1-25 mm

LED CRI > 90		Standard: Neutral-white	4000 K	x x x x.	40.	x x.	x x.	x x.	x x x.	x
		Optional: Warm-white	3000 K	x x x x.	30.	x x.	x x.	x x.	x x x.	x
		Extra warm-white	2700 K	x x x x.	27.	x x.	x x.	x x.	x x x.	x

Dimming		Standard: Without Dimming	x x x x.	x x.	01.	00.	x x.	x x x.	x
		Optional: Dimmable DALI	x x x x.	x x.	61.	00.	x x.	x x x.	x
		Switch Dim, ready2mains™ (Optional)	x x x x.	x x.	81.	00.	x x.	x x x.	x
		Dimmable CASAMBI Bluetooth 4.0 remote control through app. ENOCEAN wireless push button	x x x x.	x x.	91.	00.	x x.	x x x.	x

Finishes		Standard: 11 white RAL 9010	Optional:	10 black	62 black anodised	22 aluminium polished	60 silver anodised	x x x x.	x x.	x x.	x x.	---	x x x.	x

Power supply	included, downlight and power supply connected with plug for easy installation
Option	<p>IP 44 upgrade 211.00.00.00</p> <p>Suitable for concrete mounting kit: (recommended) e.g. KAISER 1292-14 + KAISER 1292-27 with transformer tunnel</p> <p>For order quantities of more than 30 pieces, measures of the aluminium frame can be individually adjusted.</p>

Input voltage for all external power supply units and canopy is 198-264 VAC 50/60 Hz		<table border="1"> <tr> <td>---</td> <td>---</td> <td>---</td> <td>00.</td> <td>---</td> <td>---</td> <td>V</td> </tr> </table>	---	---	---	00.	---	---	V
---	---	---	00.	---	---	V			
Complete order number									

Handcrafted in Germany, certified quality	IP 20 Protective rating	Light distribution direct /	Protection class III: only suitable for very low voltage supply (<50V)	Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.
---	--------------------------------	-----------------------------	--	--