


## BE3

Housing: Recessed downlight with aluminium frame  
 Design: SATTLER

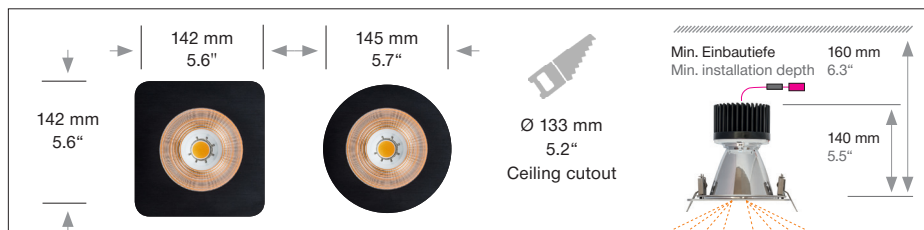

Sizes	Size: L x W / Ø mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
	142 x 142	5.6 x 5.6	11°	18	2000	0,6 / 1.32	<b>1019.</b>	x x.	x x.	x x.	x x.	x x x.	x
	142 x 142	5.6 x 5.6	20°	18	2000	0,6 / 1.32	<b>1020.</b>	x x.	x x.	x x.	x x.	x x x.	x
	142 x 142	5.6 x 5.6	47°	18	2000	0,6 / 1.32	<b>1021.</b>	x x.	x x.	x x.	x x.	x x x.	x
	142 x 142	5.6 x 5.6	asym.	18	2000	0,6 / 1.32	<b>1022.</b>	x x.	x x.	x x.	x x.	x x x.	x
	Ø 145	Ø 5.7	11°	18	2000	0,6 / 1.32	<b>1513.</b>	x x.	x x.	x x.	x x.	x x x.	x
	Ø 145	Ø 5.7	20°	18	2000	0,6 / 1.32	<b>1514.</b>	x x.	x x.	x x.	x x.	x x x.	x
	Ø 145	Ø 5.7	47°	18	2000	0,6 / 1.32	<b>1515.</b>	x x.	x x.	x x.	x x.	x x x.	x
	Ø 145	Ø 5.7	asym.	18	2000	0,6 / 1.32	<b>1516.</b>	x x.	x x.	x x.	x x.	x x x.	x

ideal for a ceiling thickness of 1-25 mm

LED	LED	Standard:	Neutral-white	4000 K	x x x x.	40.	x x.	x x.	x x.	x x.	x
CRI > 97		Optional:	Warm-white	3000 K	x x x x.	30.	x x.	x x.	x x.	x x.	x
			Extra warm-white	2700 K	x x x x.	27.	x x.	x x.	x x.	x x.	x

Dimming	Standard:	Without Dimming	x x x x.	x x.	01.	00.	x x.	x x x.	x
	Optional:	Dimmable DALI	x x x x.	x x.	61.	00.	x x.	x x x.	x
		Switch Dim, ready2mains™	x x x x.	x x.	81.	00.	x x.	x x x.	x
		Dimmable CASAMBI	x x x x.	x x.	91.	00.	x x.	x x x.	x
		Bluetooth 4.0 remote control through app.							
		ENOCEAN wireless push button							

Finishes	Standard:	11	white	RAL 9010	Optional:	10	black	62	black anodised	22	aluminium polished	60	silver anodised	x x x x.	x x.	x x.	x x.	x x.	x	

<b>Power supply</b>	included, downlight and power supply connected with plug for easy installation
<b>Option</b>	<p><b>IP 44 upgrade</b> <span style="float: right;"><b>211.00.00.00</b></span></p> <p><b>Suitable for concrete mounting kit:</b>                      (recommended) e.g.  <b>KAISER 1292-14 + KAISER 1292-27 with transformer tunnel</b></p> <p><b>For order quantities of more than 30 pieces, measures of the aluminium frame can be individually adjusted.</b></p>

Input voltage for all external power supply units and canopy is **198-264 VAC 50/60 Hz**

\_ \_ \_ . **00.** \_ \_ . \_ \_ . **V**
  
**Complete order number**

	Handcrafted in Germany, certified quality		Protective rating		Light distribution direct /		Protection class III: only suitable for very low voltage supply (<50V)		Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.
--	---	--	-------------------	--	-----------------------------	--	--	--	--