


CIRCOLO INVERSE

Housing: Aluminium profile with opal diffuser on the outside
 Design: SATTLER



Sizes	Size: Ø x H x W mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
	Ø 1320 x 160 x 70	51.9 x 6.3 x 2,7	75	6.402	20 / 44.0	265.	x x.	x x.	x x.	x x.	x x x.	x
	Ø 1600 x 160 x 70	62.9 x 6.3 x 2,7	93	7.789	25 / 55.1	266.	x x.	x x.	x x.	x x.	x x x.	x
	Ø 2300 x 160 x 70	90.5 x 6.3 x 2,7	136	11.372	35 / 77.1	267.	x x.	x x.	x x.	x x.	x x x.	x
	Ø 2600 x 160 x 70	102.3 x 6.3 x 2,7	156	13.270	40 / 88.1	268.	x x.	x x.	x x.	x x.	x x x.	x
LED 24V CRI > 90		Standard: Neutral-white Optional: Warm-white Extra warm-white Tunable white* RGB colour control* RGB + Neutral-White*	4000 K 3000 K 2700 K 2700 - 6500 K 4000 K	40. 30. 27. 80. 60. 60.	x x x. x x x. x x x. x x x. x x x. x x x.	40. 30. 27. 80. 60. 60.	x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x	
Dimming		Standard: Without Dimmer Optional: DMX 1 - 10 V 0 - 10 V DALI CASAMBI ENOCEAN wireless push button				x x x. x x x. x x x. x x x. x x x. x x x.	x x. x x. x x. x x. x x. x x.	01. 31. 41. 51. 61. 81. 91.	00. 00. 00. 00. 00. 00. 00.	x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x
Finish		Standard: 12 white, powder coated, similar RAL 9003 Optional (Powder coated):	11 white, similar RAL 9010 10 black fine textured 30 anthracite fine textured 32 crocodile black 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper XX Custom finish			x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x.	--- ---	x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x
Power supply cable		Standard: Z 70 Silver Optional: Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green Without power cable 000 Current-carrying F, R, T, K				x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x.	--- ---	x x x x x x

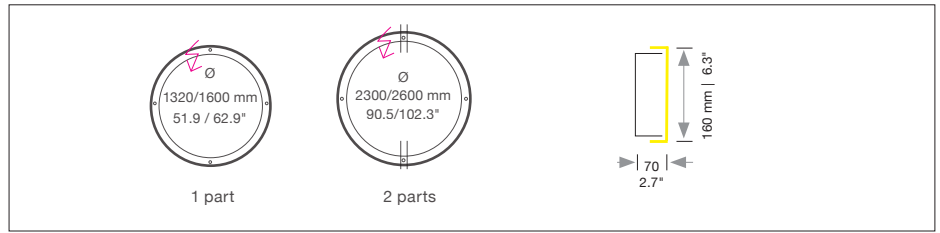

Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution outwards




Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

CIRCOLO INVERSE

Housing: Aluminium profile with opal diffuser on the outside
 Design: SATTLER

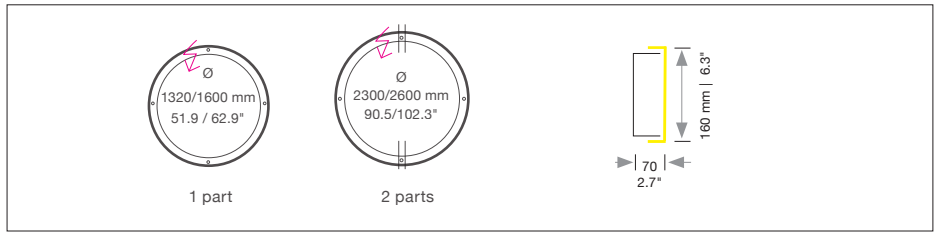

Mounting Version

Standard 										
4-point suspension with external power supply unit in suspended ceiling	4-point suspension with external power supply unit in separate canopy	Up to Ø 1600 mm 1-point suspension with external power supply unit in separate canopy	Up to Ø 1600 mm suspension through canopy	Up to Ø 1600 mm 4 current-carrying steel cables. Only 1 strip LED possible	Up to Ø 1600 mm suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"					
				Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
Up to Ø 1600 mm suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" (not in combination with RGB)	Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling	Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy	Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling. (up to Ø 1600 mm)	X X X.	X X.	X X.	X X.	X X.	X X X	-

A, B, C, G, H, K = Distance of external power supply unit to light fixture max. 10m / 394".
E, F, S, T, K = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture
 Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

Complete order number

---	---	---	---	---	---
-----	-----	-----	-----	-----	-----

Power supply units: (1 LED Stripe)			
Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating	
DE 1F 360 x 150 x 85 14.2 x 5.9 x 3.3"	Ø 1320 / 29.5" Ø 1600 / 62.9"	A, C, G, K A, C, G	IP 20
DE 2F 360 x 300 x 85 14.2 x 11.8 x 3.3"	Ø 2300 / 90.5" Ø 2600 / 102.3"	A, G A, G	IP 20

Canopy: (1 LED Stripe)			
Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating	
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (up to size Ø 1320)	IP 20	
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, H (up to size Ø 2600)	IP 20	
PB 366 Ø 90 H 366 mm / 3.5 x 14.4"	S, T	IP 20	

Colour: 12 white, similar RAL 9003, contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Optional



LED spot Set (2 spots)
 LED Spot max. 9° Set (2) white / black
 LED Spot max. 26° Set (2) white / black
 LED Spot max. 36° Set (2) white / black
 LED Spot max. 60° Set (2) white / black

CASAMBI wall-switch
 Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

Ceiling fixation for mounting version A
 Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.

910.68.01.18. 12/10
911.68.01.18. 12/10
912.68.01.18. 12/10
913.68.01.18. 12/10
207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10 (black)
200. 00. 00. 00. 12 (white)

		Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08	IP 20 Protective rating of luminaire		Light distribution outwards		Protection class III: only suitable for very low voltage supply (<50V)		Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F
--	--	--	---	--	-----------------------------	--	--	--	--