




CIRCOLO

I-Version

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER, Patented

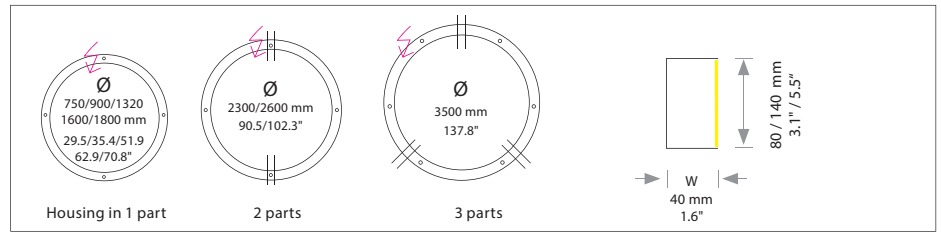


| Size: Ø x H x W mm / inches | LED Watt | Lumen ¹⁾ | Weight ²⁾ kg / lbs | Item No. | LED | Dimming | LED | Finishes | Power supply cable | Total height | Mounting version |
|---|--|---------------------|-------------------------------|--------------|------------|------------|------------|----------|--------------------|--------------|------------------|
| Sizes | | | | | | | | | | | |
| Ø 750 / 29.5" H 80 / 3.1" W 40 / 1.6" | 48 | 3.136 | 8 / 17.6 | 252. | x x. | x x. | x x. | x x. | x x x. | 80 | x |
| Ø 900 / 35.5" H 80 / 3.1" W 40 / 1.6" | 57 | 3.786 | 10 / 22.0 | 253. | x x. | x x. | x x. | x x. | x x x. | 80 | x |
| Ø 1320 / 51.9" H 80 / 3.1" W 40 / 1.6" | 83 | 5.724 | 20 / 44.0 | 254. | x x. | x x. | x x. | x x. | x x x. | 80 | x |
| Ø 1600 / 62.9" H 80 / 3.1" W 40 / 1.6" | 101 | 6.909 | 25 / 55.1 | 255. | x x. | x x. | x x. | x x. | x x x. | 80 | x |
| Ø 1800 / 70.8" H 80 / 3.1" W 40 / 1.6" | 114 | 7.780 | 30 / 66.0 | 256. | x x. | x x. | x x. | x x. | x x x. | 80 | x |
| Ø 2300 / 90.5" H 80 / 3.1" W 40 / 1.6" | 145 | 10.035 | 35 / 77.2 | 257. | x x. | x x. | x x. | x x. | x x x. | 80 | x |
| Ø 2600/102.3" H 80 / 3.1" W 40 / 1.6" | 164 | 11.117 | 40 / 88.0 | 258. | x x. | x x. | x x. | x x. | x x x. | 80 | x |
| Ø 3500/137.8" H 80 / 3.1" W 40 / 1.6" | 220 | 14.927 | 53 / 117.0 | 259. | x x. | x x. | x x. | x x. | x x x. | 80 | x |
| From H 140 we recommend a second LED row | | | | | | | | | | | |
| Ø 1320 / 51.9" H 140 / 5.5" W 40 / 1.6" | 83 | 6.282 | 20 / 44.0 | 1600. | x x. | x x. | x x. | x x. | x x x. | 140 | x |
| Ø 1600 / 62.9" H 140 / 5.5" W 40 / 1.6" | 101 | 7.702 | 25 / 55.1 | 1601. | x x. | x x. | x x. | x x. | x x x. | 140 | x |
| Ø 1800 / 70.8" H 140 / 5.5" W 40 / 1.6" | 114 | 8.699 | 30 / 66.0 | 1602. | x x. | x x. | x x. | x x. | x x x. | 140 | x |
| Ø 2300 / 90.5" H 140 / 5.5" W 40 / 1.6" | 145 | 11.327 | 35 / 77.2 | 1603. | x x. | x x. | x x. | x x. | x x x. | 140 | x |
| Ø 2600/102.3" H 140 / 5.5" W 40 / 1.6" | 164 | 12.451 | 40 / 88.0 | 1604. | x x. | x x. | x x. | x x. | x x x. | 140 | x |
| Ø 3500/137.8" H 140 / 5.5" W 40 / 1.6" | 220 | 16.849 | 53 / 117.0 | 1605. | x x. | x x. | x x. | x x. | x x x. | 140 | x |
| LED 24V | Standard: Neutral-white 4000 K | | | x x x x. | 40. | x x. | x x. | x x. | x x x. | x x x. | x |
| CRI > 90 | Optional: | | | | | | | | | | |
| | Warm-white 3000 K | | | x x x x. | 30. | x x. | x x. | x x. | x x x. | x x x. | x |
| | Extra warm-white 2700 K | | | x x x x. | 27. | x x. | x x. | x x. | x x x. | x x x. | x |
| | Tunable white* 2700 - 6500 K | | | x x x x. | 80. | x x. | x x. | x x. | x x x. | x x x. | x |
| | RGB colour control* | | | x x x x. | 60. | x x. | 00. | x x. | x x x. | x x x. | x |
| | RGB + Neutral-White* 4000 K | | | x x x x. | 60. | x x. | 40. | x x. | x x x. | x x x. | x |
| | *only in combination with dimming DMX, DALI, CASAMBI) Combinations up to 2 stripes (H80) and 3 stripes (H140) of LED possible | | | | | | | | | | |
| Dimming | Standard: Without Dimmer | | | x x x x. | x x. | 01. | 00. | x x. | x x x. | x x x. | x |
| | Optional: | | | | | | | | | | |
| | DMX | | | x x x x. | x x. | 31. | 00. | x x. | x x x. | x x x. | x |
| | 1 - 10 V | | | x x x x. | x x. | 41. | 00. | x x. | x x x. | x x x. | x |
| | 0 - 10 V | | | x x x x. | x x. | 51. | 00. | x x. | x x x. | x x x. | x |
| | DALI | | | x x x x. | x x. | 61. | 00. | x x. | x x x. | x x x. | x |
| | CASAMBI | | | x x x x. | x x. | 81. | 00. | x x. | x x x. | x x x. | x |
| | ENOCEAN wireless push button | | | x x x x. | x x. | 91. | 00. | x x. | x x x. | x x x. | x |



CIRCOLO

I-Version

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER, Patented

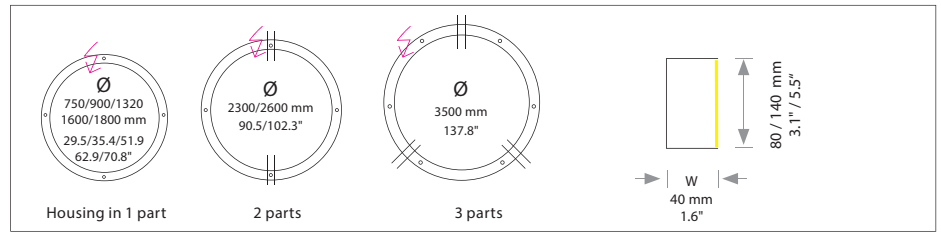

| | | Item No. | LED | Dimming | LED | Finishes | Power supply cable | Total height | Mounting version | |
|---------------------------|----------------------------------|---|----------|---------|------|----------|--------------------|--------------|------------------|---|
| Finish | Standard: | | | | | | | | | |
| | Optional (Powder coated): | 11 white, similar RAL 9010 10 black fine textured 30 anthracite fine textured 32 crocodile black 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper | | | | | | | | |
| | Optional (Premium): | 22 aluminium polished 27 brush-finished aluminium 44 wood veneer, white borders XX Custom finish | X X X X. | X X. | X X. | X X. | --- | X X X. | X X X. | X |
| Power supply cable | Standard: | Z 70 Silver | | | | | | | | |
| | Optional: | Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green 000 Without power cable Current-carrying F, R, T, K | X X X X. | X X. | X X. | X X. | X X. | --- | X X X. | X |



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards





Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Housing: Aluminium profile with integrated opal diffuser
 Design: SATTLER, Patented

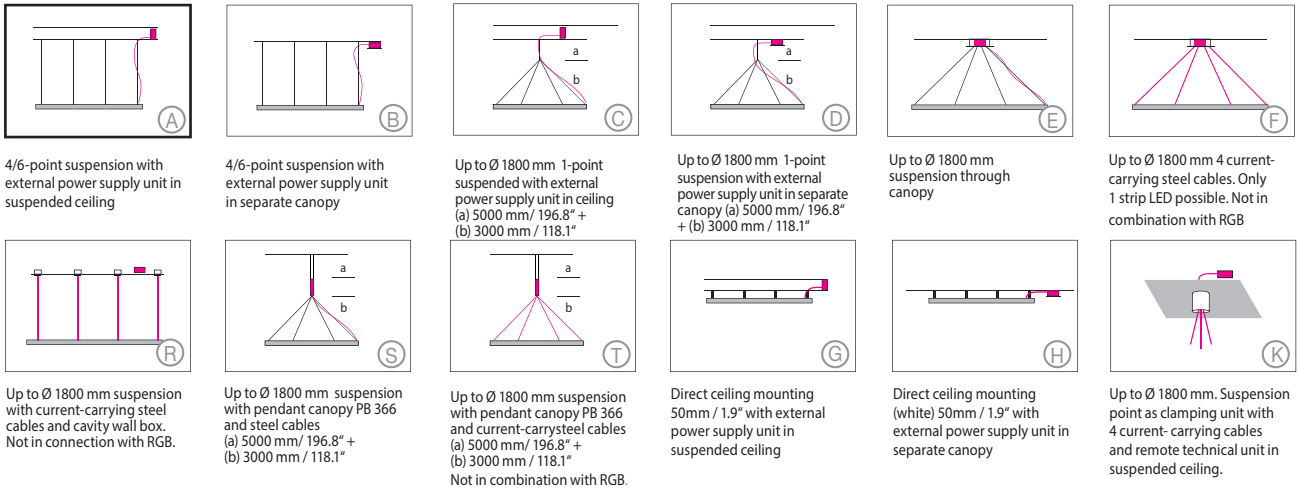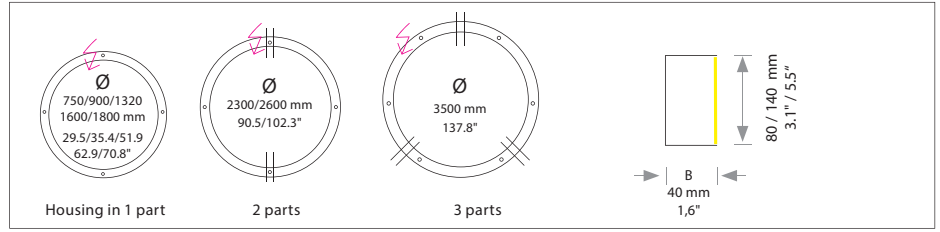

Mounting Version

A, B, C, D, G, H, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R,T 3000mm/118";
 Version C,D,S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

| Item No. | LED | Dimming | LED | Finishes | Power supply cable | Total height | Mounting Version |
|----------|------|---------|------|----------|--------------------|--------------|------------------|
| X X X X. | X X. | X X. | X X. | X X. | X X X. | X X X. | - . |

Power supply units:

| Type / Size mm / inch L x W x H | For use with Mounting version | Protective rating |
|---|------------------------------------|-------------------|
| DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3" | A,C,G,R,K (up to Ø 1800 mm) | IP 20 |
| DE 2F 360 x 300 x 85 mm / 14.2 x 11.8 x 3.3" | A,G (up to Ø 3500 mm) | IP 20 |

Canopy:

| Type / Size mm / inch Ø cover plate / body / H | For use with Mounting version | Protective rating |
|--|-------------------------------------|-------------------|
| DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3" | B, D, E, F, H (up to Ø 1800) | IP 20 |
| DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3" | B, H (up to Ø 3500) | IP 20 |
| PB 366 Ø 90 H 366 mm / 3.5 x 14.4" | S, T (up to Ø 1320) | IP 20 |
| PB 656 Ø 90 H 656 mm / 3.5 x 25.8" | S, T (up to Ø 1800) | IP 20 |

Colour: 12 white, similar RAL 9003, contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Complete order number




Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Ceiling fixation for mounting version A

200. 00. 00. 00. 12 (white)


Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.