


## CIRCOLO

### L-Version



Housing: Aluminium profile with L-shaped diffuser  
 Design: SATTLER, Patented

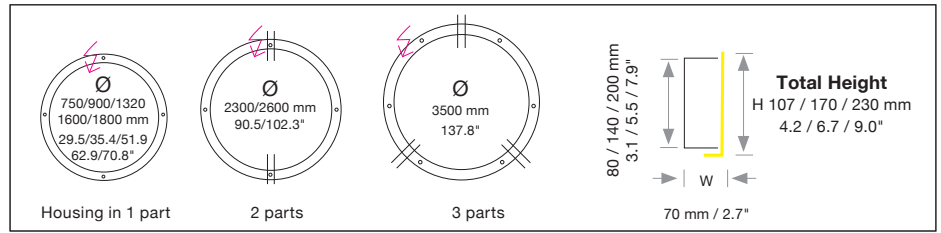

Size: Ø x H x W mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Total height	Mounting version
<b>Sizes</b>												
Ø 750 / 29.5"	H 107 / 4.2" W 70 / 2.7"	48	3.381	8 / 17.6	<b>228.</b>	XX.	XX.	XX.	XX.	XXX.	<b>107</b>	X
Ø 900 / 35.5"	H 107 / 4.2" W 70 / 2.7"	57	4.091	10 / 22.0	<b>229.</b>	XX.	XX.	XX.	XX.	XXX.	<b>107</b>	X
Ø 1320 / 51.9"	H 107 / 4.2" W 70 / 2.7"	83	6.115	20 / 44.0	<b>230.</b>	XX.	XX.	XX.	XX.	XXX.	<b>107</b>	X
Ø 1600 / 62.9"	H 107 / 4.2" W 70 / 2.7"	101	7.431	25 / 55.1	<b>231.</b>	XX.	XX.	XX.	XX.	XXX.	<b>107</b>	X
Ø 1800 / 70.8"	H 107 / 4.2" W 70 / 2.7"	114	8.153	30 / 66.0	<b>238.</b>	XX.	XX.	XX.	XX.	XXX.	<b>107</b>	X
Ø 2300 / 90.5"	H 107 / 4.2" W 70 / 2.7"	145	10.747	35 / 77.2	<b>232.</b>	XX.	XX.	XX.	XX.	XXX.	<b>107</b>	X
Ø 2600 / 102.3"	H 107 / 4.2" W 70 / 2.7"	164	12.838	40 / 88.0	<b>234.</b>	XX.	XX.	XX.	XX.	XXX.	<b>107</b>	X
<b>From H 170 we recommend a second LED row</b>												
Ø 1320 / 51.9"	H 170 / 6.7" W 70 / 2.7"	83	6.539	20 / 44.0	<b>1590.</b>	XX.	XX.	XX.	XX.	XXX.	<b>170</b>	X
Ø 1600 / 62.9"	H 170 / 6.7" W 70 / 2.7"	101	7.993	25 / 55.1	<b>1591.</b>	XX.	XX.	XX.	XX.	XXX.	<b>170</b>	X
Ø 1800 / 70.8"	H 170 / 6.7" W 70 / 2.7"	114	9.043	30 / 66.0	<b>1592.</b>	XX.	XX.	XX.	XX.	XXX.	<b>170</b>	X
Ø 2300 / 90.5"	H 170 / 6.7" W 70 / 2.7"	145	11.578	35 / 77.2	<b>1593.</b>	XX.	XX.	XX.	XX.	XXX.	<b>170</b>	X
Ø 2600/102.3"	H 170 / 6.7" W 70 / 2.7"	164	12.838	40 / 88.0	<b>1594.</b>	XX.	XX.	XX.	XX.	XXX.	<b>170</b>	X
Ø 3500/137.8"	H 170 / 6.7" W 70 / 2.7"	220	17.320	53 / 117.0	<b>1595.</b>	XX.	XX.	XX.	XX.	XXX.	<b>170</b>	X
Ø 3500/137.8"	H 230 / 9.0" B 70 / 2.7"	220	19.385	53 / 117.0	<b>1596.</b>	XX.	XX.	XX.	XX.	XXX.	<b>230</b>	X
<b>LED</b> 24V		<b>Standard: Neutral-white</b>	<b>4000 K</b>		XXXX.	<b>40.</b>	XX.	XX.	XX.	XXX.	XXX.	X
CRI > 90		Optional:	Warm-white	3000 K	XXXX.	<b>30.</b>	XX.	XX.	XX.	XXX.	XXX.	X
			Extra warm-white	2700 K	XXXX.	<b>27.</b>	XX.	XX.	XX.	XXX.	XXX.	X
			Tunable white*	2700 - 6500 K	XXXX.	<b>80.</b>	XX.	XX.	XX.	XXX.	XXX.	X
			RGB colour control*		XXXX.	<b>60.</b>	XX.	<b>00.</b>	XX.	XXX.	XXX.	X
			RGB + Neutral-White	4000 K	XXXX.	<b>60.</b>	XX.	<b>40.</b>	XX.	XXX.	XXX.	X
			*only in combination with dimming DMX, DALI, CASAMBI Combinations up to 2 stripes (H107) and 3 stripes (H170/230) of LED possible									
<b>Dimming</b>		<b>Standard: Without Dimmer</b>			XXXX.	XX.	<b>01.</b>	<b>00.</b>	XX.	XXX.	XXX.	X
		Optional:	DMX		XXXX.	XX.	<b>31.</b>	<b>00.</b>	XX.	XXX.	XXX.	X
			1 - 10 V		XXXX.	XX.	<b>41.</b>	<b>00.</b>	XX.	XXX.	XXX.	X
			0 - 10 V		XXXX.	XX.	<b>51.</b>	<b>00.</b>	XX.	XXX.	XXX.	X
			DALI		XXXX.	XX.	<b>61.</b>	<b>00.</b>	XX.	XXX.	XXX.	X
			CASAMBI		XXXX.	XX.	<b>81.</b>	<b>00.</b>	XX.	XXX.	XXX.	X
			ENOCEAN wireless push button		XXXX.	XX.	<b>91.</b>	<b>00.</b>	XX.	XXX.	XXX.	X



Complete order number



# SATTLER

## CIRCOLO

### L-Version

Housing: Aluminium profile with L-shaped diffuser  
 Design: SATTLER, Patented



reddot design award  
winner 2009

Designpreis  
Deutschland  
2011  
NOMINIERT

Focus Open  
Gold 2009

Housing in 1 part

2 parts

3 parts

#### Finish

##### Standard:



**12**  
white, powder coated, similar RAL 9003

Optional (Powder coated):



**11**  
white, similar RAL 9010



**10**  
black fine textured



**30**  
anthracite fine textured



**32**  
crocodile black



**33**  
sand silver fine textured



**34**  
bronze satined



**35**  
gold



**36**  
brass



**37**  
bronze fine textured



**38**  
copper



Optional (Premium):

**22**  
aluminium polished



**27**  
brush-finished aluminium



**44**  
wood veneer, white borders



**45**  
Leather



**XX**  
Custom finish

#### Power supply cable

##### Standard:



**Z 70**  
Silver

Optional:



**Z 71**  
white



**Z 72**  
grey



**Z 73**  
black



**Z 74**  
orange



**Z 75**  
red



**Z 76**  
green



**000**  
Current-carrying F, R, T, K

	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Total height	Mounting version
Finish								
Standard: 12								
Optional (Powder coated): 11, 10, 30, 32, 33								
Optional (Premium): 22, 27, 44, 45, XX	X X X X.	X X.	X X.	X X.	_____	X X X.	X X X.	X
Power supply cable								
Standard: Z 70								
Optional: Z 71, Z 72, Z 73, Z 74, Z 75, Z 76, 000	X X X X.	X X.	X X.	X X.	X X.	_____	X X X.	X



--	--	--	--	--	--	--	--

Complete order number



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards




Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

## CIRCOLO

### L-Version

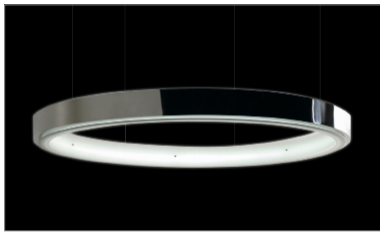

Housing: Aluminium profile with L-shaped diffuser  
 Design: SATTLER, Patented

red dot design award  
winner 2009

Designpreis  
Deutschland  
2014  
NOMINIERT

Housing in 1 part

2 parts

3 parts

<b>Standard</b>						
4/6-point suspension with external power supply unit in suspended ceiling	4/6-point suspension with external power supply unit in separate canopy	Up to Ø 1800 mm 1-point suspended with external power supply unit in ceiling (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"	Up to Ø 1800 mm 1-point suspension with external power supply unit in separate canopy (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"	Up to Ø 1800 mm suspension through canopy	Up to Ø 1800 mm 4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB	
Up to Ø 1800 mm suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.	Up to Ø 1800 mm suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"	Up to Ø 1800 mm suspension with pendant canopy PB 366 and current-carrying steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.	Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling	Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy	Up to Ø 1800 mm. Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.	

### Mounting Version

A, B, C, D, G, H, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R,T 3000mm/118";  
 Version C,D,S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Total height	Mounting Version
X X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	-

**Power supply units:**

Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
<b>DE 1F</b> 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>A,C,G,R,K</b> (up to Ø 1800 mm)	
<b>IP 20 DE 2F</b>	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	
<b>A,G</b> (up to Ø 3500 mm)	<b>IP 20</b>	

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

**Canopy:**

Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
<b>DB 290</b> Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	<b>B, D, E, F, H</b> (up to Ø 1800)	<b>IP 20</b>
<b>DB 350</b> Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	<b>B, H</b> (up to Ø 3500)	<b>IP 20</b>
<b>PB 366</b> Ø 90 H 366 mm / 3.5 x 14.4"	<b>S, T</b> (up to Ø 1320)	<b>IP 20</b>
<b>PB 656</b> Ø 90 H 656 mm / 3.5 x 25.8"	<b>S, T</b> (up to Ø 1800)	<b>IP 20</b>

**Colour: 12 white, similar RAL 9003**, contact factory for other finishes  
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Complete order number




### Optional



#### CASAMBI wall-switch

**207. 00. 00. 00. 12.** (white)  
**207. 00. 00. 00. 10** (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



#### Ceiling fixation for mounting version A

**200. 00. 00. 00. 12** (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F