
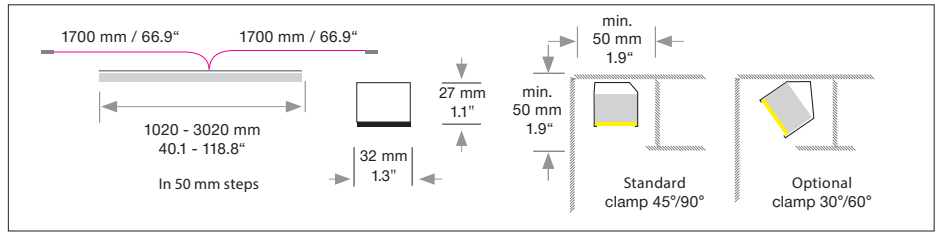


COVE LIGHTING

Housing: Aluminium profile with integrated diffuser
 Design: SATTLER

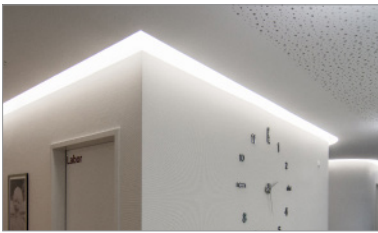

| Sizes | Size: L mm | Inches | LED Watt | Lumen ¹⁾ | Weight ²⁾ kg/lbs | Item No. | LED | Dimming | LED | Finish | Mounting version |
|-------|---------------------------|--------|----------|---------------------|-----------------------------|----------|------|---------|------|--------|------------------|
| | min. 1020 mm | 40.1" | 18 /m | 1172 / m | | 1180 | x x. | x x. | x x. | x x. | x x x. |
| | 1 part up to max. 3020 mm | | | | | | | | | | |

| | | | | | | | | | | | |
|-------------------------------|--|-----------|------------------|--------|----------|-----|------|------|------|--------|---|
| LED Direct 24V CRI > 90 | | Standard: | Warm-white | 3000 K | x x x x. | 30. | x x. | x x. | x x. | x x x. | x |
| | | Optional: | Neutral-white | 4000 K | x x x x. | 40. | x x. | x x. | x x. | x x x. | x |
| | | | Extra warm-white | 2700 K | x x x x. | 27. | x x. | x x. | x x. | x x x. | x |

| | | | | | | | | | |
|---------|--|------------------|----------|------|-----|-----|------|--------|---|
| Dimming | | DALI, switch Dim | x x x x. | x x. | 61. | 00. | x x. | x x x. | x |
|---------|--|------------------|----------|------|-----|-----|------|--------|---|

| | | | | | | | | | | |
|----------|--|------------------------|-----------------------------|----------------------------|----------|------|------|------|--------|---|
| Finishes | | Standard: 21 alu natur | Optional: 10 black RAL 9005 | 12 white, similar RAL 9003 | x x x x. | x x. | x x. | x x. | x x x. | x |
|----------|--|------------------------|-----------------------------|----------------------------|----------|------|------|------|--------|---|

| Mounting clam bracket-set 45°/90° or 30°/60° | | | | | | | | | | |
|--|--|-------------------|-----|----------|------|------|------|------|------|---|
| Clam 45°/90° | | Standard included | 904 | x x x x. | x x. | x x. | x x. | x x. | 904. | x |
| Clam 30°/60° | | Optional | 603 | x x x x. | x x. | x x. | x x. | x x. | 603. | x |

| | | | | | | | | | | |
|------------------|--|---|--|----------|------|------|------|------|--------|---|
| Mounting version | | 1020 - 3020 mm | Up to 8 m ready to plug in, incl. bracket-set. | x x x x. | x x. | x x. | x x. | x x. | x x x. | G |
| | Direct mounting with external power supply unit in suspended ceiling | Max. 8 m per power supply and group possible, several groups can be combined. | | 1180. | --- | 61. | 00. | --- | --- | G |

Complete order number

Canopy with power supply for connection of COVE LIGHTING
 Canopy not included, has to be ordered separately.



| | | | |
|--------------------|-----------------|----------------------|--|
| 60W up to 3000 mm | 277.00.00.00.00 | <input type="text"/> | Desired length, 1020 - 3020 mm Graduations in 50 mm steps are possible. |
| 100W up to 5000 mm | 278.00.00.00.00 | <input type="text"/> | Please specify the total length |
| 150W up to 8000 mm | 279.00.00.00.00 | <input type="text"/> | |

Input voltage for all external power supply units and canopy is 198-264 VAC 50/60 Hz


| | | | | |
|---|-----------------------------|--------------------------------------|--|--|
| Handcrafted in Germany, certified quality | Protective rating luminaire | Direct / indirect light distribution | Protection class III: only suitable for very low voltage supply (<50V) | Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F. |
|---|-----------------------------|--------------------------------------|--|--|

COVE LIGHTING



Housing: Aluminium profile with integrated diffuser
 Design: SATTLER

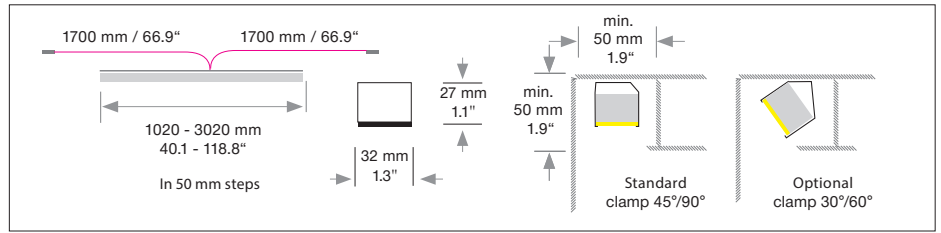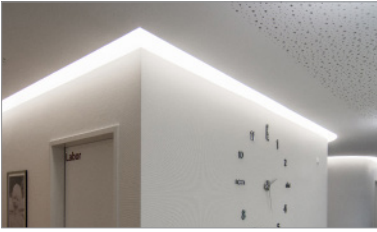


Application examples



Standard included: 904
 Mounting clam 45°/90°

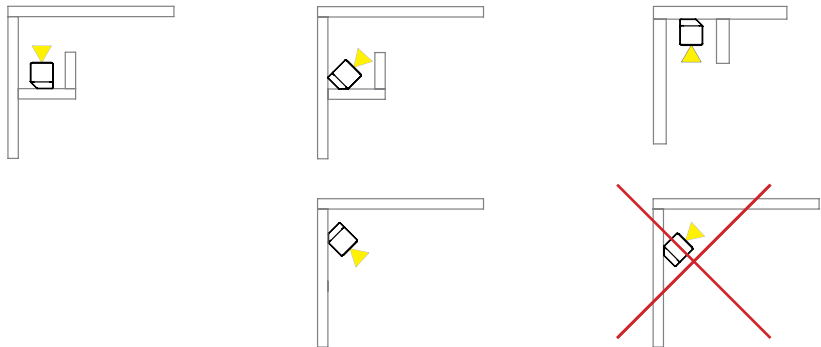

Optional: 603
 Mounting clam 30°/60°

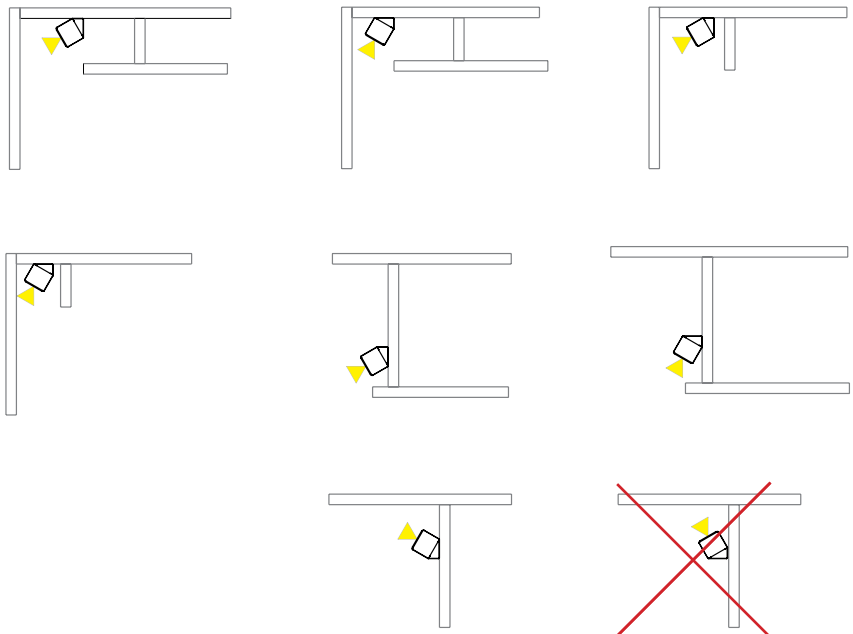

Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating luminaire



Direct / indirect light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.