









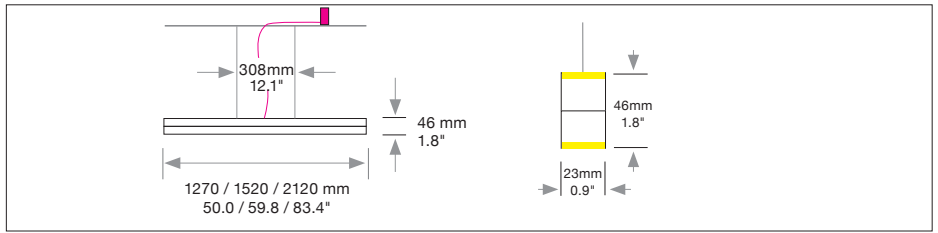





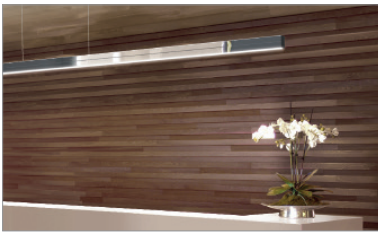















DOPPIO LINEA DIRECT / INDIRECT

Housing: Aluminium profile with integrated opal diffusers
Design: SATTLER





Size	Size: L x W mm	Inches	LED Watt direct / indirect	Lumen ¹⁾ direct / indirect	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Indirect 	1270 mm	50.0"	23 / 9	1.219 / 480	2.0 / 4.4	794.	X X .	X X .	X X .	X X .	X X X .	X
	1520 mm	59.8"	28 / 11	1.489 / 587	2.5 / 5.5	795.	X X .	X X .	X X .	X X .	X X X .	X
	2120 mm	83.4"	39 / 15	2.051 / 805	3.0 / 6.6	796.	X X .	X X .	X X .	X X .	X X X .	X
Single light, not mountable in row												
Direct 	Direct and indirect light are switchable and dimmable together only											
Direct LED 24V CRI > 90 	Standard:	Warm-white	3000 K	X X X .	30.	X X .	X X .	X X .	X X .	X X X .	X	
	Optional:	Neutral-white	4000 K	X X X .	40.	X X .	X X .	X X .	X X .	X X X .	X	
		Extra warm-white	2700 K	X X X .	27.	X X .	X X .	X X .	X X .	X X X .	X	
Indirect LED 24V CRI > 90 Indirect light is significantly weaker than direct light output  	Standard:	Warm-white	3000 K	X X X .	X X .	X X .	30.	X X .	X X .	X X X .	X	
	Optional:	Neutral-white	4000 K	X X X .	X X .	X X .	40.	X X .	X X .	X X X .	X	
		Extra warm-white	2700 K	X X X .	X X .	X X .	27.	X X .	X X .	X X X .	X	
		RGB colour control* up to 1520mm/ 59.8" and only in combination with dimming DMX, DALI, CASAMBI		X X X .	X X .	X X .	60.	X X .	X X .	X X X .	X	
Dimming 	Standard:	Without Dimmer		X X X .	X X .	02.	X X .	X X .	X X .	X X X .	X	
	Optional:	DMX		X X X .	X X .	32.	X X .	X X .	X X .	X X X .	X	
		1 - 10 V		X X X .	X X .	42.	X X .	X X .	X X .	X X X .	X	
		0 - 10 V		X X X .	X X .	52.	X X .	X X .	X X .	X X X .	X	
		DALI		X X X .	X X .	62.	X X .	X X .	X X .	X X X .	X	
	CASAMBI		X X X .	X X .	82.	X X .	X X .	X X .	X X X .	X		
	ENOCEAN wireless push button		X X X .	X X .	92.	X X .	X X .	X X .	X X .	X X X .	X	
	not in combination with mounting version E or F											
Finish Standard:		12	white, powder coated, similar RAL 9003									
		11	white, similar RAL 9010									
		10	black fine textured									
		30	anthracite fine textured									
		32	crocodile black									
		33	sand silver fine textured									
		34	bronze satined									
		35	gold									
		36	brass									
		37	bronze fine textured									
	38	copper										
		22	aluminium polished									
		27	brush-finished aluminium									
		XX	Custom finish	X X X .	X X .	X X .	X X .	X X .	X X .	X X X .	X	
Power supply cable Standard:		Z 70	Silver									
		Z 71	white									
		Z 72	grey									
		Z 73	black									
		Z 74	orange									
		Z 75	red									
		Z 76	green									
		000	Without power cable	X X X .	X X .	X X .	X X .	X X .	X X .	X X X .	X	
	Current-carrying F, R, T, K											




DOPPIO LINEA DIRECT / INDIRECT


Housing: Aluminium profile with integrated opal diffusers
Design: SATTLER

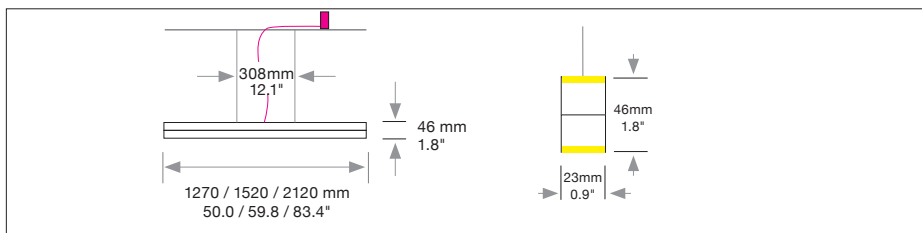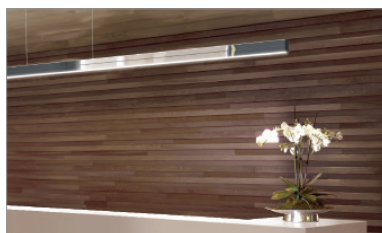


Mounting version




2-point suspension with external power supply unit in suspended ceiling



Suspension through canopy



Current-carrying steel cables. Not in combination with RGB



Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	- .

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm / 118.1"
or/and power supply cable 3000mm / 118.1"



---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply units:		Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
	DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,R	IP 20
In combination with RGB				
	DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3	A	IP 20

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Canopy:		Type/ Size mm / inch	For use with Mounting version	Protective rating
	DBL 390	L 390 x W 70 x H 70 mm L 15.4 x W 2.8 x H 2.8 mm	E, F	IP 10
In combination with RGB:				
	DBL 490	L 492 x W 70 x H 70 mm L 119.4 x W 2.8 x H 2.8 mm	E, F	IP 10
Colour: 12 white, similar RAL 9003, contact factory for other finishes				
USA/Canada: Canopy mounts to 4" octagonal junction box.				


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Ceiling fixation for mounting version A

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A..



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct / indirect light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.