

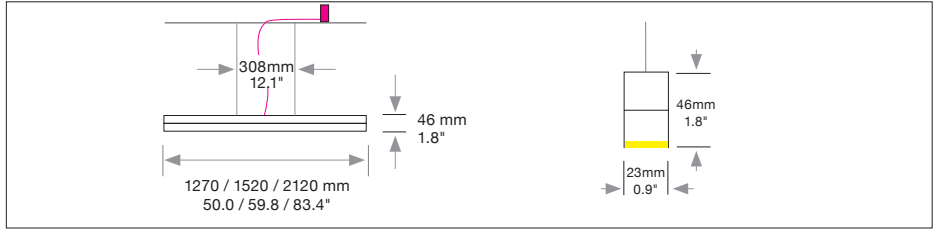


## DOPPIO LINEA Direct

Housing: Aluminium profile with integrated opal diffuser  
Design: SATTLER




Sizes	Size: Length mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	1270 mm	50.0"	23	1.219	2.0 / 4.4	<b>794.</b>	x x .	x x .	x x .	x x .	x x x .	x
	1520 mm	59.8"	28	1.489	2.5 / 5.5	<b>795.</b>	x x .	x x .	x x .	x x .	x x x .	x
	2120 mm	83.4"	39	2.051	3.0 / 6.6	<b>796.</b>	x x .	x x .	x x .	x x .	x x x .	x
<p>Direct</p> <p><b>Single lamp, not mountable in row</b></p>												
<b>LED</b> 24V CRI > 90		<b>Standard:</b> Warm-white	<b>3000 K</b>	x x x .	<b>30.</b>	x x .	x x .	x x .	x x .	x x x .	x	
		<b>Optional:</b> Neutral-white	4000 K	x x x .	<b>40.</b>	x x .	x x .	x x .	x x .	x x x .	x	
		Extra warm-white	2700 K	x x x .	<b>27.</b>	x x .	x x .	x x .	x x .	x x x .	x	
		Tunable white	2700 - 6500 K only in combination with dimming DMX, DALI, CASAMBI	x x x .	<b>80.</b>	x x .	x x .	x x .	x x .	x x x .	x	
<b>Dimming</b>		<b>Standard:</b> Without Dimmer		x x x .	x x .	<b>01.</b>	<b>00.</b>	x x .	x x x .	x		
		<b>Optional:</b> DMX		x x x .	x x .	<b>31.</b>	<b>00.</b>	x x .	x x x .	x		
		1 - 10 V		x x x .	x x .	<b>41.</b>	<b>00.</b>	x x .	x x x .	x		
		0 - 10 V		x x x .	x x .	<b>51.</b>	<b>00.</b>	x x .	x x x .	x		
		DALI		x x x .	x x .	<b>61.</b>	<b>00.</b>	x x .	x x x .	x		
		CASAMBI		x x x .	x x .	<b>81.</b>	<b>00.</b>	x x .	x x x .	x		
		ENOCEAN wireless push button		x x x .	x x .	<b>91.</b>	<b>00.</b>	x x .	x x x .	x		
		*(not in combination with Mounting version E or F)										
<b>Finish</b>		<b>Standard:</b> 12 white, powder coated, similar RAL 9003	<b>Optional (Powder coated):</b>	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	32 crocodile black	33 sand silver fine textured				
				34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper				
			<b>Optional (Premium):</b>	22* aluminium polished	27* brush-finished aluminium	*22, 27 Ring aluminium polished or brush-finished Top cover black	XX Custom finish					
<b>Power supply cable</b>		<b>Standard:</b> Z 70 Silver	<b>Optional:</b>	Z 71 white	Z 72 grey	Z 73 black						
				Z 74 orange	Z 75 red	Z 76 green	Without power cable					
							000 Current-carrying F, R, T, K					




## DOPPIO LINEA Direct


Housing: Aluminium profile with integrated opal diffuser  
Design: SATTLER

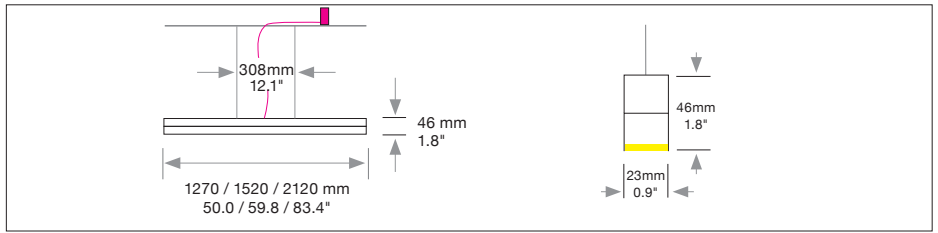


### Mounting version




2-point suspension with external power supply unit in suspended ceiling



suspension through canopy.



current-carrying steel cables. Not in combination with RGB.



Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm / 118.1"  
or/and power supply cable 3000mm / 118.1"



---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

**Power supply units:**

Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
<b>DE 1F</b> 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>A,R</b>	<b>IP 20</b>

**Canopy:**

Type / Size mm / inch	For use with Mounting version	Protective rating
<b>DBL 390</b> L 390 x W 70 x H 70 mm	<b>F, E</b>	<b>IP 10</b>

**Colour: 12 white, similar RAL 9003,**  
contact factory for other finishes

USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**


### Optional



#### CASAMBI wall-switch

**207. 00. 00. 00. 12.** ( white )  
**207. 00. 00. 00. 10.** ( black )

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



#### Ceiling fixation for mounting version A

**200. 00. 00. 00. 12.** ( white )

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.

