




GIRATA Horizontal

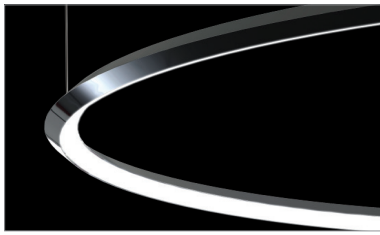


Housing: Aluminium profile bent inwards 45°. Integrated opal diffuser
Design: MARKUS BISCHOF

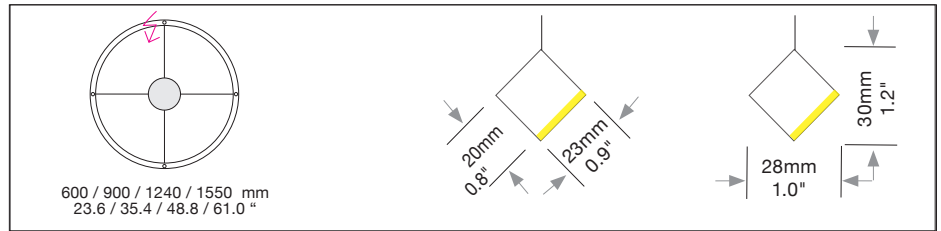


Mounting version




up to Ø 1550 mm
4-point suspension
with external power supply
unit in suspended ceiling




up to Ø 1550 mm
4-point suspension
with external power supply
unit in separate canopy




suspension through canopy




4 current-carrying steel
cables. Not in combination
with RGB




Suspension with current-
carrying steel cables and
cavity wall box. Not in
combination with RGB.



Suspension with pendant
canopy PB 366
and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



Suspension with pendant
canopy PB 366 and current-
carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Suspension point as
clamping unit with 4 cables
and remote technical unit in
suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

-	-	-	-	-	-	-
---	---	---	---	---	---	---

Complete order number

A, B, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"

Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, R, KIP 20	

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
DB 230 Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (up to Ø 900 mm)	IP 20
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F (up to Ø 1550 mm)	IP 20
PB 366 Ø 90 H 366 mm / 3.5 x 14.4"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Ø body 90 mm / 3.5"

Optional




CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)



Ceiling fixation for mounting version A

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.

200. 00. 00. 00. 12 (white)



Handcrafted in
Germany,
certified quality



Conforms to
UL-STD 1598
Certified to
CSA-STD C22.2
No.250.0-08



Protective rating
of luminaire



Direct
light distribution



Protection class III:
only suitable for very low
voltage supply (<50V)



Luminaires are suitable for mounting
on ordinary flammable materials,
which have an inflammation point of
at least 200° C. / 392° F.