
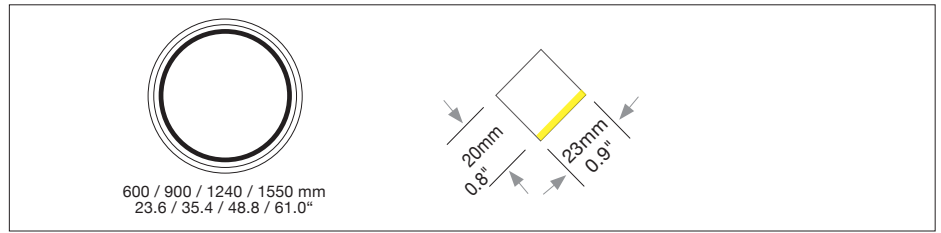


## GIRATA

### Vertical

Housing: Circular aluminium profile bent inwards 45°. Integrated opal diffuser.  
 Design: MARKUS BISCHOF

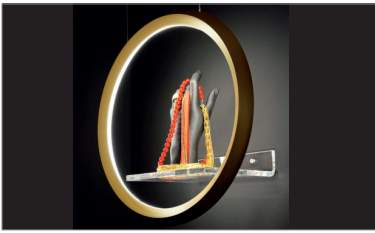

Size: Ø mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Ø 600 mm	23.6"	32	1.894	3.0 / 6.6	<b>901.</b>	x x .	x x .	x x .	x x .	x x x .	x
Ø 900 mm	35.4"	54	3.178	3.5 / 7.7	<b>902.</b>	x x .	x x .	x x .	x x .	x x x .	x
Ø 1240 mm	48.8"	70	4.104	5.0 / 11.0	<b>903.</b>	x x .	x x .	x x .	x x .	x x x .	x
Ø 1550 mm	61.0"	89	5.190	5.5 / 12.1	<b>904.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>LED</b> 24V CRI > 90		<b>Standard:</b> Warm-white	3000 K		x x x .	<b>30.</b>	x x .	x x .	x x .	x x x .	x
		<b>Optional:</b> Neutral-white Extra warm-white	4000 K 2700 K		x x x . x x x .	<b>40. 27.</b>	x x . x x .	x x . x x .	x x . x x .	x x x . x x x .	x x
<b>Dimming</b>		<b>Standard:</b> Without Dimmer			x x x .	x x .	<b>01.</b>	<b>00.</b>	x x .	x x x .	x
		<b>Optional:</b> DMX 1 - 10 V 0 - 10 V DALI CASAMBI  ENOCEAN wireless push button not in combination with mounting version E or F			x x x . x x x . x x x . x x x . x x x .	x x . x x . x x . x x . x x .	<b>31. 41. 51. 61. 81.</b>	<b>00. 00. 00. 00. 00.</b>	x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x .	x x x x x
<b>Finish</b>	Standard: <b>12</b> white, powder coated, similar RAL 9003	Optional (Powder coated):	<b>11</b> white, similar RAL 9010	<b>10</b> black fine textured	<b>30</b> anthracite fine textured	<b>32</b> crocodile black	<b>33</b> sand silver fine textured				
			<b>34</b> bronze satined	<b>35</b> gold	<b>36</b> brass	<b>37</b> bronze fine textured	<b>38</b> copper				
		Optional (Premium):	<b>22</b> aluminium polished	<b>27</b> brush-finished aluminium	<b>XX</b> Custom finish						
<b>Power supply cable</b>	Standard: <b>Z 70</b> Silver	Optional:	<b>Z 71</b> white	<b>Z 72</b> grey	<b>Z 73</b> black	Without power cable					
			<b>Z 74</b> orange	<b>Z 75</b> red	<b>Z 76</b> green	<b>000</b> Current-carrying F, R		x x x .	x x .	x x .	x x .



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards





Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

## GIRATA Vertical


Housing: Circular aluminium profile bent inwards 45°. Integrated opal diffuser.  
Design: MARKUS BISCHOF

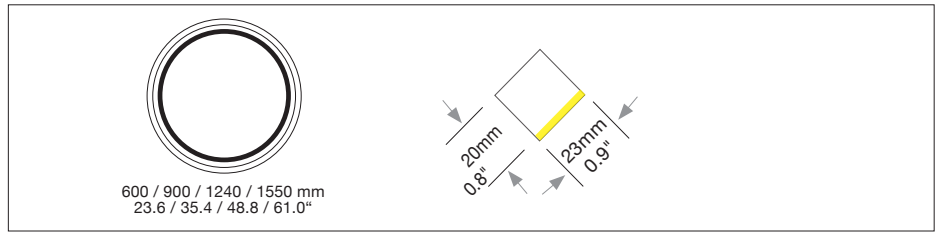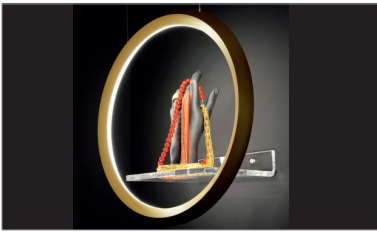


### Mounting version




2 point suspension, with external power supply unit in suspended ceiling



Suspension through canopy



Current-carrying steel cables.



Suspension with current-carrying steel cables and cavity wall box.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, R = Distance of external power supply unit to light fixture max. 10m / 394".

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118"



---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply unit:			
Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating	
<b>DE 1F</b> 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>A,R</b>	<b>IP 20</b>	

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Canopy:			
Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating	
<b>DBL 390</b> L 390 x B 70 x H 70 mm L 15.3 x B 2.7 x H 2.7"	<b>E, F</b> (up to Ø 1240 mm)	<b>IP 10</b>	
<b>DBL 490</b> L 490 x B 70 x H 70 mm L 19.4 x B 2.7 x H 2.7"	<b>E, F</b> (up to Ø 1240 mm)	<b>IP 10</b>	

**Colour: 12 white, similar RAL 9003**, contact factory for other finishes  
USA/Canada: Canopy mounts to 4" octagonal junction box.


### Optional



#### CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

**207. 00. 00. 00. 12.** (white)  
**207. 00. 00. 00. 10** (black)



#### Ceiling fixation for mounting version A

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.

**200. 00. 00. 00. 12** (white)

