
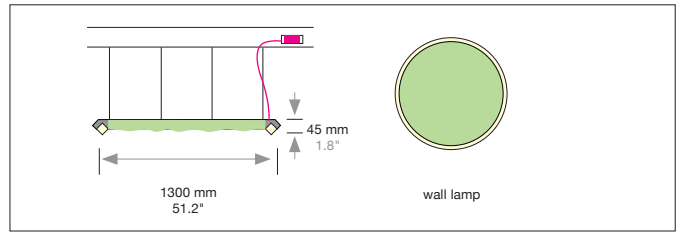



LUCE VERDE SLIM




Housing: Aluminium-profile with integrated acrylic glass. Inner surface made of dried moss.
 Design: SATTLER

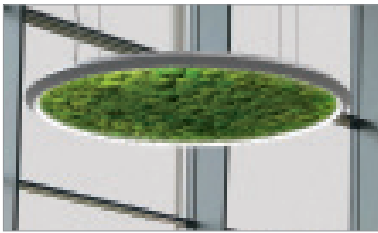


Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version																	
Sizes																												
Luce Verde SLIM																												
Ø 1300 x 45	51.2 x 1.8"	70	4.112	24 / 52.9	790.	x x .	x x .	x x .	x x .	x x x .	x																	
Luce Verde SLIM WALL																												
Ø 1300 x 45	51.2 x 1.8"	70	4.112	24 / 52.9	791.	x x .	x x .	x x .	x x .	x x x .	x																	
LED																												
24V		Standard:	Neutral-white	4000 K	x x x .	40.	x x .	x x .	x x .	x x x .	x																	
CRI > 90		Optional:	Warm-white	3000 K	x x x .	30.	x x .	x x .	x x .	x x x .	x																	
			Extra warm-white	2700 K	x x x .	27.	x x .	x x .	x x .	x x x .	x																	
Dimming																												
		Standard:	Without Dimmer		x x x .	x x .	01.	x x .	x x .	x x x .	x																	
		Optional:	DMX		x x x .	x x .	31.	x x .	x x .	x x x .	x																	
			1 - 10 V		x x x .	x x .	41.	x x .	x x .	x x x .	x																	
			0 - 10 V		x x x .	x x .	51.	x x .	x x .	x x x .	x																	
			DALI		x x x .	x x .	61.	x x .	x x .	x x x .	x																	
			CASAMBI		x x x .	x x .	81.	x x .	x x .	x x x .	x																	
			ENOCEAN wireless push button		x x x .	x x .	91.	x x .	x x .	x x x .	x																	
Finish																												
Standard:		12	white, powder coated, similar RAL 9003		30	anthracite fine textured		XX	Custom finish	x x x .	x x .	x x .	x x .	---	x x x .	x												
		Optional (Powder coated):																										
Power supply cable																												
Standard:		Z 70	Silver		Z 71	white		Z 72	grey		Z 73	black		Z 74	orange		Z 75	red		Z 76	green	x x x .	x x .	x x .	x x .	x x .	---	x
		Optional:																										

LUCE VERDE SLIM



Housing: Aluminium-profile with integrated acrylic glass. Inner surface made of dried moss.
Design: SATTLER

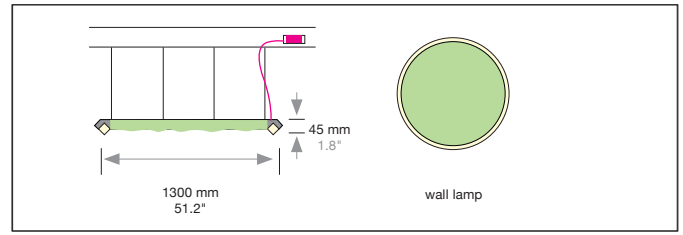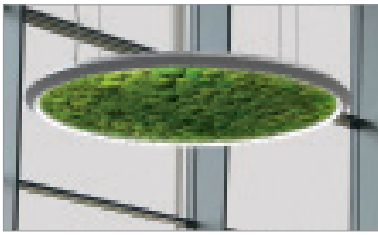

Mounting Version



4-point suspension with canopy or canopy in suspended ceiling



Wall lamp incl. 2 wall hooks for fixing and external power supply unit in false wall



Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-


B, W = Distance of external power supply unit to light fixture max. 10m / 394"

Min. suspension height 90 mm


Including steel cable suspension 5000mm / 197"
and power supply cable 5000mm / 197"

---	---	---	---	---	---	---
-----	-----	-----	-----	-----	-----	-----

Complete order number

Power supply unit: (1 LED Stripe)	Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
	DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	W	IP 20

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Canopy: (1 LED Stripe)	Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
	DBS 250 Ø 250 / 50 mm / 9.8 / 1.9"	B	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Zur effektvollen Beleuchtung des Trockenmooses empfehlen wir den Einsatz separater Spots.

For effective illumination of dried moss we recommend the use of separate spotlights.

Da es sich beim verwendeten Moos um ein Naturprodukt handelt, kann es zu Verfärbungen und Ausbleichen kommen. Dies ist insbesondere bei erhöhter UV-Strahlung möglich. Daher sind Verfärbungen und Ausbleichen als Reklamationsgründe ausgeschlossen.

Since the moss is a natural product, discoloration and fading can occur. This is especially possible with increased UV radiation. Therefore, discoloration and fading are excluded as reasons for complaint.

Für ein lang andauerndes Gesamtbild beachten Sie bitte folgende Pflegehinweise:

Moos darf nicht gegossen oder mit Wasser besprüht werden • Zur Säuberung kann ein sanfter Luftstrahl verwendet werden • Bei zusätzlicher Beleuchtung Leuchtmittel ohne UV-Anteil verwenden • Luftfeuchte über 70% vermeiden • Moos vor extremer Hitze und Frost schützen

To preserve the appearance of the moss, please follow subsequent care instructions:

do not pour or spray water on moss • a gentle stream of air can be used for cleaning • use lamps without UV rays for additional lighting • avoid humidity of more than 70% • protect the moss from extreme heat or frost.

Optional


CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)



Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Ceiling fixation for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

IP 20 Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.