
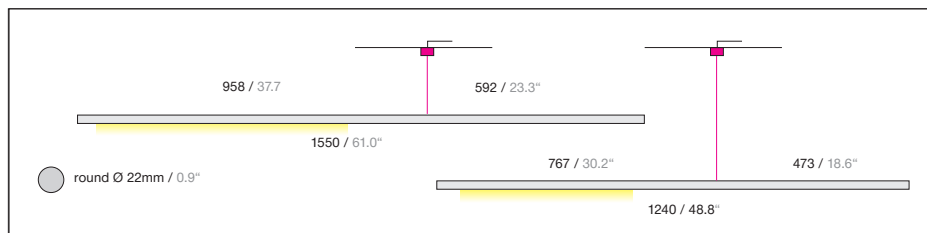


## PALITO

Housing: Pendant light, solid aluminium housing  
 Design: Ulrich Sattler | Michael Schmidt, Code2design

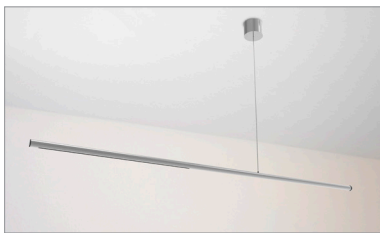

	Size: Ø / L mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
<b>SIZE</b>	Ø 22 / L 1240 mm	Ø 0.9 / L 48.8"	15	1.514	1,4 / 3.1	<b>1541.</b>	x x.	x x.	x x.	x x.	x x x.	x
	Ø 22 / L 1550 mm	Ø 0.9 / L 61.0"	22	2.270	2,0 / 4,4	<b>1542.</b>	x x.	x x.	x x.	x x.	x x x.	x
<b>LED</b> 36V CRI > 90		<b>Standard:</b> Warm-white	<b>3000 K</b>			x x x.	<b>30.</b>	x x.	x x.	x x.	x x x.	x
		<b>Optional:</b> Neutral-white Extra warm-white	4000 K 2700 K			x x x. x x x.	<b>40. 27.</b>	x x. x x.	x x. x x.	x x. x x.	x x x. x x x.	x x
<b>Dimming</b>			<b>Sensordimmer</b>			x x x.	x x.	<b>21. 00.</b>	x x.	x x x.	x	
<b>Finish</b>			<b>Standard:</b> 66 bronze anodised brushed		<b>Optional:</b> 22 aluminium polished, 62 black anodised brushed, 65 champ. gold anodised brushed	x x x.	x x.	x x.	x x.	.	x x x.	x
<b>Power supply cable</b>			<b>Z 80</b> Black			x x x.	x x.	x x.	x x.	x x.	<b>Z80.</b>	x
<b>Mounting version</b>			<b>F</b> Height adjustable on canopy <b>Standard</b>			x x x.	x x.	x x.	x x.	x x.	x x x.	<b>F</b>
			<b>R</b> Ceiling cutout Ø 68 mm / 2.7"			x x x.	x x.	x x.	x x.	x x.	x x x.	<b>R</b>

**Canopy:**

Type Size mm / inch


**DB 90/94** **Mounting version F (Standard)**  
 Ø 90 / H 94 mm / 3.5 x 2.0"  
 Colour black (10), white on request

**DA 80** **Mounting version R, Ceiling cutout Ø 68 mm / 2.7"**  
**Cover Ø 80 mm 3.1", installation depth 80 mm / 3.1"**  
 Colour white (12), similar RAL 9003

**Input voltage for all external power supply units and canopy is 90-277 VAC 47-63 Hz.**

x x x.	x x.	<b>21. 00.</b>	x x.	<b>Z80.</b>	x
--------	------	----------------	------	-------------	---

**Complete order number**



Die Leuchte besitzt durch die asymmetrische Einzelpunktabhängung einen gewollten Bewegungsspielraum, welcher kurzzeitige Positionsänderungen von bis zu 15 – 20 Grad in horizontaler und vertikaler Richtung beinhalten kann. Auslöser hierfür können äußere Einflüsse, wie z.B. sehr starkem Luftzug und leichten Berührungen sein.

Due to the asymmetrical single point suspension, the luminaire has a desired freedom of movement which may include short-term rotation of the luminaire body by up to 15 - 20 degrees in horizontal and vertical direction caused by external influences such as strong draughts and light touches.

Leuchte lässt sich mittels Rändelschraube am verstellbaren Gegen- gewicht grob in die gewünschte Position bringen.

Luminaire can be broadly adjusted to the desired position by means of a knurled screw with a counter weight.

