


SLIM DIRECT

Housing: Circular aluminium profile with integrated opal diffuser
 Design: SATTLER

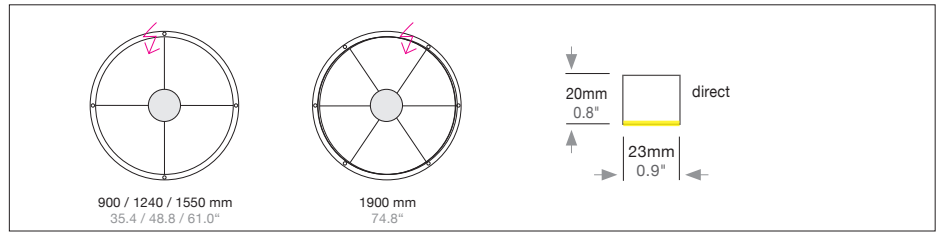


Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
Ø 380 mm	15.0"	22	1.269	2.5 / 5.5	709.	X X.	X X.	X X.	X X.	X X X.	X
Ø 600 mm	23.6"	32	2.192	3.0 / 6.6	710.	X X.	X X.	X X.	X X.	X X X.	X
Ø 900 mm	35.4"	54	3.196	3.5 / 7.7	711.	X X.	X X.	X X.	X X.	X X X.	X
Ø 1240 mm	48.8"	70	4.053	5.0 / 11.0	712.	X X.	X X.	X X.	X X.	X X X.	X
Ø 1550 mm	61.0"	89	5.208	5.5 / 12.1	713.	X X.	X X.	X X.	X X.	X X X.	X
Ø 1900 mm	74.8"	107	6.337	6.0 / 13.2	714.	X X.	X X.	X X.	X X.	X X X.	X
LED 24V CRI > 90		Standard: Warm-white 3000 K			X X X.	30.	X X.	X X.	X X.	X X X.	X
		Optional: Neutral-white 4000 K			X X X.	40.	X X.	X X.	X X.	X X X.	X
		Extra warm-white 2700 K			X X X.	27.	X X.	X X.	X X.	X X X.	X
		Tunable white* 2700 - 6500 K			X X X.	80.	X X.	X X.	X X.	X X X.	X
		RGB colour control*			X X X.	60.	X X.	00.	X X.	X X X.	X
		*only in combination with dimming DMX, DALI, CASAMBI									
Dimming		Standard: Without Dimmer			X X X.	X X.	01.	00.	X X.	X X X.	X
		Optional: DMX 1 - 10 V			X X X.	X X.	31.	00.	X X.	X X X.	X
		0 - 10 V			X X X.	X X.	41.	00.	X X.	X X X.	X
		DALI			X X X.	X X.	51.	00.	X X.	X X X.	X
		CASAMBI			X X X.	X X.	61.	00.	X X.	X X X.	X
		ENOCEAN wireless push button not in combination with mounting version E or F			X X X.	X X.	81.	00.	X X.	X X X.	X
					X X X.	X X.	91.	00.	X X.	X X X.	X
Finish		Standard:									
		Optional (Powder coated):									
		12 white, powder coated, similar RAL 9003									
		11 white, similar RAL 9010									
		10 black fine textured									
		30 anthracite fine textured									
		32 crocodile black									
		33 sand silver fine textured									
		34 bronze satined									
		35 gold									
		36 brass									
		37 bronze fine textured									
		38 copper									
		Optional (Premium):									
		22 aluminium polished			X X X.	X X.	X X.	X X.	--	X X X.	X
		27 brush-finished aluminium									
		XX Custom finish									
Power supply cable		Standard:									
		Optional:									
		000 Without power cable									
		Z 70 Silver									
		Z 71 white									
		Z 72 grey									
		Z 73 black									
		Z 74 orange			X X X.	X X.	X X.	X X.	X X.	--	X
		Z 75 red									
		Z 76 green									


Handcrafted in Germany, certified quality
 Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08
 Protective rating of luminaire
 Direct light distribution
 Protection class III: only suitable for very low voltage supply (<50V)
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

SLIM DIRECT


Housing: Circular aluminium profile with integrated opal diffuser
 Design: SATTLER

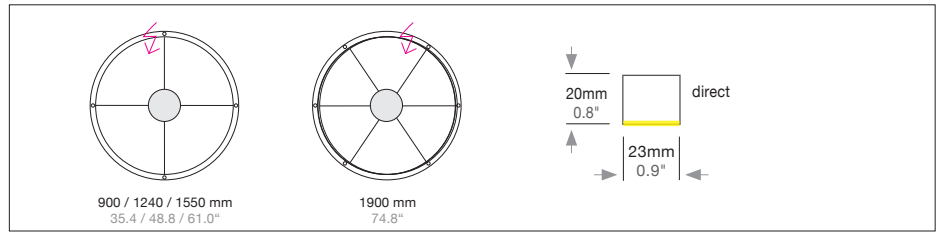


Mounting version




up to Ø 1550 mm / 61.0"
 4-point suspension
 Ø 1900 mm / 74.8"
 6-point suspension with external power supply unit in suspended ceiling




up to Ø 1550 mm / 61.0"
 4-point suspension
 Ø 1900 mm / 74.8"
 6-point suspension with external power supply unit in separate canopy




suspension through canopy




4/6 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




Suspension with pendant canopy PB 366 and steel cables
 (a) 5000 mm / 196.8" +
 (b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables.
 (a) 5000 mm / 196.8" +
 (b) 3000 mm / 118.1"
 Not in combination with RGB.



Direct ceiling mounting
 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4/6 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

-	-	-	-	-	-	-
---	---	---	---	---	---	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"

Power supply unit:

Type / Size mm / inch	For use with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,G,R,K	IP 20

Input voltage for all external power supply units and canopy is 90-277 VAC 47-63 Hz

Canopy:

Type / Size mm / inch	For use with Mounting version	Protective rating
DB 230 Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (up to Ø 900 mm)	IP 20
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F (up to Ø 1550 mm)	IP 20
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F (up to Ø 1900 mm)	IP 20
PB 366 Ø 90 H 366 mm / 3.5 x 14.4"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional




CASAMBI wall-switch

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Ceiling fixation for mounting version A, G

200. 00. 00. 00. 12. (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A., G.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.