


SLIM OUT

Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER





Luminaire similar to photo

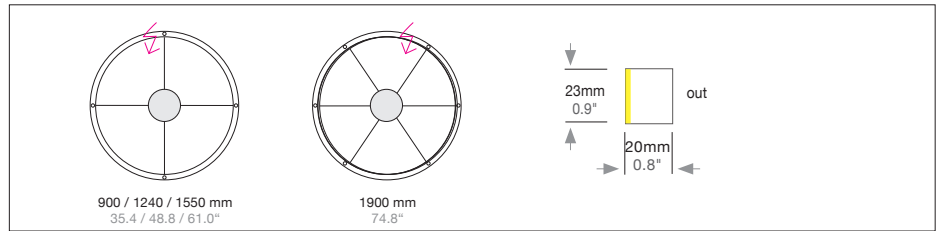

Size: Ø mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version									
Ø 900 mm	35.4"	51	2.935	3.5 / 7.7	723.	x x .	x x .	x x .	x x .	x x x .	x									
Ø 1240 mm	48.8"	71	4.186	5.0 / 11.0	724.	x x .	x x .	x x .	x x .	x x x .	x									
Ø 1550 mm	61.0"	88	5.243	5.5 / 12.1	725.	x x .	x x .	x x .	x x .	x x x .	x									
Ø 1900 mm	74.8"	108	6.414	6.0 / 13.2	726.	x x .	x x .	x x .	x x .	x x x .	x									
LED 24V CRI > 90		Standard: Warm-white	3000 K		x x x .	30.	x x .	x x .	x x .	x x x .	x									
		Optional:	Neutral-white	4000 K		x x x .	40.	x x .	x x .	x x .	x x x .	x								
			Extra warm-white	2700 K		x x x .	27.	x x .	x x .	x x .	x x x .	x								
			Tunable white* RGB colour control*	2700 - 6500 K		x x x . x x x .	80. 60.	x x . x x .	x x . 00.	x x . x x .	x x x . x x x .	x x								
*only in combination with dimming DMX , DALI, CASAMBI																				
Dimming		Standard: Without Dimmer			x x x .	x x .	01.	00.	x x .	x x x .	x									
		Optional:	DMX 1 - 10 V 0 - 10 V DALI CASAMBI ENOCEAN wireless push button			x x x . x x x . x x x . x x x . x x x . x x x .	x x . x x . x x . x x . x x . x x .	31. 41. 51. 61. 81. 91.	00. 00. 00. 00. 00. 00.	x x . x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x . x x x .	x x x x x x								
Finish	Standard:	12 white, powder coated, similar RAL 9003	Optional (Powder coated):					22 aluminium polished	27 brush-finished aluminium	XX Custom finish	x x x .	x x .	x x .	x x .	--	x x x .	x			
		11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	32 crocodile black	33 sand silver fine textured	34 bronze satined											35 gold	36 brass	37 bronze fine textured
Power supply cable	Standard:	Without power cable 000 Current-carrying F, R, T, K	Optional:					Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black	Z 74 orange	Z 75 red	Z 76 green	x x x .	x x .	x x .	x x .	--	x
		Z 77 blue																		



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08




SLIM OUT


Housing: Aluminium profile with integrated opal diffuser
Design: SATTLER




Luminaire similar to photo

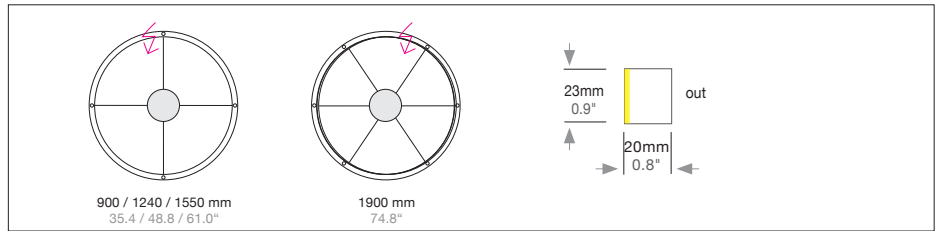


Mounting version




up to Ø 1550 mm / 61.0"
4-point suspension
1900 mm / 74.8"
6-point suspension with external power supply unit in suspended ceiling




up to Ø 1550 mm / 61.0"
4-point suspension
1900 mm / 74.8"
6-point suspension with external power supply unit in separate canopy




suspension through canopy




4/6 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




Suspension with pendant canopy PB 366 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting
50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

-	-	-	-	-	-	-
---	---	---	---	---	---	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118" and/or power supply cable 3000mm/118" version S,T 5000 + 3000mm / 197"+118"

Power supply unit:

Type / Size mm / inch	For use with Mounting version	Protective rating
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,G,R,K	IP 20

Input voltage for all external power supply units and canopy is 90-277 VAC 47-63 Hz

Canopy:

Type / Size mm / inch	For use with Mounting version	Protective rating
DB 230 Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	B, E, F (up to Ø 900 mm)	IP 20
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F (up to Ø 1550 mm)	IP 20
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F (up to Ø 1900 mm)	IP 20
PB 366 Ø 90 H 366 mm / 3.5 x 14.4"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional




CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10. (black)



Ceiling fixation for mounting version A, G

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A., G.

200. 00. 00. 00. 12. (white)



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250-08



Protective rating of luminaire



Light distribution outwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.