


SOFT DELTA LIGHT + ACOUSTIC

Housing: Aluminium profile with integrated opal diffuser and fabric covering as a light and acoustic diffuser.
Design: SATTLER



	Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
Sizes	1340 x 1309 x 80	52.7 x 51.5 x 3.1	83	5.427	14 / 30.0	850.	x x.	x x.	x x.	x x.	x x x.	x
	1735 x 1717 x 80	68.3 x 67.5 x 3.1	106	7.003	17 / 37.5	862.	x x.	x x.	x x.	x x.	x x x.	x
LED 24V CRI > 90		Standard: Neutral-white Optional: Warm-white Extra warm-white Tunable white* RGB colour control* RGB + Neutral-White*	4000 K 3000 K 2700 K 2700 - 6500 K 4000 K	x x x. x x x. x x x. x x x. x x x.	40. 30. 27. 80. 60. 60.	x x. x x. x x. x x. x x.	01. 31. 41. 51. 61. 81. 91.	00. 00. 00. 00. 00. 00. 00.	x x. x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x x	
Dimming		Standard: Without Dimmer Optional: DMX 1 - 10 V 0 - 10 V DALI CASAMBI ENOCEAN wireless push button		x x x. x x x. x x x. x x x. x x x. x x x.	x x. x x. x x. x x. x x. x x.	01. 31. 41. 51. 61. 81. 91.	00. 00. 00. 00. 00. 00. 00.	x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x x		
Finish		Standard: 12 white, powder coated, similar RAL 9003 Optional (Powder coated): 11 white, similar RAL 9010 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper Optional (Premium): 22 aluminium polished 27 brush-finished aluminium 44 wood veneer, white borders XX Custom finish		x x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	00. 00. 00. 00. 00. 00. 00. 00. 00. 00.	x x. x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x x x x x			
Power supply cable		Standard: Z 70 Silver Optional: Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green 000 Without power cable Current-carrying F, R, T, K		x x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x. x x.	00. 00. 00. 00. 00. 00. 00. 00. 00.	x x. x x. x x. x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x x x x			

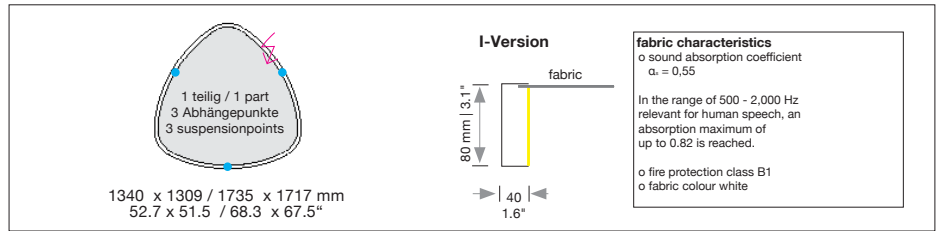

Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards




Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

SOFT DELTA LIGHT + ACOUSTIC


Housing: Aluminium profile with integrated opal diffuser and fabric covering as a light and acoustic diffuser.
Design: SATTLER

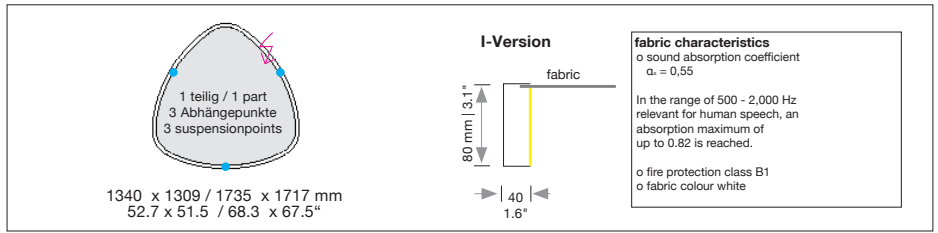


Mounting Version




3-point suspension with external power supply unit in suspended ceiling




3-point suspension with external power supply unit in separate canopy




3 steel cables. suspension through canopy




3 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Suspension with 3 current-carrying steel cables and cavity wall box. Not in connection with RGB.




Suspension with pendant canopy PB 366 and **3 steel cables**
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and **3 current-carrying steel cables.**
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting 3 points
(white) 50mm / 1.9" with external power supply unit in



Direct ceiling mounting 3 points
(white) 50mm / 1.9" with external power supply unit in



Suspension point as clamping unit with 3 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, R, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

Complete order number

Power supply unit: (1 LED Stripe)		Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
	DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,G,R,K	IP 20

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Canopy: (1 LED Stripe)		Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
	DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (size 1340x1309)	IP 20
	DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (size 1735x1717)	IP 20
	PB 366	Ø 90 H 366 mm / 3.5 x 14.4"	S, T	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.


Optional



CASAMBI wall-switch

207. 00. 00. 00. 12 (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



Ceiling fixation for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F