


SOFT QUADRA

Housing: Aluminium profile, integrated (I) or L-shaped opal diffuser (L)
 Design: SATTLER



Sizes	Size: L x W x H mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version			
I-Version	1250 x 1250 x 80	49.2 x 49.2 x 3.1	88	5.873	15 / 33.1	801. 813.	X X.	X X.	X X.	X X.	X X X.	X			
	1694 x 1694 x 80	66.7 x 66.7 x 3.1	118	7.951	17 / 37.5		X X.	X X.	X X.	X X.	X X X.	X			
L-Version	1250 x 1250 x 107	49.2 x 49.2 x 4.2	88	6.336	15 / 33.1	800. 812.	X X.	X X.	X X.	X X.	X X X.	X			
	1694 x 1694 x 107	66.7 x 66.7 x 4.2	118	8.556	17 / 37.5		X X.	X X.	X X.	X X.	X X X.	X			
LED 24V CRI > 90		Standard: Neutral-white	4000 K		X X X.	40.	X X.	X X.	X X.	X X X.	X				
		Optional:	Warm-white	3000 K		X X X.	30.	X X.	X X.	X X.	X X X.	X			
			Extra warm-white	2700 K		X X X.	27.	X X.	X X.	X X.	X X X.	X			
			Tunable white*	2700 - 6500 K		X X X.	80.	X X.	X X.	X X.	X X X.	X			
			RGB colour control*			X X X.	60.	X X.	00.	X X.	X X X.	X			
		RGB + Neutral-White*	4000 K		X X X.	60.	X X.	40.	X X.	X X X.	X				
*only in combination with dimming DMX, DALI, CASAMBI) Combinations up to two stripes of LED possible															
Dimming		Standard: Without Dimmer			X X X.	X X.	01.	00.	X X.	X X X.	X				
		Optional:	DMX			X X X.	X X.	31.	00.	X X.	X X X.	X			
			1 - 10 V			X X X.	X X.	41.	00.	X X.	X X X.	X			
			0 - 10 V			X X X.	X X.	51.	00.	X X.	X X X.	X			
			DALI			X X X.	X X.	61.	00.	X X.	X X X.	X			
CASAMBI			X X X.	X X.	81.	00.	X X.	X X X.	X						
ENOCEAN wireless push button			X X X.	X X.	91.	00.	X X.	X X X.	X						
Finish		Standard: 12 white, powder coated, similar RAL 9003			X X X.	X X.	X X.	X X.	X X.	X X X.	X				
		Optional (Powder coated):	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	32 crocodile black	33 sand silver fine textured	X X X.	X X.	X X.	X X.	X X X.	X		
			34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper	X X X.	X X.	X X.	X X.	X X X.	X		
			Optional (Premium):	22 aluminium polished	27 brush-finished aluminium	44 wood veneer, white borders	XX Custom finish	X X X.	X X.	X X.	X X.	X X X.	X		
									X X X.	X X.	X X.	X X.	X X X.	X	
									X X X.	X X.	X X.	X X.	X X X.	X	
			Power supply cable		Standard: Z 70 Silver			X X X.	X X.	X X.	X X.	X X.	X X X.	X	
					Optional:	Z 71 white	Z 72 grey	Z 73 black			X X X.	X X.	X X.	X X.	X
						Z 74 orange	Z 75 red	Z 76 green			X X X.	X X.	X X.	X X.	X
		Without power cable								X X X.	X X.	X X.	X X.	X	
000 Current-carrying F, R, T, K								X X X.	X X.	X X.	X X.	X			
						X X X.	X X.	X X.	X X.	X X X.	X				

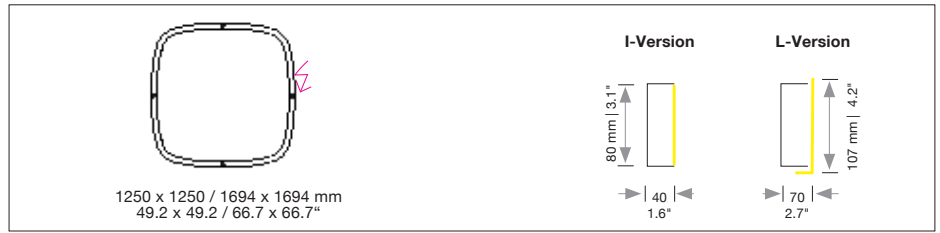

Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Light distribution inwards




Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F

SOFT QUADRA


Housing: Aluminium profile, integrated (I) or L-shaped opal diffuser (L)
 Design: SATTLER

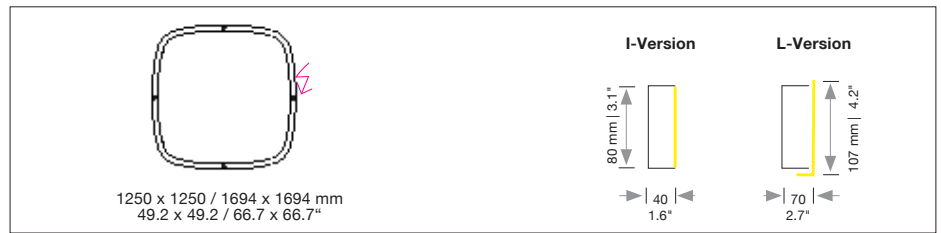


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB.




Suspension with current-carrying steel cables and cavity wall box. Not in combination with RGB.




Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy




Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, R, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"




Power supply units: (1 LED Stripe)			
Type / Size mm / inch	For use with Mounting version	Protective rating	
DE 1F 360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,G,R,K	IP 20	

Canopy: (1 LED Stripe)			
Type/ Size mm / inch	For use with Mounting version	Protective rating	
DB 290 Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (size 1250x1250)	IP 20	
DB 350 Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (size 1694x1694)	IP 20	
PB 366 Ø 90 H 366 mm / 3.5 x 14.4"	S, T	IP 20	

Colour: 12 white, similar RAL 9003, contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is 90-277 VAC 47-63 Hz

Optional



CASAMBI wall-switch

207. 00. 00. 00. 12. (white)
 207. 00. 00. 00. 10. (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.

Ceiling fixation for mounting version A

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

