


## TOCCATA



**Housing:** Pendant light with direct light distribution, 3/ 5 parts aluminium profile, with integrated opal diffuser

**Design:** MARKUS BISCHOF

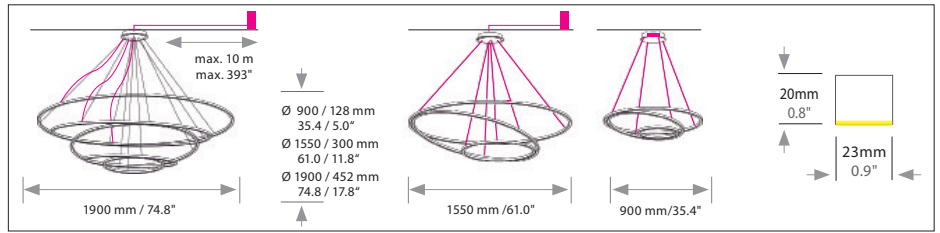

	Size: Ø mm	Inches	LED Watt	Lumen <sup>1)</sup>	Weight <sup>2)</sup> kg/lbs	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version	
Sizes	Ø 900 mm <small>*Ø900-700-380mm</small>	35.4" <small>35.4"-27.5"-14.9"</small>	83	4.840	8.0 / 17.6	777.	x x.	x x.	x x.	x x.	x x x.	x	
	Ø 1550 mm <small>*Ø1550-1240-700mm</small>	61.0" <small>61.0"-48.8"-27.5"</small>	143	8.291	11.0 / 24.2	771.	x x.	x x.	x x.	x x.	x x x.	x	
	Ø 1900 mm <small>*Ø1900-1550-1240-900-600mm</small>	74.8" <small>74.8"-61.0"-48.8"-35.4"-23.6"</small>	248	14.580	14.0 / 30.8	773.	x x.	x x.	x x.	x x.	x x x.	x	
LED CRI > 90 MacAdam 3 SELV		Standard: Warm-white	3000 K		x x x.	30.	x x.	x x.	x x.	x x x.	x		
		Optional: Neutral-white Extra warm-white	4000 K 2700 K		x x x. x x x.	40. 27.	x x. x x.	x x. x x.	x x. x x.	x x x. x x x.	x x		
Dimming		Standard: Without Dimmer			x x x.	x x.	01.	00.	x x.	x x x.	x		
		Optional: 0-10 DALI CASAMBI			x x x. x x x. x x x.	x x. x x. x x.	51. 61. 81.	00. 00. 00.	x x. x x. x x.	x x x. x x x. x x x.	x x x		
Finish	Standard:  12 white, powder coated, similar RAL 9003	Optional (Powder coated):	11 white, similar RAL 9010	10 black fine textured	30 anthracite fine textured	32 crocodile black	33 sand silver fine textured						
			34 bronze satined	35 gold	36 brass	37 bronze fine textured	38 copper						
		Optional (Premium):	22 aluminium polished	27 brush-finished aluminium		XX Custom finish	x x x.	x x.	x x.	x x.	--	x x x.	x
Power supply cable	Standard: Without power cable	Standard:  Z 70 Silver Mounting Version A,I,E											
			000 Current-carrying J,F										
			x x x.	x x.	x x.	x x.	x x.	--	x				



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

## TOCCATA




**Housing:** Pendant light with direct light distribution, 3/ 5 parts aluminium profile, with integrated opal diffuser.

**Design:** MARKUS BISCHOF

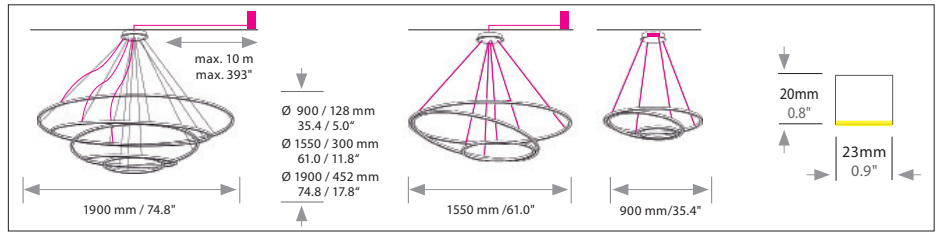


### Mounting versions


**Standard:**



Ø 900 mm / 35.4"  
4 current-carrying steel cables, with power supply in canopy




Ø 1900 mm / 74.8"  
14 suspensions through canopy and 3 power supply cables with external power supply unit in suspended ceiling




Ø 1550 mm / 61.0"  
6 current-carrying steel cables with external power supply unit in suspended ceiling.  
Optional J Ø 1900 mm  
14 current-carrying steel cables

**Optional:**



4/6/14-point suspension with external power supply unit in suspended ceiling



Ø 900 mm / 35.4"  
4 suspensions through canopy with external power supply unit in canopy

I / J = Distance of external power supply unit to light fixture max. 10m / 394".  
F, E = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

Mounting version with steel cable length 3 m / 118" and power supply cable, length 2/3 x 5 m / 2/3 x 197" (1550, 1900)

Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

-	-	-	-	-	-	-
---	---	---	---	---	---	---

Complete order number

Power supply units:		Type / Size mm / inch L x W x H	For use with Mounting version	Protective rating
	DE 1F	360 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A (Ø 900 mm)	IP 20
	DE 2F	360 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	I, J, A (Ø 1550 mm)	IP 20
	DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	I, J, A (Ø 1900 mm)	IP 20

Input voltage for all external power supply units and canopy is 90-277 VAC 47-63 Hz

Canopy:		Type / Size mm / inch Ø cover plate / body / H	For use with Mounting version	Protective rating
	DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	F, E (Ø 900)	IP 20
	DB 230S	Ø 230 / 210 / 60 mm / 9.0 x 8.3 / 2.3"	I, J (Ø 1550, 1900 mm)	IP 20

Colour: 12 white, similar RAL 9003, contact factory for other finishes

Colour: Base finish white (12), Cover white (12), contact factory for other finishes

USA/Canada: Canopy mounts to 4" octagonal junction box.

**Optional:**




**CASAMBI wall-switch**

207. 00. 00. 00. 12. (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch may be also used on its own as it is attached to the wall plate using magnets.



**Ceiling fixation for mounting version A**

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protective rating of luminaire



Direct light distribution



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.