




SATTLER

AVVENI CONCRETE



Product-information: Concrete base with one light head. The light head can be taken off and is fully adjustable through a magnetic hinge system. Light head is available as flood or spot version (lenses with 24 and 38 degrees).

Design: Ulrich Sattler | Michael Schmidt, Code2design

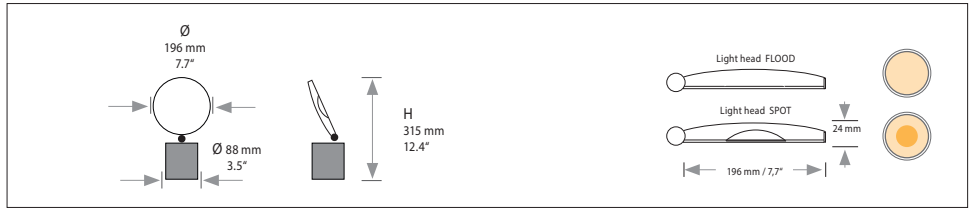

STRUCTURE

| Type | H/Ø mm | H/Ø inches | LED Watt | weight kg ²⁾ / lbs ²⁾ | STRUCTURE | | | | |
|--------------------|------------------------------------|--|--------------|---|---------------------------|----------|----------|--------------------|--|
| | | | | | Type No. | Finish 1 | DIM | Power Supply Cable | Mounting Version |
| | H 315 / Ø 88 | H 12.4" / Ø 3.5 | max. 12,5 W | 2.0 / 4.4 | 1155. | XX. | XX. | XX. | XX. |
| Finish 1 | | | | | XXXX. | 00 | XX. | XX. | XX. |
| Dimmer | | CASAMBI Head switch- and dimmable Push button for dimming | | | XXXX. | XX. | 08 07 | XX. | XX. |
| Power Supply Cable | power supply cable, 2800 mm / 110" | | 90 PVC black | Standard | XXXX. | XX. | XX. | 90 | XX. |
| Mounting Version | | pluggable on the lamp cord included country-specific plug incl. switch | | | XXXX. | XX. | XX. | XX. | 0N |
| | | | | | | | | | <input type="checkbox"/> EURO <input type="checkbox"/> UK |
| | | | | | 1155. 00 . . 90 0N | | | | Order No. STRUCTURE |

LIGHT HEAD

| Type | Finish 2 | Finish 3 | LED Kelvin | Beam angle | Type No. | Finish 2 | Finish 3 | LED | Beam angle |
|----------------------------------|------------------------|----------------------------------|-----------------------|------------|----------|----------------|----------------|----------------|------------|
| Type | | | | | 01 | XX. | XX. | XX | XX |
| Finish 2 Light head outside ring | 12 white matt RAL 9003 | 62 (14) black matt | 22 aluminium polished | Standard | XX. | 12 62 22 | XX. | XX | XX |
| Finish 3 Light head top cover | 60 silver anodised | 61 gold anodised | 62 black anodised | Standard | XX. | XX. | 60 61 62 | XX | XX |
| LED CRI >95 | | Extra warm-white 2700 K | Warm-white 3000 K | | XX. | XX | XX. | 27 30 40 | XX |
| SELV | | Neutral-white 4000 K | | | XX. | XX | XX. | 40 | XX |
| Beam Angle | FLOOD | 12,5 W 1344 ¹ Lumen | | Standard | XX. | XX | XX. | 99 | 00 |
| | SPOT 24° | 12,5 W 1174 ¹ Lumen | | | XX. | XX | XX. | 24 | 00 |
| | SPOT 38° | 12,5 W 1174 ¹ Lumen | | | XX. | XX | XX. | 38 | 00 |

Base Ø 88 mm / 3.5"
Standard: Concrete

Each concrete base is unique, inclusions and surface can vary.

Order No. LIGHT HEAD FLOOD 00 00

Order No. LIGHT HEAD SPOT 00 00

Order No. Accessories (page 2) 00 00 00 00

Input voltage for all external power supply units and canopies is 100-240 VAC 50/60 Hz

Handcrafted in Germany, certified quality
 IP 20 Protective rating
 180° Tiltable
 360° Rotatable
 Light distribution direct
 Protection class III: only suitable for very low voltage supply (<50V)
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH




CASAMBI wall-switch
CASAMBI wall-switch

white
black

207. 00. 00. 00. 11
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Ceiling Fixation



Consisting of a cavity ceiling box with 80mm round metal cover.
Applicable to mounting version B.

white

200. 00. 00. 00. 12