





SATTLER

AVVENI



DOWNLIGHT with frame

Product-information: Downlight, light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 24 and 38 degrees).
Design: Ulrich Sattler | Michael Schmidt, Code2design

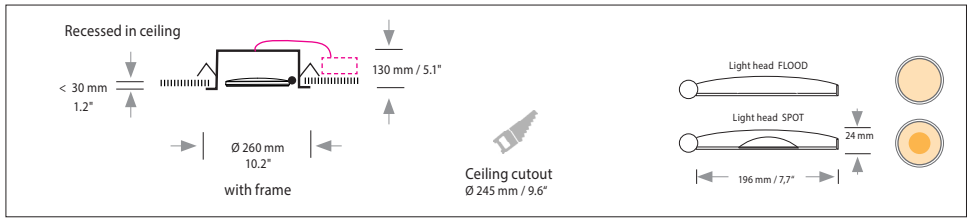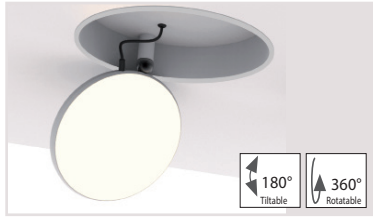

STRUCTURE

STRUCTURE					STRUCTURE				
Type	Installation Ø / depth mm	Installation Ø / depth inches	LED Watt	weight kg ² / lbs ²	Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
	Ø 245 / 130mm	Ø 9.6 / 5.1"	max. 12,5 W	2.5 / 5.5	1116.	xx.	xx.	xx.	xx.
Finish 1	Installation housing in white				xxxx.	12	xx.	xx.	xx.
Dimmer	DALI TRIAC				xxxx.	xx.	06	xx.	xx.
Power Supply Cable	without visible power supply cable				xxxx.	xx.	xx.	00	xx.
Mounting Version	V up to ceiling thickness ≤ 30 mm				xxxx.	xx.	xx.	xx.	0V

Recessed in ceiling with external power supply

OrderNo.STRUCTURE

LIGHT HEAD

					LIGHT HEAD						
Type	Finish 2	Finish 3	LED	Beam angle	Type No.	Finish 2	Finish 3	LED	Beam angle	Beam angle	Beam angle
					01	xx.	xx.	xx.	xx.	xx.	xx.
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminum polished		Standard	xx.	12	xx.	xx.	xx.	xx.
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised		Standard	xx.	xx.	60	xx.	xx.	xx.
LED		Extra warm-white	2700 K		xx.	xx.	xx.	27	xx.	xx.	xx.
CRI >95		Warm-white	3000 K		xx.	xx.	xx.	30	xx.	xx.	xx.
SELV		Neutral-white	4000 K		xx.	xx.	xx.	40	xx.	xx.	xx.
Beam Angle	FLOOD	12,5 W 1344 ¹ Lumen			Standard	xx.	xx.	xx.	xx.	99	00
	SPOT 24°	12,5 W 1174 ¹ Lumen				xx.	xx.	xx.	xx.	24	00
	SPOT 38°	12,5 W 1174 ¹ Lumen				xx.	xx.	xx.	xx.	38	00

Order No. LIGHT HEAD FLOOD

.. 00 00

Order No. LIGHT HEAD SPOT

.. 00 00

Input voltage for all external power supply units and canopies is 220-240 VAC 50-60 Hz

Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

Protective rating

Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.