





SATTLER

AVVENI PENDANT 3




Product-information: Aluminium structure with three light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 24 and 38 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

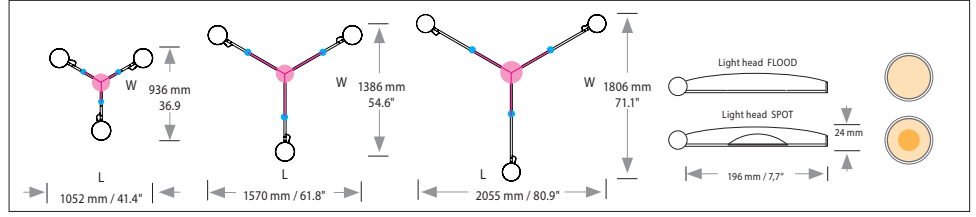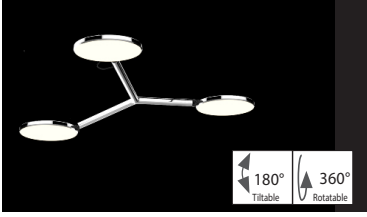

STRUCTURE


Type	L / W mm	L / W inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE					
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version	
L 1052 / W 936	L 41.4 / W 36.9"	max. 37,5 W	2.3 / 5.1	1125.	XX.	XX.	XX.	XX.		
L 1570 / W 1386	L 61.8 / W 54.6"	max. 37,5 W	2.6 / 5.7	1126.	XX.	XX.	XX.	XX.		
L 2055 / W 1806	L 80.9 / W 71.1"	max. 37,5 W	2.8 / 6,2	1127.	XX.	XX.	XX.	XX.		
Finish 1 Structure	12 white matt RAL 9003 14 black matt 22 aluminium polished	Standard	XXXX.	12	14	22	XX.	XX.	XX.	XX.
Dimmer	0-10 V DALI CASAMBI	Standard	XXXX.	XX.	05	06	08	XX.	XX.	XX.
Power Supply Cable	power supply cable, silver 5000 mm, mounting version (A/B) without power supply cable, current-carrying suspension (F + R) 3000mm (T) 5000 / 3000mm	Standard	XXXX.	XX.	XX.	70	XX.	XX.	XX.	
Mounting Version	B A F T R	Standard	XXXX.	XX.	XX.	XX.	XX.	0x.		



LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle								
				XX	XX	XX						
01	XX.	XX.	XX.	XX.	XX.	XX.						
Finish 2 Light head outside ring	12 white matt RAL 9003 62 (14) black matt 22 aluminium polished	Standard	XX.	12	62	22	XX.	XX.	XX.	XX.	XX.	XX.
Finish 3 Light head top cover	60 silver anodised 61 gold anodised 62 black anodised	Standard	XX.	XX.	60	61	62	XX.	XX.	XX.	XX.	XX.
LED	Extra warm-white 2700 K Warm-white 3000 K Neutral-white 4000 K	Standard	XX.	XX.	XX.	27	30	40	XX.	XX.	XX.	XX.
Beam Angle	FLOOD 3 x 12,5 W 1344 ¹ Lumen SPOT 24° 12,5 W 1174 ¹ Lumen SPOT 38° 12,5 W 1174 ¹ Lumen	Standard	XX.	XX.	XX.	XX.	99	24	38	00	00	00

DBS 250 Mounting Version B, R ∅ body 250 mm / 9.8" H 50 mm colour white	DB 290 Mounting Version F ∅ body 270 mm / 10.6" H 60 mm ∅ Cover plate 290 mm / 11.4"	PB 375 Mounting Version T colour finish 1 H 375 mm ∅ body 90 mm 3.5"	Quantity <input type="text"/> Order No. LIGHT HEAD <input type="text"/>	Quantity <input type="text"/> Order No. LIGHT HEAD <input type="text"/>
Input voltage for all external power supply units and canopies is 220-240 VAC 50/60 Hz			Quantity <input type="text"/> Order No. Accessories (page 2) <input type="text"/>	Quantity <input type="text"/> Order No. Accessories (page 2) <input type="text"/>



Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

AVVENI

ACCESSORIES

CASAMBI WALL SWITCH




CASAMBI wall-switch
CASAMBI wall-switch

white
black

207. 00. 00. 00. 11
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Ceiling Fixation



Consisting of a cavity ceiling box with 80mm round metal cover.
Applicable to mounting version A/B.

white

200. 00. 00. 00. 12