

SATTLER


AVVENI PENDANT 6



Product-information: Aluminium structure with six light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (9 degree beam angle with lenses for 25, 36, and 60 degrees). Cable suspensions are adjustable.


Design: Ulrich Sattler | Michael Schmidt, Code2design

www.sattler-lighting.com

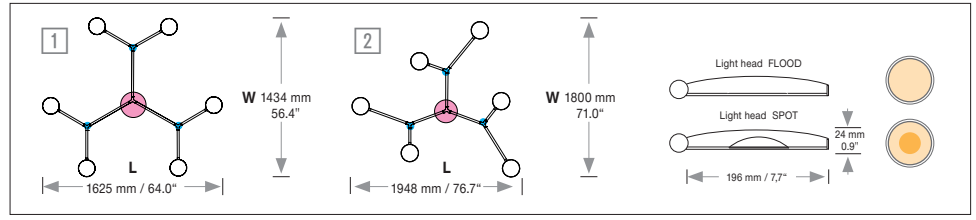

STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
1	L 1625 / W 1434	L 64.0 / W 56.4"	max. 108 W	5,1 / 11.2	1136.	XX.	XX.	XX.	XX.
2	L 1948 / W 1800	L 76.7 / W 71.0"	max. 108 W	5,4 / 11.9	1137.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminium polished	Standard	XXXX.	12	XX.	XX.	XX.
Dimmer	0 -10 V 1 -10 V DALI *CASAMBI	Standard	Standard	XXXX.	XX.	05	XX.	XX.	
Cable	power supply cable, silver, mounting version (B) 5000mm without power supply cable, current-carrying suspension (F) 3000mm (T) (a) 5000 + (b) 3000mm	Standard	Standard	XXXX.	XX.	XX.	70	XX.	
Mounting Version	B Standard	F	T	XXXX.	XX.	XX.	XX.	0x.	




Order No. STRUCTURE

..... 0.

LIGHT HEAD

Type	Finish 2	Finish 3	LED		Kelvin	Beam angle	XX	XX	XX		
			XX	XX							
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black anodised	22 aluminium polished	Standard	XX.	12	XX.	XX.	XX.	XX.	XX.
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised	Standard	XX.	XX.	60	XX.	XX.	XX.	XX.
LED	36V, CRI >95	Extra warm-white 2700 K	Warm-white 3000 K	Neutral-white 4000 K	XX.	XX.	XX.	27	XX.	XX.	XX.
Beam Angle	FLOOD	6 x 17 W 1344¹ Lumen	SPOT 9°	19 W 1268¹ Lumen	XX.	XX.	XX.	XX.	99	00	00
			*SPOT 25°	19 W 1174¹ Lumen	XX.	XX.	XX.	XX.	09	00	00
			*SPOT 36°	19 W 1174¹ Lumen	XX.	XX.	XX.	XX.	25	00	00
			*SPOT 60°	19 W 1174¹ Lumen	XX.	XX.	XX.	XX.	36	00	00

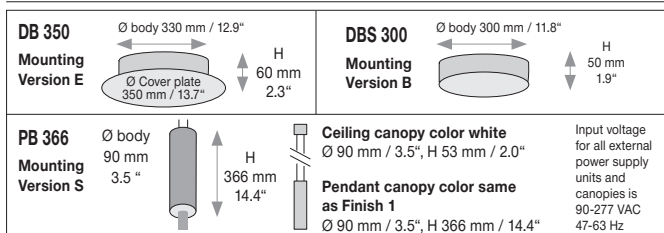

Quantity Order No. LIGHT HEAD FLOOD .. 00 00

Quantity Order No. LIGHT HEAD SPOT .. 00 00

Flood and spot heads may be mixed within one structure

Quantity Order No. Accessories (page 2) .. 00 00 00 00


Handcrafted in Germany, certified quality
 Protective rating
 180° Tilttable
 360° Rotatable
 Light distribution direct
 Protection class III: only suitable for very low voltage supply (<50V)
 Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.

31.5.17 AVVENI PENDANT 6





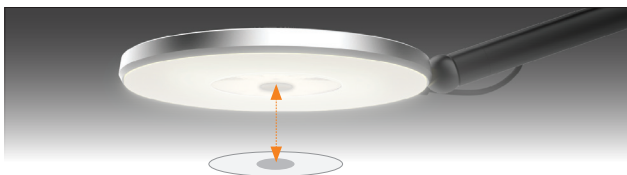

SNAP SYSTEM

Snap-on lenses only applicable for AVVENI LIGHT HEAD SPOT.

**BEAM ANGLE LENSES**

Spot-light lenses* magnetic snap-on lenses to change the beam angle

Type No.:

	25°		Spot	1163. 00. 00. 00. 00
	36°		Spot	1164. 00. 00. 00. 00
	60°		Spot	1165. 00. 00. 00. 00










Elliptical lens* magnetic snap-on lenses for asymmetrical light beam

	10-36°		Ellipse	1166. 00. 00. 00. 00
---	---------------	---	---------	-----------------------------

*approx. 10% reduction of the lumen output

LIGHT COLOUR LENSES

Colour temperatur lenses* magnetic snap-on lenses that shift colour temperature

Starting light colour KELVIN (K)	2700 	3000 	4000 	
CTO 1/4	 2450 	2700 	3500 	1160. 00. 00. 00. 00
CTO 1/2	 2200 	2400 	3000 	1161. 00. 00. 00. 00
CTO 3/4	 2000 	2200 	2700 	1162. 00. 00. 00. 00

*reduction of the lumen output : CTO 1/4 = 10%, CTO 1/2 = 25%, CTO 3/4 = 40%

ANTI GLARE PROTECTION

Louver snap - magnetic snap-on adaptor to eliminate high angle glare



1167. 00. 00. 00. 00

LENS SETS

Complete set:	3 x spot-light lenses, 1 x elliptical lens, 3 x light colour lenses, 1 x anti glare protection	1171. 00. 00. 00. 00
Beam Angle Set:	3 x spot-light lenses, 25°, 36°, 60°	1172. 00. 00. 00. 00
Light Colour Set:	3 x light colour lenses, CTO 1/4, CTO 1/2, CTO 3/4	1173. 00. 00. 00. 00

Combinations of up to three lenses are possible

CASAMBI WALL SWITCH

CASAMBI wall-switch

white


207. 00. 00. 00. 11

CASAMBI wall-switch

black

207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

Ceiling Fixation

Consisting of a cavity ceiling box with 80mm round metal cover.

Applicable to mounting version B.

white

200. 00. 00. 00. 11