



SATTLER


AVVENI

PURE CEILING / WALL




Product-information: Aluminium structure with 1 light head. Light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 24 and 38 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

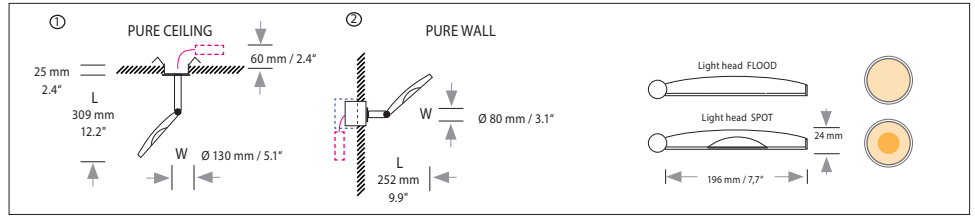


STRUCTURE

Type	W Ø / L mm	W Ø / L inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM	Power Supply Cable	Mounting Version
PURE CEILING	① Ø 130 / 309	Ø 5.1 / 12.2	12,5 W	1.0 / 2.2	1114.	XX.	XX.	XX.	XX.
PURE WALL	② Ø 80 / 252	Ø 3.1 / 9.9	12,5 W	1.0 / 2.2	1111.	XX.	XX.	XX.	XX.
Finish 1 Structure	12 white matt RAL 9003	14 black matt	22 aluminium polished		XXXX.	12	XX.	XX.	XX.
Dimmer	DALI-2 TRIAC		Standard		XXXX.	XX.	06	XX.	XX.
Power Supply Cable	without power supply cable				XXXX.	XX.	XX.	00	XX.
Mounting Version	U with ceiling thickness ≤ 25 mm				XXXX.	XX.	XX.	XX.	0U



Pure ceiling / wall
Space for external power supply must be considered



- ① PURE CEILING cutout ceiling: Ø 100 mm / 3.9"
- ② PURE WALL cutout wall: Cavity wall socket Ø 68 mm / 2.7" suitable for cavity wall or switch socket, mounting cover with 2 screws

Order No. STRUCTURE

LIGHT HEAD

Type	Finish 2	Finish 3	LED Kelvin	Beam angle	Type No.	Finish 2	Finish 3	LED	Beam angle
Type					01	XX.	XX.	XX.	XX.
Finish 2 Light head outside ring	12 white matt RAL 9003	62 (14) black matt	22 aluminium polished		Standard	XX.	12	XX.	XX.
Finish 3 Light head top cover	60 silver anodised	61 gold anodised	62 black anodised		Standard	XX.	XX.	60	XX.
LED	LED	Extra warm-white 2700 K	Warm-white 3000 K	Neutral-white 4000 K	XX.	XX.	XX.	27	XX.
Beam Angle	FLOOD	12,5 W 1282 ¹⁾ Lumen			Standard	XX.	XX.	XX.	99 00 00
	SPOT 24°	12,5 W 1229 ¹⁾ Lumen				XX.	XX.	XX.	24 00 00
	SPOT 38°	12,5 W 1229 ¹⁾ Lumen				XX.	XX.	XX.	38 00 00

Order No. LIGHT HEAD FLOOD

Order No. LIGHT HEAD SPOT

Input voltage for all external power supply units and canopies is 220-240 VAC 50-60 Hz

Handcrafted in Germany, certified quality

IP 20

Protective rating

180°

Tilttable

360°

Rotatable

Light distribution direct

Schutzklasse II Protection class II

F

Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.